



■ PRODUCT DRAWING

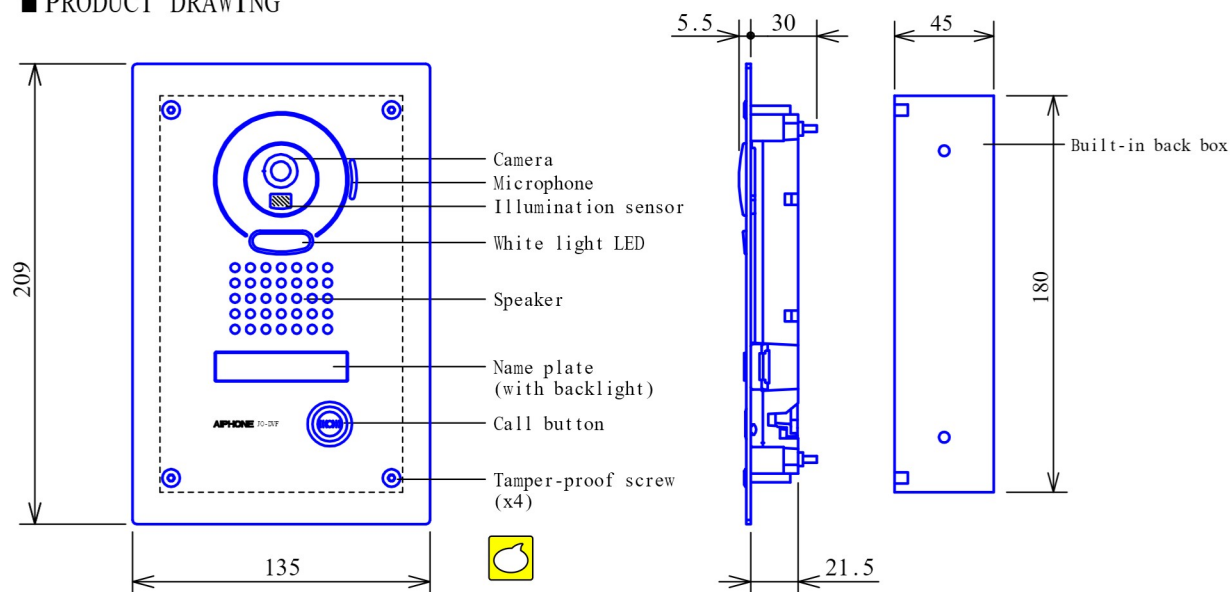


● MOUNTING

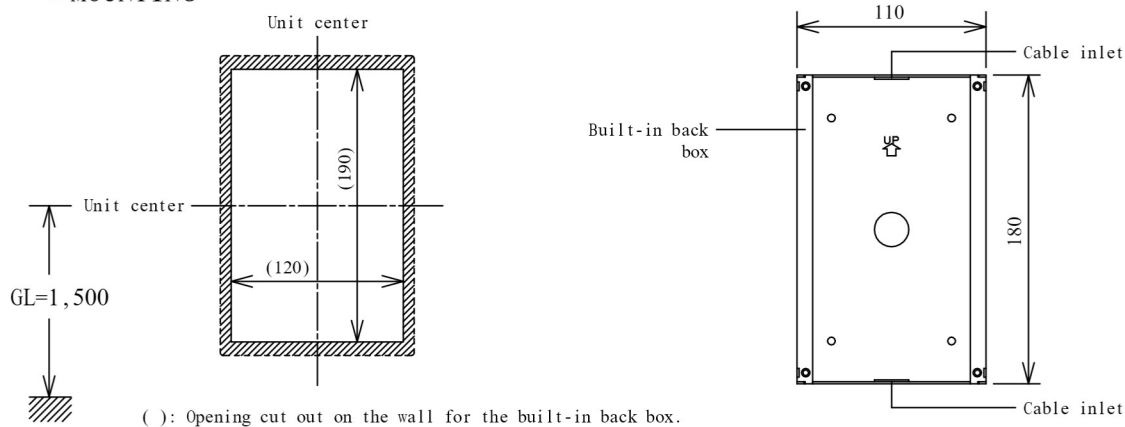


■ SPECIFICATIONS

Power source	Supplied from Master monitor station or Expansion monitor station			
Type of communication	Open voice hands-free communication			
Camera	1/4 inch color CMOS			
Minimum illumination	5 lux (approx.)			
Ambient temperature	-20~+60°C			
Mounting	Flush mount			
Electrical box	Not used(Mounts on built-in back box)			
Material	Front panel: Stainless steel. Main unit: Flame resisting PC + ABS resin			
Weight	580g (approx.) (1.27 lbs)			
Unit color	Front panel: Silver (Stainless steel, vertical hair-line processed.) Back box: Black			
IP rating	IP54			
IK rating	IK07			
DESCRIPTION VIDEO DOOR STATION (Color, Vandal-resistant)	FIG. NAME PRODUCT/SPECIFICATIONS		UNIT mm	DATE 10 June, 2013
MODEL NO. JO-DVF	FIG.NO. 59295-1-2	PAGE 1/2	REVISION 1	AIPHONE

■ WIRING DIAGRAM

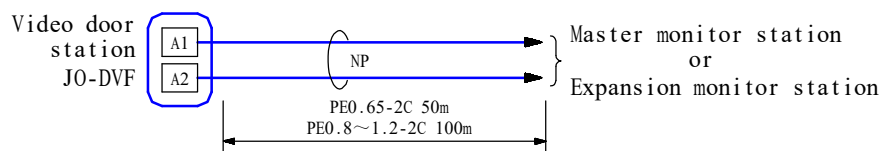


■ IMAGE VIEW AREA & MOUNTING HEIGHT

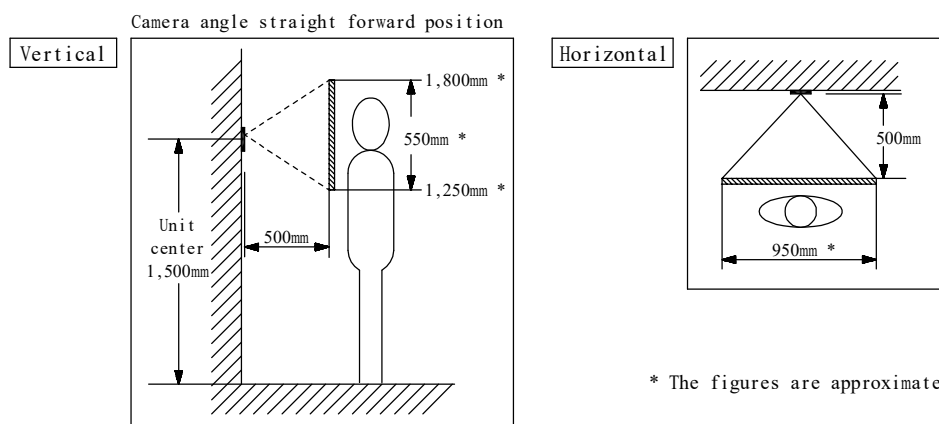


■ RESTRICTIONS


- Do not have rain escape openings on bottom covered with caulking seals.
- J0-DVF door station is exclusively used for J0 Series.
- Avoid installing J0-DVF door station in the following locations;



At the entrance where background is sky in upper floors of building, etc.



The background of the standing caller's is white wall.



Where the standing location is strongly sunlit.

■ FUNCTIONS

- Initiating a call to and entering communication with Master monitor station or Expansion monitor station.
- Name plate is backlit constantly.
- White light LED turns on during low-light conditions when monitoring and talking status.

DESCRIPTION	(Color, Vandal-resistant)	FIG. NAME	UNIT	DATE
VIDEO DOOR STATION		WIRING/ IMAGE/RESTR./FCN.	mm	10 June, 2013
MODEL NO.		FIG.NO.	PAGE	REVISION
J0-DVF		59295-2-2	2/2	1

AIPHONE