

JP-DA/DV/DVF

Video Door Stations for the JP Series



DESCRIPTION

The JP-DA is a surface mount plastic video door station. The JP-DV is an aluminum die cast surface mount video door station. The JP-DVF is a stainless steel flush mount video door station. All of these units work with the JP Series and connect to the master station using an 18AWG 2-conductor solid core cable. Each unit includes a camera, microphone, speaker, and call button. Tamper resistant screws are provided for mounting the JP-DV and JP-DVF stations.

When the call button on the door station is pushed, the inside master station(s) ring and the video screen displays the image from the door station's camera. The master station initiates communication, and the person at the door station speaks hands-free.

The JP door stations can be located up to 330' from the master monitor using 18AWG 2 conductor solid core cable (Aiphone wire #871802). Additional equipment is available to extend the wire distance up to 980' to the door (JPW-BA long distance adaptor).




FEATURES

- Video camera with audio intercom
- Pan Tilt Zoom camera lens
- Two-way hands-free voice communication
- Call button to initiate call to master stations
- White LED illuminator for low light conditions
- Simple 2-conductor wiring
- Surface (JP-DA, JP-DV) or flush mount (JP-DVF)
- 330' wiring distance to Master on 18AWG 2 conductor cable

JP-DA/DV/DVF

Camera Door Stations for the JP Series

FEATURE CALL-OUT

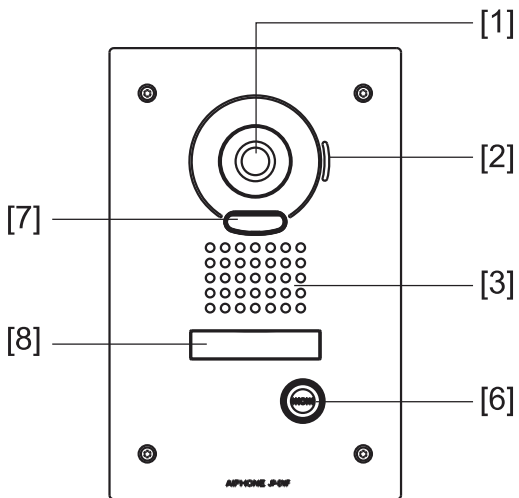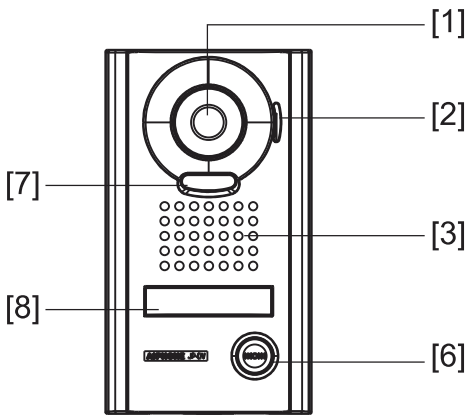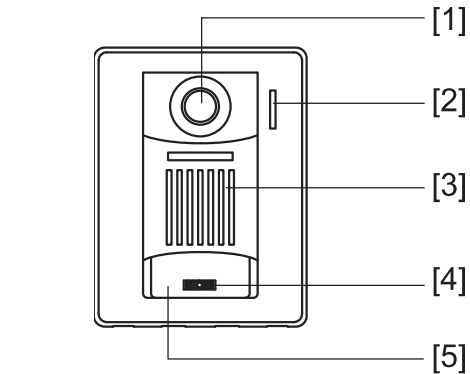

- [1] Camera
- [2] Microphone
- [3] Speaker
- [4] Red locator LED (JP-DA only)
- [5] Call button with LED illuminators
- [6] Call button
- [7] LED illuminator
- [8] Directory Card (JP-DV & JP-DVF only)

SPECIFICATIONS:

Power Source:	Supplied from JP Series Master
Communication:	Hands-free
Camera:	CMOS
Min. illumination:	5 lux
Camera angle:	Wide (approx. 170°) with digital PTZ
Wiring:	2-conductor, PE insulation, Aiphone wire #871802
Wiring Distance:	330'
Operation Temp:	
JP-DA	-40~140° F (-40~60° C)
JP-DV	-4~140° F (-20~60° C)
JP-DVF	-4~140° F (-20~60° C)
Dimensions (HxWxD):	
JP-DA	5-1/16" x 3-13/16" x 1-3/16" (129 x 97 x 30.5 mm)
JP-DV	6-13/16" x 3-7/8" x 1" (173 x 98 x 25 mm)
JP-DVF	8-1/4" x 5-5/16" (209 x 135 mm)
Weight: (approx)	JP-DA: 0.37lbs (170g) JP-DV: 1.43lbs (650g) JP-DVF: 1.26lbs (570g)