


RP-28

Remote Wall Plate

Remote wall plate with red LED. See Options for plate size and LED selections.

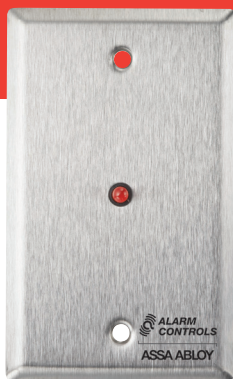

RP-28

Features

Standard Features

- **RP-28** 1/4" red LED
- Switch mounted on single gang wall plate with stainless steel finish

Options

- **RP-28L** with 1/2" red LED
- **RP-28BI** with 1/4" bi-colored LED
- **RP-28FLASHING** 1/4" flashing LED
- **RP-28SL** 1-1/2" plate
- **RP-28302** with waterproof 302 plate
- **RP-28L302** with weatherproof 302 plate and 1/2" LEDs
- Finishes: multiple plate finishes available

Specifications

Dimensions

- 2-3/4"W x 4-1/2"H

Electrical

- 1/4" LED operates on 12 or 24 VDC, current draw 8mA at 12 VDC, 12mA at 24VDC
- 1/2" LED operates on 12 or 24 VDC, current draw 9mA at 12 VDC, 19mA at 24VDC
- LEDs have flying leads

RP-29

Remote Wall Plate

Single gang remote wall plate with green LED. See Options for plate size and LED selections.



RP-29L

Features

Standard Features

- **RP-29** 1/4" green LED
- Switch mounted on single gang wall plate with stainless steel finish

Options

- **RP-29L** with 1/2" green LED
- **RP-29SLIMLINE** 1-1/2" plate
- **RP-29L302** 1/2" LEDs and weatherproof 302 plate
- **RP-29LSLIMLINE** 1/2" LED and 1-1/2" plate
- Finishes: multiple finishes available

Specifications

Dimensions

- 2-3/4"W x 4-1/2"H

Electrical

- 1/4" LED operates on 12 or 24 VDC, current draw 8mA at 12 VDC, 12mA at 24VDC
- 1/2" LED operates on 12 or 24 VDC, current draw 9mA at 12 VDC, 19mA at 24VDC
- LEDs have flying leads