

AL1024NKA8

Dual Voltage Access Power Controller with Power Supply/Charger

Ordering# AL1024NKA8

Kit Contents: AL1024ULX with VR6 and ACMS8 UL Listed Sub-Assemblies

Altronix AL1024NKA8 sub-assembly kit converts a 115VAC 60Hz input into eight (8) fuse protected outputs. Outputs are individually selectable, providing 12VDC or 5VDC up to 6A and/or 24VDC up to 10A (240W total power) for access control panels, door locks, and ancillary devices. Power outputs can be converted to dry form “C” contacts. Outputs are activated by an open collector sink, normally open (NO), normally closed (NC) dry trigger input, or wet output from an Access Control System, Card Reader, Keypad, Push Button, PIR, etc. AL1024NKA8 will route power to a variety of access control hardware devices including Mag Locks, Electric Strikes, Magnetic Door Holders, etc. Outputs will operate in both Fail-Safe and/or Fail-Secure modes. The FACP Interface enables Emergency Egress, Alarm Monitoring, or may be used to trigger other auxiliary devices. The fire alarm disconnect feature is individually selectable for any or all of the eight (8) outputs. The spade connectors allow you to daisy chain power to multiple ACMS8 modules. This feature allows you to distribute the power over more outputs for larger systems.



AL1024NKA8

Key Features

- Unit provides 12VDC or 5VDC up to 6A and/or 24VDC up to 10A (240W total power)
- Short circuit and overvoltage protection
- Supervision
 - AC Fail
 - Battery Fail and Battery Presence
- Bi-colored LEDs provide visual verification of voltage on each output
- Stackable sub-assemblies save valuable space
- Built-in charger for sealed lead acid or gel type batteries
- Instantaneous transfer to stand-by batteries
- Eight (8) independently controlled outputs
- Eight (8) auxiliary power outputs (unswitched).
- Filtered and electronically regulated outputs
- Fire Alarm disconnect (latching or non-latching) is individually selectable for any or all of the eight (8) outputs
- Kit contents are UL Listed sub-assemblies
- CE European Conformity

Lifetime Warranty

Altronix Corporation | 140 58th St | Brooklyn, NY 11220 USA
phone: +1 718.567.8181 | fax: +1 718.567.9056 | email: info@altronix.com | www.altronix.com



AL1024NKA8

Dual Voltage Access Power Controller with Power Supply/Charger

Specifications

Power Supply (AL1024ULXB2):

Input

Voltage	115VAC 60Hz, 4.2A max
Fusing	5A/250V

Outputs

Voltage	24VDC
Current	10A @ 24VDC continuous max.
Other	Overvoltage protection Filtered and regulated

Battery Charging

Capacity	12AH/12VDC (2 within enclosure) 40AH/65AH (requires separate enclosure)
Type	Sealed lead acid or gel type
Failover	Upon AC loss, instantaneous
Batteries are sold separately	

Supervision

AC Failure	Form "C" contacts
Battery	Form "C" contacts

Indicators (LED)

Input	115VAC is present
DC Output	Powered
Battery	Discharged or not connected

Dual Input Access Power Controller (ACMS8):

Input

Voltage	24VDC from AL1024ULXB2 and 12VDC from VR6
Input Fuses	15A/32V

Outputs

Voltage	12 or 24VDC individually selectable
Eight (8) selectable 12VDC or 24VDC independently controlled outputs or eight (8) independently controlled Form "C" relay outputs:	
a) Fail-Safe and/or Fail-Secure power outputs	
b) Form "C" Relays. 28VAC or VDC @ 2.5A Rated	
c) Auxiliary power outputs (unswitched)	
d) Any combination of the above	
Any of the eight (8) fuse protected power outputs are selectable to follow power Input 1 or Input 2	
Individual outputs may be set to OFF position for servicing	

Output Fuses	3A/32V
--------------	--------

Indicators (LED)

Red LEDs	Outputs are triggered (relays energized)
Blue LED	FACP disconnect is triggered
Out1 - Out8	Bi-colored LEDs indicate 12 or 24VDC

Voltage Regulator (VR6):

Input

Voltage	24VDC from AL1024ULXB2
---------	------------------------

Output

Voltage	12VDC
Current	6A continuous
Other	Surge suppression

Indicators (LED)

Input	24VDC is present
Output	Powered

Agency Listings

AL1024ULXB2

Access Control	UL294
Burglar Alarm	UL603
Fire Alarm	UL1481
Signal Equipment	CSA C22.2 No.205-M1983

VR6

Access Control	UL294, ULC-S319
CE	European Conformity

ACMS8

Access Control	UL294, ULC-S319
CE	European Conformity

Physical and Environmental

Dimensions (H x W x D)

Enclosure:	15.5" x 12" x 4.5" (393.7mm x 304.8mm x 114.3mm)
Shipping:	16.5" x 13.5" x 6" (419.1mm x 342.9mm x 152.5mm)

Enclosure accommodates up to two (2) 12VDC/12AH batteries

Weight (approx.)

Product:	9.4 lb. (4.26 kg)
Shipping:	10.5 lb. (4.76 kg)

Temperature

Operating:	0°C to 49°C (32°F to 120°F)
Storage:	-20°C to 70°C (-4°F to 158°F)

Relative Humidity

	85% +/- 5%
--	------------

BTU/Hr. (approx.)

	123 BTU/Hr.
--	-------------

Lifetime Warranty


Altronix Corporation | 140 58th St | Brooklyn, NY 11220 USA

phone: +1 718.567.8181 | fax: +1 718.567.9056 | email: info@altronix.com | www.altronix.com

Dimensions and Drawing

Dimensions (H x W x D approximate)

15.5" x 12" x 4.5" (393.7mm x 304.8mm x 114.3mm)

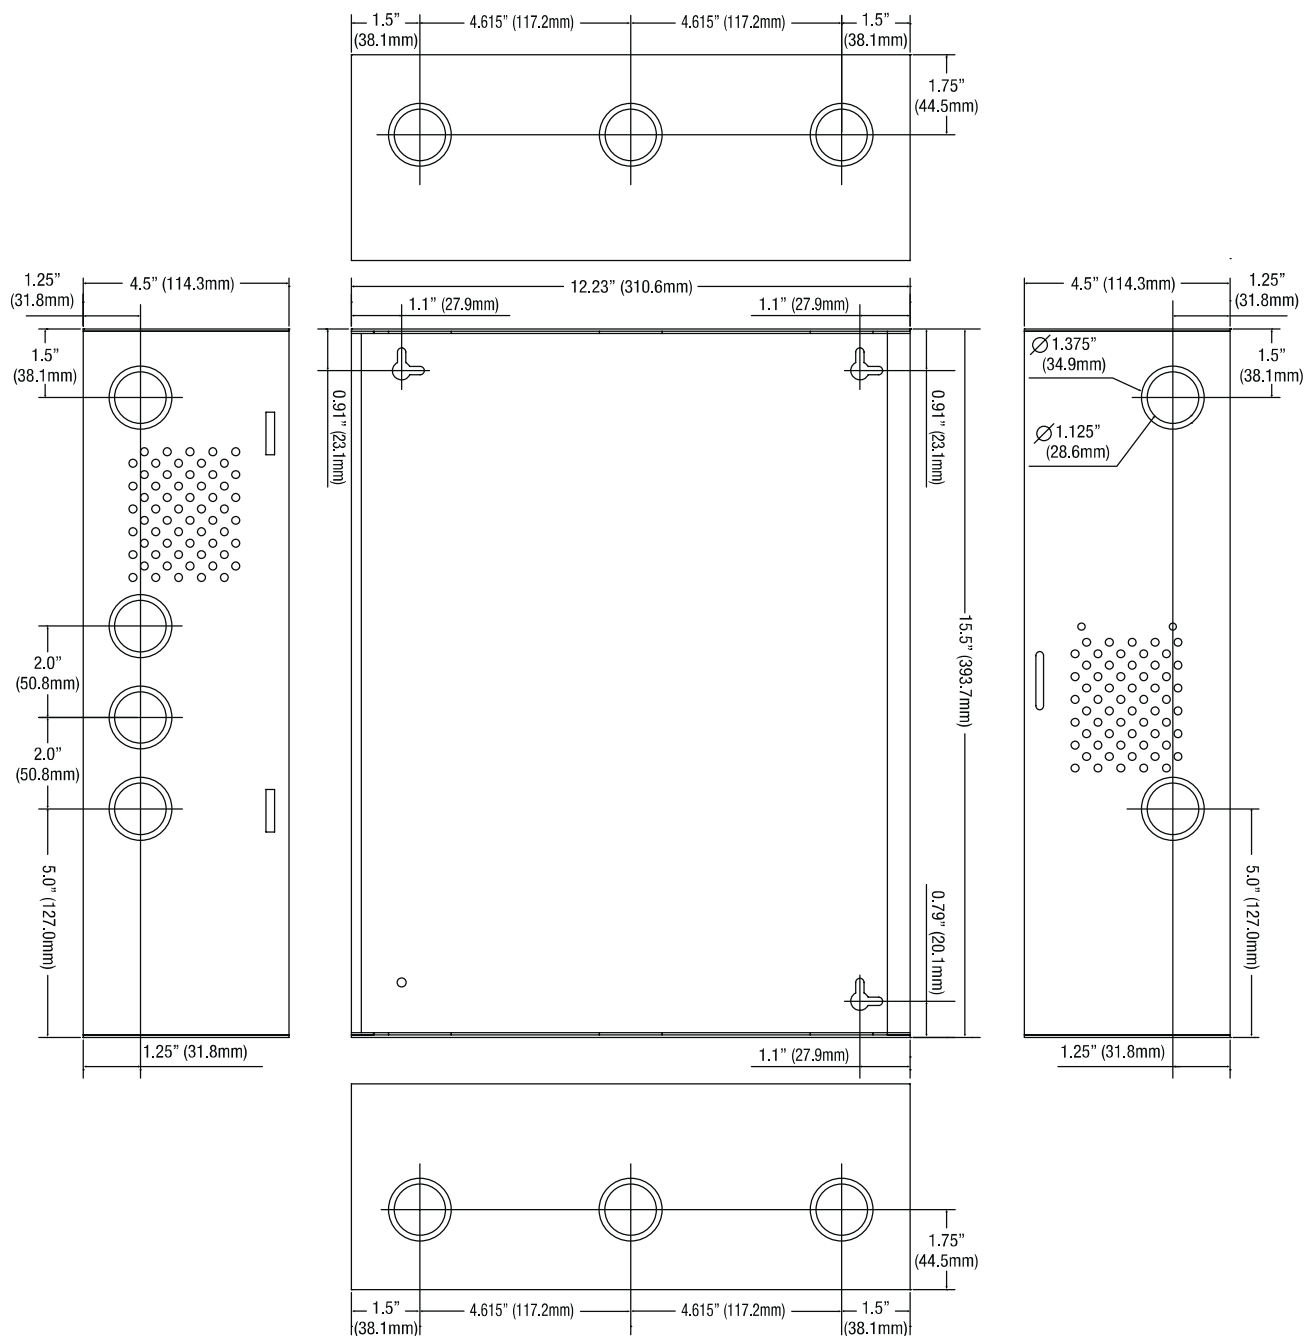

Lifetime Warranty

Altronix Corporation | 140 58th St | Brooklyn, NY 11220 USA

phone: +1 718.567.8181 | fax: +1 718.567.9056 | email: info@altronix.com | www.altronix.com