

BC400

Power Supply/Battery Enclosure

Altronix BC400 is a UL Recognized NEMA 1 Rated power supply/battery enclosure that can accommodate a wide variety of Altronix power supplies, sub-assemblies, and accessories. Altronix enclosures feature ample knockouts that are suitable for 0.75" and 1" conduits.

For red enclosure refer to model BC400R



BC400


BC400 with optional
12VDC/12AH batteries

Specifications

Features

- 18 Gauge steel enclosure
- Ample knockouts accommodating either 0.75" or 1" conduits for convenient access
- Includes camlock and two self-tapping screws to secure door

Capacity

- Enclosure accommodates up to two (2) 12VDC/12AH batteries

Agency Listings

Component Enclosure USR, CNR:
UL Recognized

Physical and Environmental

Dimensions (H x W x D)

Enclosure:
15.5" x 12.23" x 4.5" (393.7mm x 310.6mm x 114.3mm)


Shipping:
16.5" x 13.5" x 6" (419.1mm x 342.9mm x 152.5mm)

Weight (approx.)

Product: 7.8 lb. (3.54 kg)

Shipping: 9.1 lb. (4.13 kg)

Accessories (order separately)

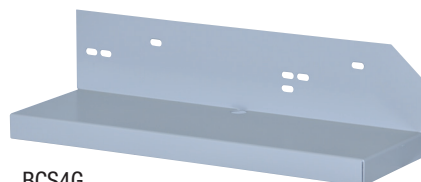

BCS4G

BCS4G

Grey bracket fits BC400 enclosure to allow additional two (2) 12VDC/12AH batteries
Increases capacity to up to four (4) 12VDC/12AH batteries
For BC400 with BCS4G installed, order model BC400SG



BC400SG



WM5

WM5, WM25, WM100 - Magnetic Cable Tie Mounts

Altronix WM5, WM25, and WM100 are packs of 5, 25 or 100 magnetic cable tie mounts respectively. They accommodate standard zip ties or velcro straps. These are ideal for wire management in our enclosures.




Mounting Magnet

MM4, MM8, MM12, MM24 - Magnetic Mounting Solution

Altronix mounting magnets accommodate screws and nylon standoffs to allow for mounting various boards/accessories in any metal enclosure or backplane.

Product Position Chart for the Following Models:

Power Supply/Chargers: AL300ULXB, AL400ULXB2, AL600ULXB, AL1012ULXB, AL1024ULXB2, eFlow3NB, eFlow4NB, eFlow6NB, eFlow102NB, eFlow104NB, eFlow15UB, Tango1B, POE75, POE201, POE240, POE360, POE367, OLS75, OLS120, OLS120D2, OLS180, OLS200, OLS250, OLS350 (220VAC Input power supply/chargers are also accommodated)	(A)
Sub-Assemblies: ACM8(CB), ACMS8(CB), ACMS12(CB), LINQ8ACM(CB)	
AL175ULB, AL176ULB, AL201ULB, ACM4(CB), LINQ8PD(CB), MOM5, PD4UL(CB), PD8UL(CB), PDS8(CB), PDS16(CB), NetWay5A, NetWay5B, NetWay5BT(Q), NetWay5P(Q), NetWay5ES(Q), VR6, VR10	(B)

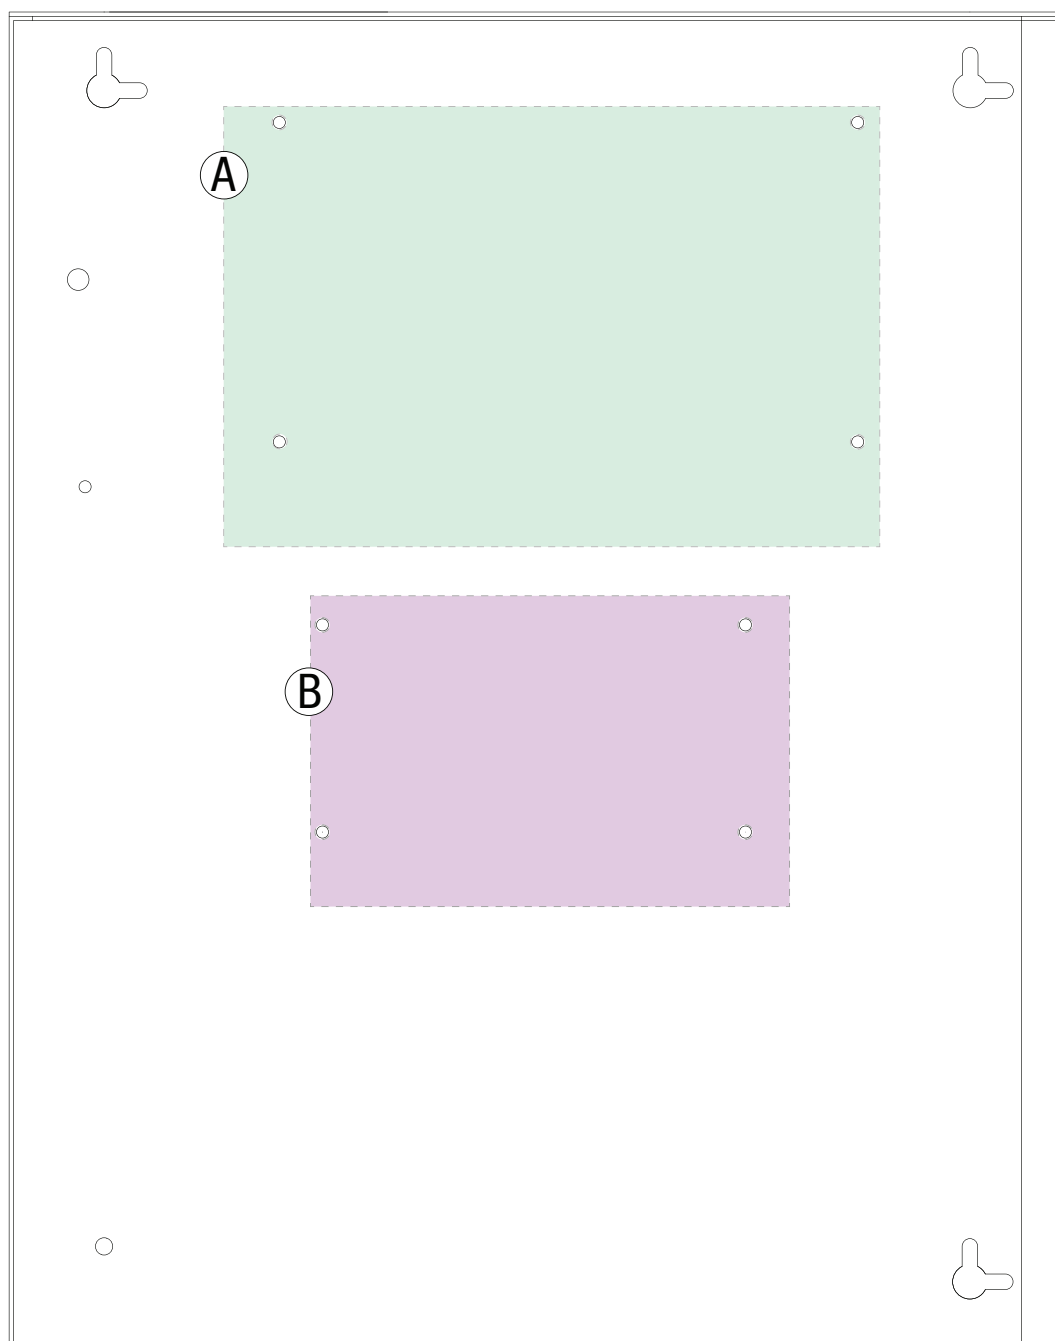

Dimensions and Drawing

Dimensions (H x W x D approximate)

115.5" x 12.23" x 4.5" (393.7mm x 310.6mm x 114.3mm)

