

Installation Guide

Overview:

Altronix LPD is a convenient way to add a low battery or low power disconnect feature to any 12 or 24VDC power supply rated up to 8A. 12VDC and 24VDC threshold is adjustable for added flexibility.

Specifications:

Input:

- Input voltage: 12VDC or 24VDC max., 8A.

Operating Voltages (factory set):

- Low voltage cutoff:
 - 12VDC: 10.5 volts (+/- 0.3 volts)
 - 24VDC: 20 volts (+/- 0.3 volts).
- Restore voltage threshold:
 - 12VDC: 11.5 volts (+/- 0.3 volts)
 - 24VDC: 23 volts (+/- 0.3 volts).

Relay:

- Relay contact rating 8A max.

Mechanical:

- Product weight (approx.): 0.12 lbs. (0.05 kg).
- Shipping weight (approx.): 0.15 lbs. (0.07 kg).

Board dimensions (W x L x H):

2" x 2.75" x 1" (50.8mm x 69.9mm x 25.4mm)

Voltage Selection Chart:


Output Voltage	SW1	SW2
12VDC	OFF	ON
24VDC	ON	OFF

Installation Instructions:

Low Battery Disconnect Application:

1. Set the LPD to desired operating voltage via SW1 & SW2 (*see Voltage Selection Chart*).
2. Connect power supply Battery Terminals to the LPD terminals marked [+ INPUT -] (*Fig. 1 below*).
3. Connect the Stand-by Battery to the LPD terminals marked [- OUT +] (*Fig. 1 below*).


Fig. 1

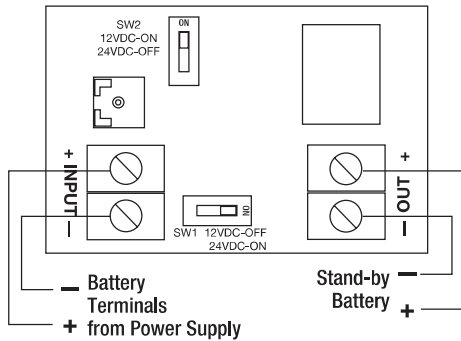

Low Power Disconnect Application:

1. Set the LPD to desired operating voltage via SW1 & SW2 (*see Voltage Selection Chart*).
2. Connect power supply DC Output Terminals to the LPD terminals marked [+ INPUT -] (*Fig. 2 below*).
3. Connect the device to be powered to the LPD terminals marked [- OUT +] (*Fig. 2 below*).

Fig. 2

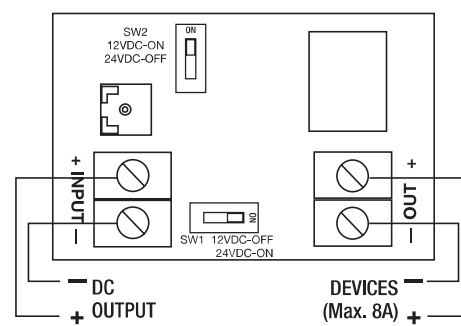

Altronix is not responsible for any typographical errors.

140 58th Street, Brooklyn, New York 11220 USA | phone: 718-567-8181 | fax: 718-567-9056
 website: www.altronix.com | e-mail: info@altronix.com | Lifetime Warranty
 IILPD - Rev. 082016 L13U

