



Pace2KRT

Long Range Single Pair (UTP)

Ethernet Adapter Kit

Kit includes Pace1KR Receiver and Pace2KT Transceiver



Installation Guide

Overview:

Altronix Pace2KRT is a long-range Ethernet adapter kit solution that transmits data and power via twisted pair (2-wire, UTP or shielded) in a PoE(+) compliant format. In addition to new SPE (UTP) Ethernet network installations for Surveillance-cameras/Security/Industrial/BMS/HVAC/Elevator Controllers, applications include upgrading of legacy networks, i.e. LONworks, RS485, 4-20ma Control Loops, etc. by using the existing two wire cabling, thus saving rip-out & reinstallation costs.

Operationally, the Pace1KR is connected to a POE midspan/endspan switch at the headend and passes network data and power to the Pace2KT from the switch via UTP up to 1km (1,000m, 3,280 ft.) to two (2) remote 10/100 POE devices, such as a camera/s or controllers. Data is only supplied to the remote device for non-enabled devices. Cable distances and multi-node device drop-offs are facilitated by using one of the two Pace2KT ports for the continued network link in a daisy chain manner.

Features:

Input (Pace1KR Receiver):

- Powered by midspan or endspan.
PoE compliant to IEEE 802.3af (15W) and
PoE+ compliant to IEEE 802.3at (25W).

UTP Connection:

- Wire type: Twisted pair (2-wire, UTP or shielded).
- Speed: 10Mbps
- Distance: 1km (1,000m, 3,280 ft.),
16/2 AWG or higher @ 10Mbps
(see *Maximum Length of Cable Type vs.
Total Power Consumption*, pg.4)

Ethernet Connection:

- Connectivity: RJ45, auto-crossover.
- Wire type: 4-pair CAT5e or higher.
- Distance: up to 100m from midspan to
Pace1KR receiver (headend),
100m from Pace2KT transceiver to device
- Speed: 10/100BaseT, half/full duplex, auto
negotiation. PoE compliant to IEEE 802.3af (15W)
and PoE+ compliant to IEEE 802.3at (25W)
delivered to device by Pace1KR.
Power provided by Pace1KR to Pace2KT
by PoE protocol (See note on Page 4).

LED Indicators:

- **Pace1KR and Pace2KT:**
Link LED: Green, PoE Active (left of UTP link)
Link LED: Green, Active Indicate
Data transmission (Next to Ethernet link)
- **Pace1KR and Pace2KT: (RJ45 jack(s)):**
Yellow and Green LED IP Link status,
10/100Base-T/active.

Environmental:

- **Operating Temperature:**
– 40°C to 75°C (– 40°F to 167°F).
- **Storage Temperature:**
– 40°C to 75°C (– 40°F to 167°F).
- Relative humidity:
20 to 85%, non-condensing.

Functions:

- Auto detection and protection of legacy
non-PoE cameras/devices.

Applications:

- Upgrade LONworks, RS485, 4-20mA control
loops to Ethernet over existing wire pair.
- Building Automation, Elevator Systems,
HVAC, Lighting, Surveillance & Security.
- Utilize twisted pair for new installations or retrofit of
IP devices over existing twisted pair cabling
- Extend Network link distance in an
industrial environment over 1km (1,000m, 3,280 ft.).
- Works with Megapixel, HD720, HD1080
and VGA (SD) cameras with proper
headend equipment.

Mechanical:

- Dimensions (W x L x H approx.):
Pace1KR and Pace2KT:
3.8" x 2.5" x 1" (96.5mm x 63.5mm x 25.4mm).

*For single port connectivity please refer to kit
model: Pace1KRT*

Installation Instructions:

Wiring methods shall be in accordance with the National Electrical Code/NFPA 70/ANSI, and with all local codes and authorities having jurisdiction. Wiring should be UL Listed and/or Recognized wire suitable for the application. Pace1KR and Pace2KT are not intended to be connected to outside plant leads and should be installed indoors within the protected premises. Pace1KR and Pace2KT are intended for indoor use only.

1. Pace1KR installation:


- Secure unit to the desired mounting surface with a proper fastening device utilizing the unit's mounting hole (*Fig. 2a, 3a, pg. 3*). Unit should be mounted in proximity to ethernet switch/network, NVR or video server.
- Connect structured cable from ethernet midspan or endspan device to RJ45 jack marked [PoE Input] (*Fig. 2, 3, pg. 3*).
- UTP / 2-wire:** Connect UTP to connector marked [+ , -] (*Fig. 2, 3, pg. 3*).

2. Pace2KT installation:


- Secure unit to the desired mounting surface with a proper fastening device utilizing the case's mounting hole. Unit should be mounted in the proximity of camera/device.
- Connect structured cable from IP camera/device to RJ45 jack marked [PoE Out] (*Fig. 2, 3, pg. 3*).
- If using multiple Pace2KRT kits, connect structured cable to the next Pace1KR's RJ45 jack marked [PoE Input] (*Fig. 3, pg. 3*). Either [PoE Out] port can be used.
- Connect UTP to the connector marked [+ , -] from receiver (Pace1KR) (*Fig. 2, 3, pg. 3*).

Technical Specifications:


Parameter	Description
Connections	RJ45 for CAT5/6 or higher ethernet link. UTP (2-wire) screw terminals to interconnect receiver/transceiver
Input Power Pace1KR	Midspan or endspan port connected to first Pace1KR. PoE compliant to IEEE 802.3af (15W) and PoE+ compliant to IEEE 802.3at (25W)
PoE Output Power Pace2KT	PoE outputs (2) .3at (25W each). Total not to exceed 25W.
Indicators	Yellow (RJ45 connector): On - Link, Off - No Link, Blinking - Activity. Green (RJ45 connector): On - 100Base-TX, Off - 10Base-T. Green Link LEDs: Link active
Environmental Conditions	Operating Ambient Temperature: UL60950-1 Pace1KR: – 20°C to 49°C (– 4°F to 120.2°F). Pace2KT: For 15W: – 40°C to 75°C (– 40°F to 167°F). For 25W: – 40°C to 49°C (– 40°F to 120°F). Storage Temperature: – 40°C to 75°C (– 40°F to 167°F). Relative Humidity: 20 to 85%, non-condensing. Operating Altitude: – 304.8 to 2,000m.
Regulatory Compliance	CE European Conformity.
Weights (approx.)	Product: 0.4 lb. (0.18 kg) Shipping: 1 lb. (0.45 kg).

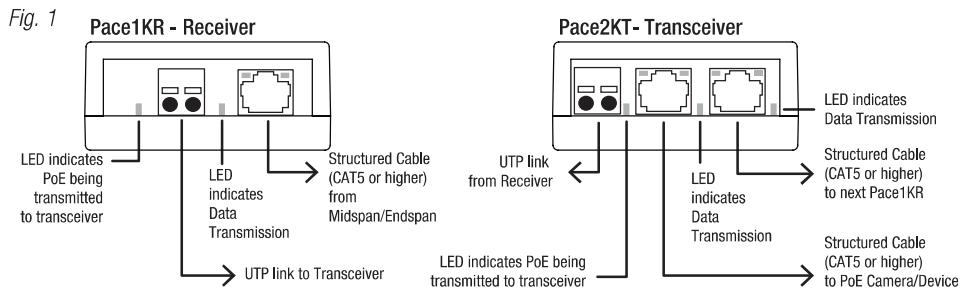

Single Pace2KRT PoE Camera Connection:

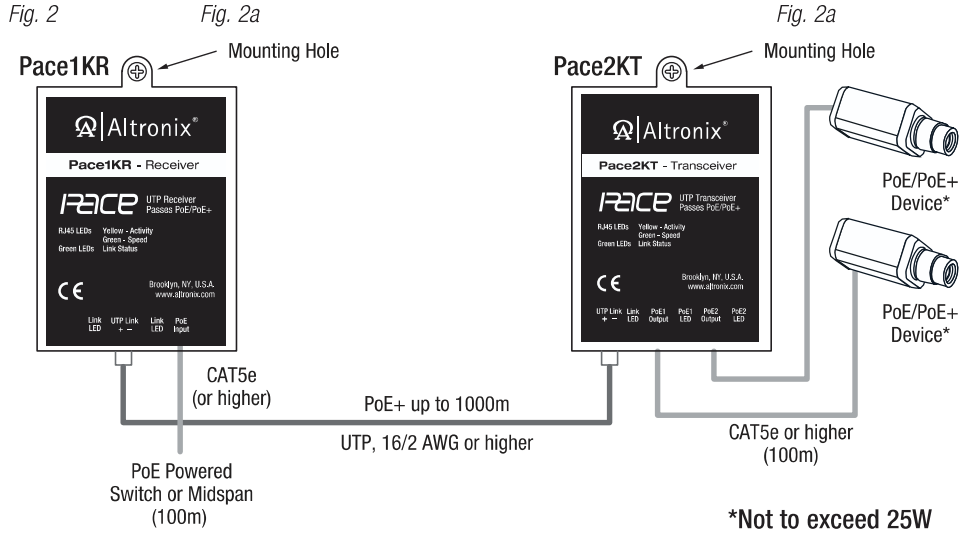

PoE Camera and Next Pace2KRT Connection:

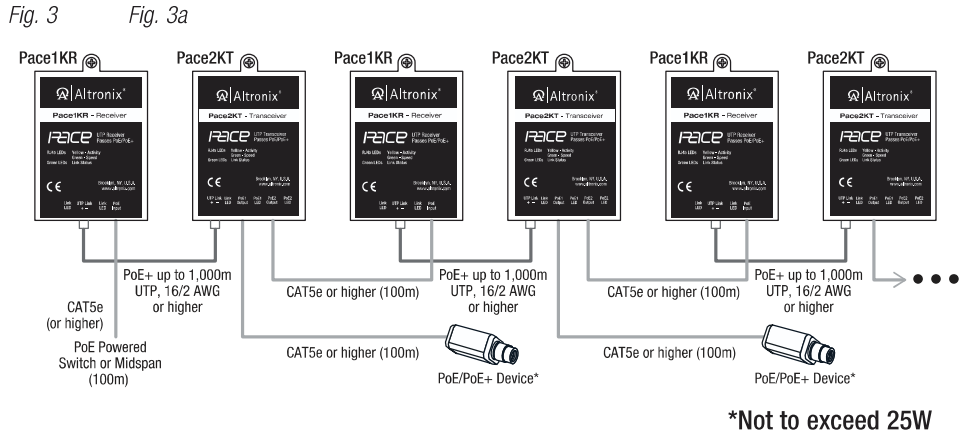

Maximum Length of Cable Type vs. Total Power Consumption:

Wire type	Total Power Consumption	Max. Data Distance	Max. Power Distance
18 AWG (2-wire, UTP)	7.5W	1,000m (3280 ft)	1,996m (6,548ft.)
	15W	1,000m (3280 ft)	998m (3274 Ft.)
	30W	1,000m (3280 ft)	269m (882 ft)
16 AWG (2-wire, UTP)	7.5W	1,000m (3280 ft)	3,169m (10,396 ft.)
	15W	1,000m (3280 ft)	1,584m (5,196 ft.)
	30W	1,000m (3280 ft)	427m (1,400 ft.)

Note: Calculations based on 56VDC starting voltage from power source and accounts for a 10VDC voltage drop.
IEEE standards voltage range requirement for powered devices are:
PoE (15W) - 37VDC to 57VDC, PoE+ (30W) - 44VDC to 57VDC).

Altronix is not responsible for any typographical errors.

140 58th Street, Brooklyn, New York 11220 USA | phone: 718-567-8181 | fax: 718-567-9056
website: www.altronix.com | e-mail: info@altronix.com | Lifetime Warranty
II Pace2KRT Rev. 090523 D03X

