


PD4ULCB

UL Listed Power Distribution Module

Altronix PD4ULCB UL Listed Sub-Assembly power distribution module is designed to convert a single AC or DC input into four (4) PTC protected Class 2 Rated power-limited outputs.

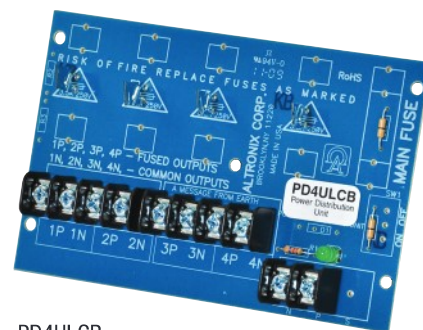

PD4ULCB

Specifications

Input

Voltage Range 12VDC or 24VDC, up to 10A or
24VAC or 28VAC, up to 12A

Outputs

Four (4) PTC protected Class 2 Rated power-limited outputs
(auto-resettable)
2A per output max.
Total output current should not exceed max current rating of
power supply employed
PTCs are rated @ 2A/250V

Indicators (LED)

DC Output Power LED

Agency Listings

UL:

UL294 Access Control
UL603 Burglar Alarm
UL1481 Fire Alarm

cUL:

General Signaling Equipment Evaluated to
CSA Standard C22.2 No.205-M1983
Power Supplies for Burglar Alarm Systems ULC-5318-96

Physical and Environmental

Dimensions (L x W x H)

5.25" x 3.25" x 1" (133.4mm x 82.6mm x 25.4mm)

Product Weight 0.15 lb. (0.07 kg)

Shipping Weight 0.25 lb. (0.11 kg)

Temperature

Operating 0°C to 49°C (32°F to 120°F)

Storage -20°C to 70°C (-4°F to 158°F)


Relative Humidity 85% +/-5%

Mounting hardware included

Lifetime Warranty

Board Dimensions (L x W x H) and Drawing

5.25" x 3.25" x 1" (133.4mm x 82.6mm x 25.4mm)

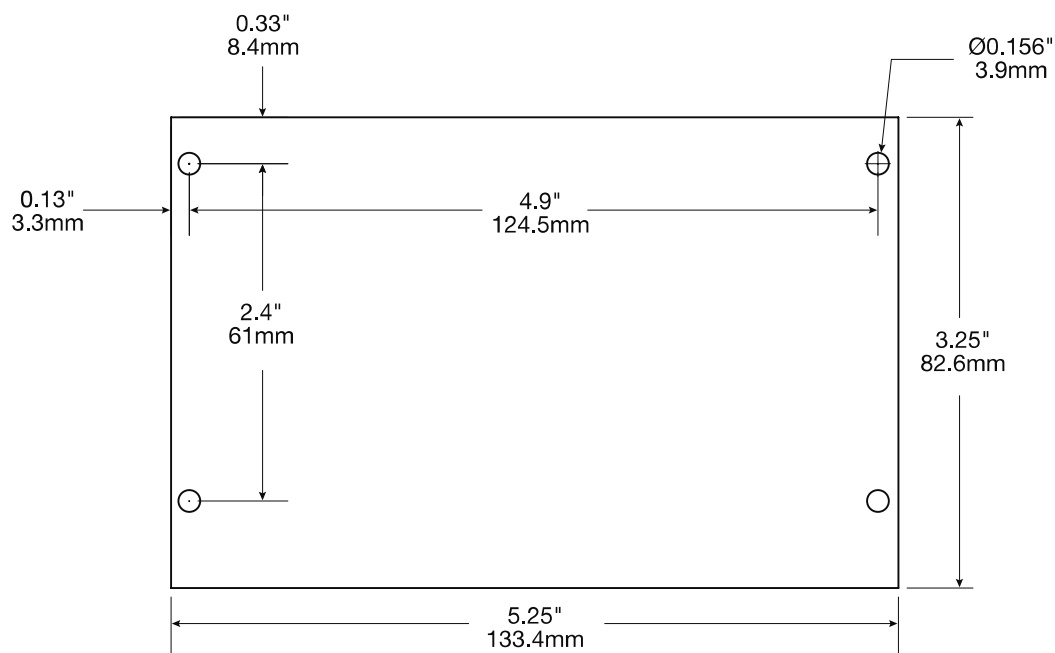**Lifetime Warranty**

Altronix Corporation | 140 58th St | Brooklyn, NY 11220 USA

phone: +1 718.567.8181 | fax: +1 718.567.9056 | email: info@altronix.com | www.altronix.com