

T2PDK75F16S (Kit)

Access & Power Integration Solution for PDK Red™

TROVE™

Altronix T2PDK75F16S kit consists of Trove2 enclosure, TPD2 PDK Red™/Altronix backplane with one (1) 24VDC @ 10A, one (1) 12VDC @ 10A power supply/charger, two (2) eight (8) fuse protected dual input/output access control modules, one (1) 12VDC voltage regulator and one (1) eight (8) fuse protected power distribution modules. This kit also accommodates up to four (4) PDK Red™ modules for up to sixteen (16) doors in a single enclosure. Trove simplifies board layout and wire management, reduces installation time and labor costs.

**T2PDK75F16S***PDK boards are not included***Key Features**

- 12VDC & 24VDC power supply/chargers
- Accommodates Pdk Red™ modules:
up to eight (8) red1, red2, or six (6) red4
- Convenient knockout configuration:
 - One (1) single knockout 2.415" (2" Conduit)
 - Sixteen (16) double knockouts
1.362" (1" Conduit) / 1.115" (3/4" Conduit)
- Supervision
 - AC Fail
 - Low Battery and Battery Presence
 - Low power shutdown
- Agency Listings:
 - All Altronix components of this Trove kit are UL Listed sub-assemblies. Please refer to the Sub-Assembly Installation Guides for further information
 - UL: UL294 - Access Control System
 - cUL: CAN/ULC - s319-05 - Electronic Access Control Systems
 - CE European Conformity
- 16 gauge galvanized steel backplane simplifies board layout and wire management
- Enclosure accommodates up to four (4) 12VDC/12AH batteries
- Lifetime Warranty*

**Altronix Power Supply/Chargers and Sub-Assemblies only*

Specifications

Power Supply/Charger 1 (eFlow104NB):

Input

Voltage	120VAC, 60Hz, 4.5A
Input Fuse	6.3A/250V

Output

Voltage	24VDC @ 10A.
Auxiliary	1A (unswitched)
Protection	Overvoltage protection. Filtered and regulated

Power Supply/Charger 2 (eFlow102NB):

Input

Voltage	120VAC, 60Hz, 3.5A
Input Fuse	5A/250V

Output

Voltage	12VDC @ 10A
Auxiliary	1A (unswitched).
Protection	Overvoltage protection. Filtered and regulated

Both Power Supplies:

Battery Charging

Capacity	12VDC/12AH (4 within enclosure) 40AH/65AH (requires separate enclosure)
Type	Sealed lead acid or gel type
Failover	Upon AC loss, instantaneous
Batteries are sold separately	

Fire Alarm Disconnect

Supervised	Latching or non-latching
EOL	10K Resistor

Supervision

AC Failure	Form "C" contacts
Battery	Form "C" contacts

Low DC Power Shutdown

Shuts down DC output terminals if battery voltage drops below 71-73% for 12V units and 70-75% for 24V units (depending on the power supply). Prevents deep battery discharge

Indicators (LED)

AC Input	120VAC is present
DC Output	Powered
Battery	Discharged or not connected

Voltage Regulator (VR6):

Input

Voltage	24VDC from eFlow104NB
---------	-----------------------

Output

Voltage	12VDC
Current	6A continuous
Other	Surge suppression

Indicators (LED)

Input	24VDC is present
Output	Powered

Power Distribution Module (PD8UL):

Input

Voltage	12VDC from eFlow104NB
---------	-----------------------

Outputs

Voltage	12VDC
Output Fuses	3.5A/250V

Indicators (LED)

Green LED	DC Output
-----------	-----------

Two (2) Dual Input Access Power Controllers (ACMS8):

Input

Voltage	24VDC from eFlow104NB and 12VDC from VR6
---------	---

Input Fuses

15A/32V

Outputs

Voltage 12 or 24VDC individually selectable

Eight (8) selectable 12VDC - 24VDC independently controlled outputs or eight (8) independently controlled Form "C" relay outputs:

- Fail-Safe and/or Fail-Secure power outputs
- Form "C" Relays. 28VAC or VDC @ 2.5A Rated
- Auxiliary power outputs (unswitched)
- Any combination of the above

Any of the eight (8) fuse protected power outputs are selectable to follow power Input 1 or Input 2

Individual outputs may be set to OFF position for servicing

Output Fuses 3A/32V

Indicators (LED)

Red LEDs	Outputs are triggered (relays energized)
Blue LED	FACP disconnect is triggered

Individual voltage LEDs:

Green:	12VDC
Red:	24VDC

T2PDK75F16S Kit:

Agency Listings

All components of this Trove kit are UL Listed sub-assemblies. Please refer to the corresponding Sub-Assembly Installation Guides for further information

CE European Conformity

Physical and Environmental

Dimensions (H x W x D)

Enclosure: 27.25" x 21.5" x 6.5" (692.2mm x 546.1mm x 165.1mm)

Shipping: 32.5" x 26.5" x 11.125" (826mm x 673mm x 283mm)

Weight (approx.)

Product	49.8 lb. (22.59 kg)
Shipping	53.55 lb. (24.29 kg)

Temperature

Operating	0°C to 49°C (32°F to 120°F)
Storage	- 20°C to 70°C (- 4°F to 158°F)

Relative Humidity

85% +/- 5%

BTU/Hr (approx.):

290 BTU/Hr.

Accessories (order separately)



WM5

WM5, WM25, WM100 - Magnetic Cable Tie Mounts

Altronix WM5, WM25, and WM100 are packs of 5, 25 or 100 magnetic cable tie mounts respectively. They accommodate standard zip ties or velcro straps. These are ideal for wire management in our Trove series.



Mounting Magnet

MM4, MM8, MM12, MM24 - Magnetic Mounting Solution

Altronix mounting magnets accommodate screws and nylon standoffs to allow for mounting various boards/ accessories in any metal enclosure or backplane.



BR1

BR1 - Sub-Assembly Mounting Bracket

Altronix BR1 mounting bracket is compatible with Altronix Maximal and Trove enclosures. It allows to mount one (1) PD4UL(CB), PD8UL(CB), ACM4(CB), MOM5, VR6, PDS8, NetWay5B or LINQ8PD(CB) sub-assembly on the enclosure's inside wall, saving valuable space.

Trove2BWC
with
batteries



Trove2BWC
with
wires




TROVE2BWC - Battery/Wire Trough Enclosure

Altronix Trove2BWC is a dual-purpose enclosure that can be used as wiring trough or battery cabinet when mounted above or below of the Trove2 integrated power and access solution. The knockouts on the Trove2BWC have been strategically placed to line up with the Trove2 allowing for easy conduit connections between cabinets. Trove2BWC includes cam locks and 2 tamper switches to ensure access to wiring and batteries is secure.

Access Controller Position Chart for the Following Models:

PDK	Pem Mounting
red1, red2, red4	(A)

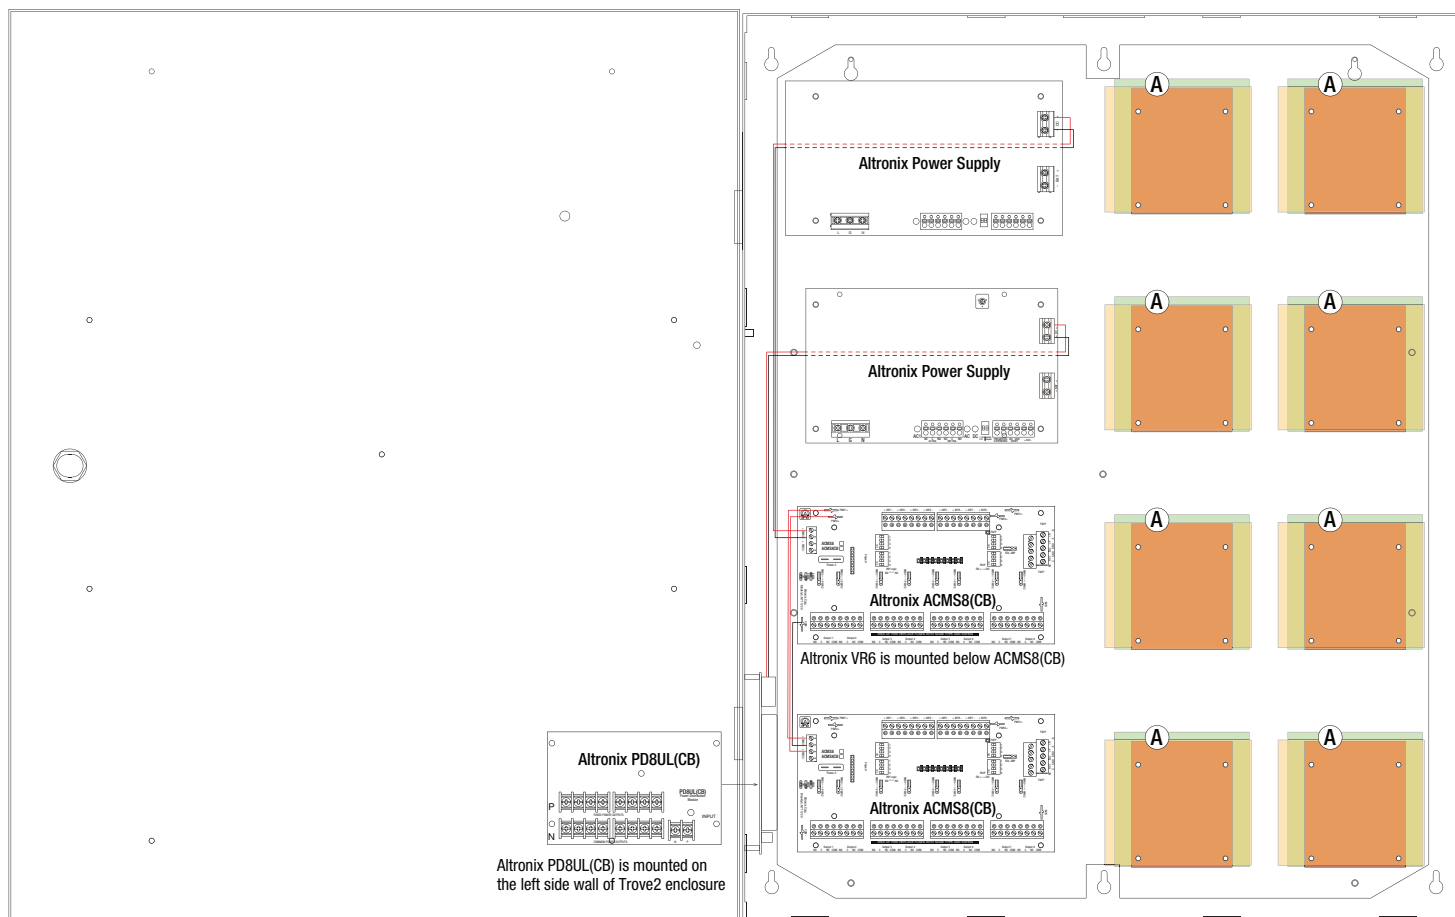

Dimensions and Drawing

Dimensions (H x W x D approximate)

27.25" x 21.5" x 6.5" (692.2mm x 546.1mm x 165.1mm)

