



DIGITAL KEYPADS

ACCESS CONTROL



1504 Surface Mount



1506, 1513, 1515
Flush Mount



1506, 1513, 1515
Surface Mount



1515 Compact
Surface Mount

STAND-ALONE (Relay Output) or 26-BIT WIEGAND OUTPUT or RS485 OUTPUT

- Rugged Steel Cabinet with Stainless Steel Faceplates and Metal Keypads
- For stand-alone operation, codes are programmable from the keypad or using the Android DK Manager app (1515 only)
- EEPROM Memory will not lose Programmed Codes during power outages
- 2-Year Limited Factory Warranty

SELF-STORAGE • APARTMENT COMPLEX/GATED
COMMUNITIES • RESIDENTIAL • PARKING • APARTMENT/
COLLEGE RESIDENTS HALLS • MIXED USE BUILDINGS •
COMMERCIAL/INDUSTRIAL • MAXIMUM SECURITY



Intercom Model
1504 can be used with some existing
intercom systems



Keypad Users
enter a unique PIN to gain entry



Lighted Keys
for easy night time operation




Android Smartphone
for manager programming and user
entry (1515 only)

ACCESS CONTROL SOLUTIONS




DIGITAL KEYPADS ACCESS CONTROL

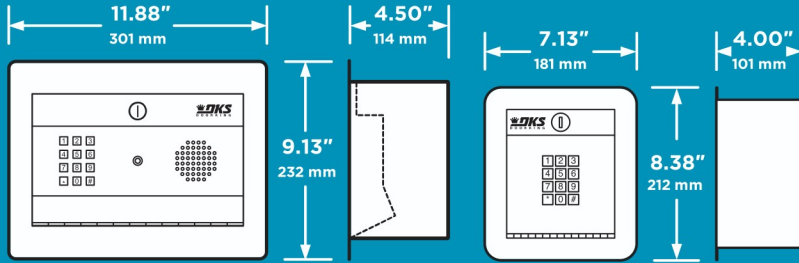


1504 Flush

1506, 1513, 1515 Flush

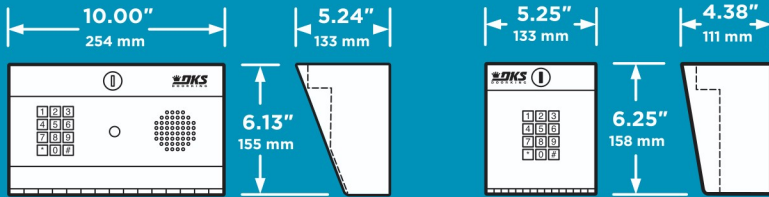

1504 Surface

1506, 1513, 1515 Surface

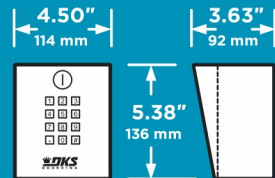

1515 Compact Surface

	1506	1515	1513	1815 Series
SOLAR POWER MODE	No	Yes	No	No
MAX CODES	6 (5-digit) 1000 (4-digit)	400 (4 or 5-digit)	N/A	N/A
OUTPUT	Two Form C Dry Contact Relays	One Form C Dry Contact Relay	RS-485	26-Bit Wiegand
TIME ZONES	2 Inputs	No	N/A	N/A
HOLD OPEN	Yes	No	N/A	N/A
WRONG CODE LOCKOUT	Yes	Yes	N/A	N/A
ANDROID APPS	No	Yes	N/A	N/A
REQUEST TO EXIT	No	Yes	Yes	No
INPUT POWER	16 VAC	12-24 VAC / VDC	12-24 VAC / VDC	12-24 VAC / VDC
OPERATING TEMPERATURE	-10°F to 140°F (-23°C to 60°C)	-10°F to 140°F (-23°C to 60°C)	-10°F to 140°F (-23°C to 60°C)	-10°F to 140°F (-23°C to 60°C)

TECHNICAL FEATURES

1504 - Keypad Combinations

1504 combines the 1506 or 1515 keypad with an intercom sub-station.

Keypad can be combined with a card reader for higher security requirements. 26-bit wiegand output only.

1515 Digital Keypads

400 Memory Capacity for Momentary Entry or Hold Open Entry Codes or any combination thereof

Selectable 4 or 5-Digit Codes

Low Power Mode for Solar Applications.

Door Open Time settable from 1/4 second to 99 seconds

Wrong Entry Code Lockout settable from 3-9 tries and 1-9 minutes

Programming via the keypad or DoorKing Android Digital Lock Manager App using Near Field Communication (NFC)

DoorKing Smart Open App for users to activate the Entry Codes using their Android NFC Smartphone

1506 Digital Keypads

1000 4-Digit Codes

Six 5-Digit Codes

Add or delete individual codes from the Keypad

Time Zone Inputs

Secondary Keypad capability

ELECTRICAL

1506 Digital Keypads

16 VAC

Two form C dry contact relays; 30V 1A contacts

1515 Digital Keypads

12-24 VAC / VDC

One form C dry contact relay; 30V 1A contacts

Request to Exit Input

1513 Digital Keypads

12-24 VAC / VDC

RS-485 output

1815 Series Digital Keypad

12-24 VAC / VDC

26-Bit Wiegand output

MISCELLANEOUS

Environmental: -10°F to 140°F (-23°C to 60°C)

Shipping weight approximately 8-20 lb (3.6-9 kg)

Mounting: Surface / Post Mount Flush mount

DoorKing® Inc.

Access Control Solutions since 1948



120 S. Glasgow Avenue,
Inglewood, California 90301 U.S.A.
Tel: 310-645-0023 FAX: 310-641-1586
www.doorking.com

© 2021 All Rights Reserved.
Product specifications may
change without notice. Rev. 5/21

MEMBER:



DISTRIBUTED BY:

