


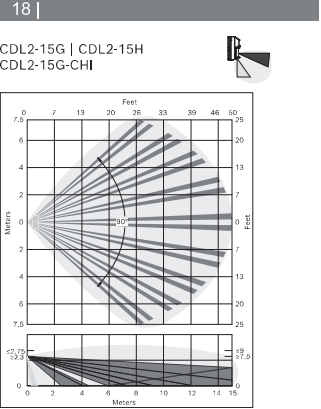
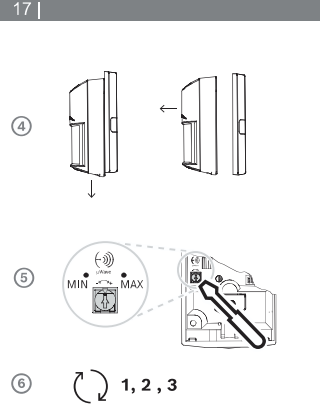
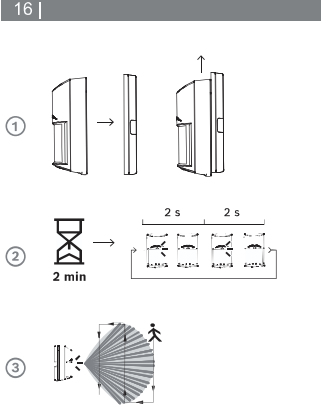
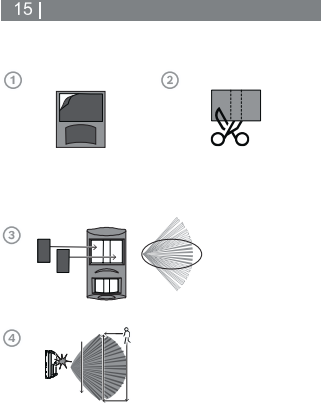
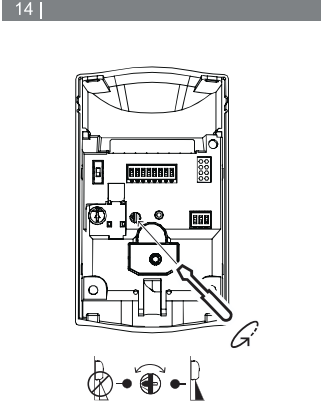
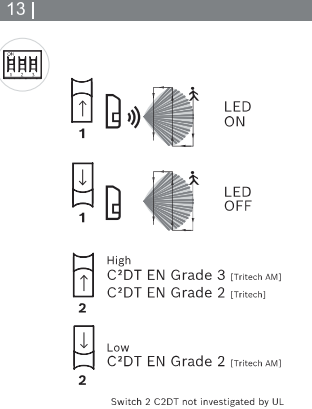
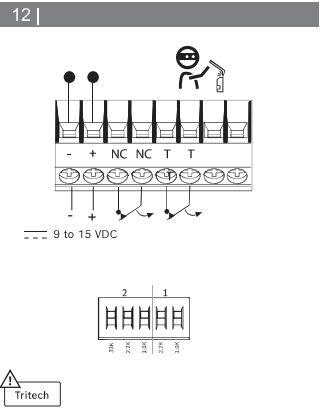
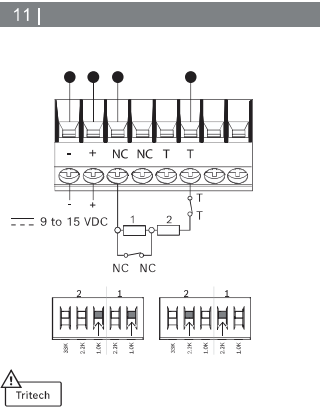
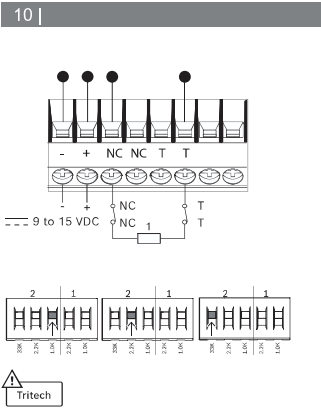
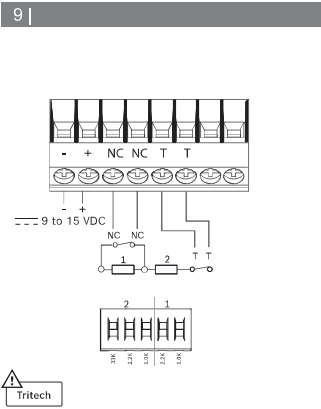
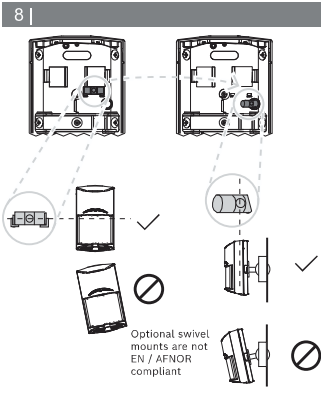
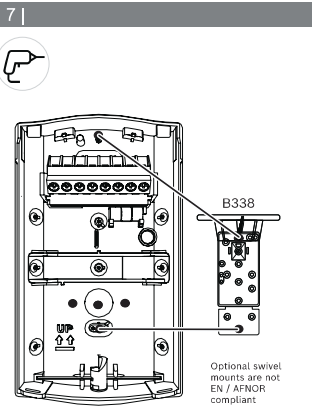
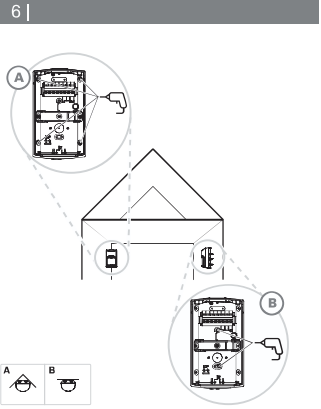
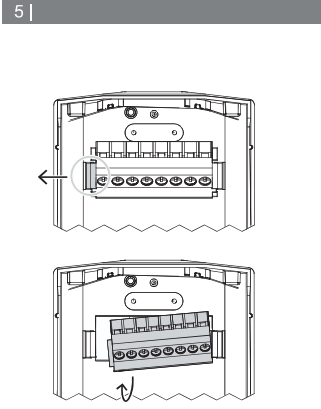
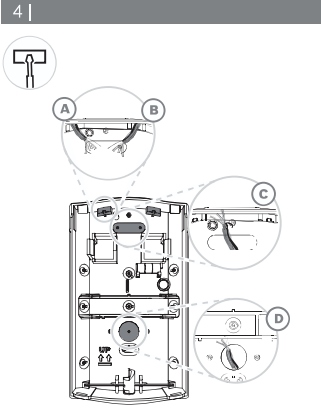


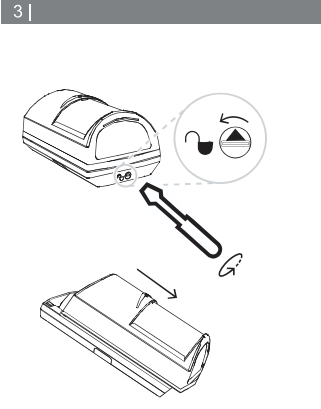

AT	DK	HU	LV	RU
BE	EE	IE	MT	SE
BG	EL	IS	NL	SI
CH	ES	IT	NO	SK
CY	FI	LI	PL	TR
CZ	FR	LT	PT	UA
DE	HR	LU	RO	UK

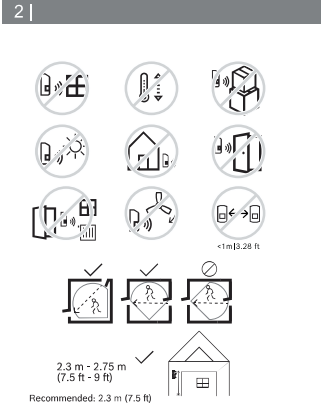

AT	DK	HU	LV	RU
BE	EE	IE	MT	SE
BG	EL	IS	NL	SI
CH	ES	IT	NO	SK
CY	FI	LI	PL	TR
CZ	FR	LT	PT	UA
DE	HR	LU	RO	UK

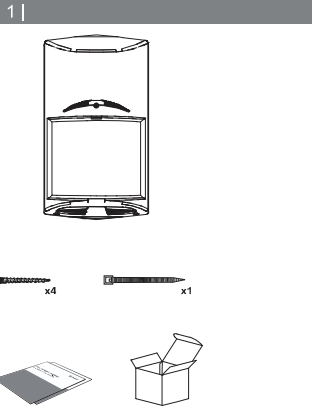

Manufacturing dates
For product manufacturing dates, go to <http://www.boschsecurity.com/datecodes/> and refer to the serial number located on the product label.



Changes or modifications not expressly approved by Bosch Security Systems B.V. can void the user's authority to operate the equipment.

cUL / us	Perform Walk Test at least once a year. Use only a Listed Class 2 Power Limited power source.Standby power: The Listed control unit or a listed burglary power supply must provide 4 hours of standby power. Install the unit in accordance with National Electrical Code NFPA 70 and Part 1 of the Canadian Electrical code CSA C22.1.
----------	---

FCC / ISED	This device complies with part 15 of the FCC Rules and Industry Canada license-exempt RSS standard(s). Operation is subject to the following two conditions: (1) this device may not cause interference, and (2) this device must accept any interference, including interference that may cause undesired operation of the device Le présent appareil est conforme aux CNR d'Industrie Canada applicables aux appareils radio exempts de licence. L'exploitation est autorisée aux deux conditions suivantes : 1) l'appareil ne doit pas produire de brouillage, et (2) l'utilisateur de l'appareil doit accepter tout brouillage radioélectrique subi, même si le brouillage est susceptible d'en compromettre le fonctionnement.
------------	--

Voltage (operating)	9 to 15 VDC, 9-15 Vcc de 16 mA @ 12 Vcc en veille/en alarme, source limitée en puissance, ondulation résiduelle 1 V.
Current (max)	16 mA
Alarm relay	<35 mA, 25 V
Wiring loops	Ø 1.29 mm to 0.40 mm (16 AWG to 26 AWG) (UL: 22 AWG to 16 AWG)
	-20 °C - +55 °C (-4 °F - +131 °F) EN 50130-5 Class II: -10 °C - +55 °C (+14 °F - +131 °F) UL/ C-UL: 0 °C - +49 °C (+32 °F - +120 °F)
	0- 93% Relative humidity non-condensing

Dimensions	120 mm x 70 mm x 55 mm (4.7 in x 2.75 in x 2.2 in)
Weight	116 g (4.05 oz)

Commercial Series Gen 2
Non-Anti-mask
CDL2-15G | CDL2-15H | CDL2-15G-CHI



en Quick installation guide

Region	Agency	Certification
USA and CA		cULus UL 639, ULC S306-03, Intrusion Detection Unit, Type S (CDL2-15G)
		FCC ID: T3X-CDL2, Part 15 Subpart B and C (CDL2-15G)
	ISED	IC ID: 1249A-CDL2, RSS-210, (CDL2-15G)

EU		CE - 2014/53/EU (RED), 2011/65/EU and 2015/863 (RoHS) (CDL2-15G, CDL2-15H)
	VdS	EN 50131-2-4 Grade 2 (CDL2-15G, CDL2-15H) EN 50130-5, Environmental Class II EN60529, EN62262: IP41 / IK04

FR	CNPP	 AFNOR-NF&A2P CDL2-15H : EN50131-2-4 Grade 2, NF324-H58 + RTC 50131-2-4 Certificate # 2820200014 NF (AFNOR) www.marque-nf.com , A2P (CNPP): www.cnpp.com Autosurveillance à l'ouverture Immunité champ magnétique. Test sans masque de vision vertical et sans immunité aux animaux
----	------	---

AUS	ACMA	RCM
BR	ANATEL	ANATEL: 03722-24-02045 Este equipamento não tem direito à proteção contra interferência prejudicial e não pode causar interferência em sistemas devidamente autorizados
BE	ANPI	INCERT B-B09-1010
SE	SBSC	CDL2-15G : No23-280, SSF 1014, utgåva 6
UK		 CDL2-15H
CN	CSP	CSP2022031901000023 (CDL2-15G-CHI)