

Siren & Chime ISZW7-ECO




Easy to enroll and designed to blend in, Ecolink's Siren is a powerful addition to any security system

The ISZW-ECO Siren is ready to mount and designed to easily fit in a standard ungrounded AC outlet. Customize which alerts the siren will sound from any of the 30 built in sounds (siren, chime, and alarm options) or easily add your own sounds via an microSD card. Ecolink's Siren is powerfully loud at a deafening 105 decibels.

Delivering true plug-and-play installation, simply plug the Siren into the wall receptacle, and the device will go into SmartStart inclusion mode. While in this mode, the sensor can be added to a Z-Wave™ controller that supports SmartStart. Its sleek design makes it a great addition to any home alarm system as it seamlessly integrates with almost any décor.

Z-Wave® communications

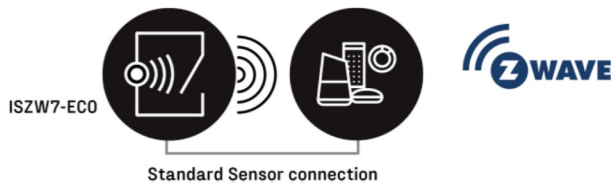

Product USPs



Wireless Connectivity



Innovative Sensing



Simple installation

Features

Siren Features

- 30* Built-in Sounds (siren, chime, and alarm options)
- Add custom sounds via micro SD
- Create automation with 30 selected sirens and chimes
- Powerfully loud at 105dB
- Volume Control (+/-)
- Learn-In Button
- Dual LED indicator (green and red)
- Self-recharging backup battery
- 24-hour battery back-up
- Modern design
- Easily pair to your gateway • Z-Wave Plus V2
- S2 Security Encryption
- Smart-Start Inclusion Supported Supports Wireless Updates
- UL/ETL Compliant*

Confirm security panel compatibility with the security panel/hub provider

Compatible with / recommended products:



DW-ZWAVE2.5-ECO
Door / Window Sensor



FF-ZWAVE5-ECO
Firefighter



FLF-ZWAVE5-ECO
Flood / Freeze Sensor



TBZ500
Z-Wave® Thermostat

Specifications

Model

- Commercial name: ISZW7-ECO
- Product Dimensions CM (LxWxH): 5.72x8.26x11.59
- Product Dimensions INCH (LxWxH): 2.25x3.25x4.56

Usability features

- Platform: Z-Wave Plus™
- RF Range (LoS): up to 600 feet
- Number of LEDs: 2
- LED color: Red / Green

Technical specifications

- Frequency: 908.4MHz
- Software Compatibility: Honeywell, 2GIG receivers
- Operating temperature: 0-49 °C
- Operating temperature: 32-120 °F
- Alarm decibels: 105 dB
- Indoor Application

Power

- Power Supply: Line powered 120 VAC 60 Hz, 0.25A Maximum US
- Battery Life Expectancy: 24 months

Compatible panels

- Compatible Panels: Honeywell Lynx Touch 5200, Honeywell Lynx Touch 7000, Honeywell Vista 20P+VAM, Honeywell Vista 128BPT, Honeywell Tuxedo Touch, Qolsys IQ/IQ2, 2GIG Edge, 2GIG GC2e, 2GIG GC3e, 2GIG GC2, 2GIG GC3, Interlogix Simon XT/XTi5, Samsung SmartThings Hub, Ezlo Vera Smart Hub, Alula Connect+

Warranty

- Warranty Period: 24 months

Compliances

- RF Regulation: ETL Listed for UL 2017, CSA STD C22.2 No. 205

Honeywell

2GIG vera
(an ezlo company)

interlogix
Smart Technologies

Works with
SmartThings
Professional smart device

Qolsys
QUALITY OF LIFE

Ecolink
intelligent technology

Visit our website:

www.discoverecolink.com