

iDS-9632NXI-M8/X AcuSeek NVR

Key Feature

- Up to 2-ch@32 MP/2-ch@24 MP/4-ch@12 MP/8-ch@8 MP/16-ch@4 MP/32-ch@1080p decoding (display) capacity
- H.265+/H.265/H.264+/H.264 video formats
- Up to 32-ch IP cameras can be connected
- Intelligent analytics based on deep learning algorithm
- Up to 24-ch perimeter protection
- Up to 16-ch facial recognition for video stream, or up to 32-ch facial recognition for face picture
- Up to 12-ch video structuralization



Profession and Reliability

- H.265+ compression effectively reduces the storage space by up to 75%
- Dual-stream recording saves bandwidth
- Adopt stream over TLS encryption technology which provides more secure stream transmission service
- Support double verification for playback and downloading
- ANR (Automatic Network Replenishment) technology ensures network camera video storage reliability

HD Video Output

- Provide independent HDMI and VGA outputs
- HDMI video output at up to 8K resolution or dual 4K resolution

Storage and Playback

- Up to 8 SATA interfaces for HDD connection
- Up to 16-ch synchronous playback

Smart & POS Function

- Support multiple VCA (Video Content Analytics) events
- Configurable special camera smart functions, such as VCA detection (motion, line crossing, intrusion, etc.), heat map, ANPR (Automatic Number-Plate Recognition), and people counting
- POS information overlay on live view and playback, and POS triggered recording and alarm


Network & Ethernet Access

- 2 self-adaptive 10M/100M/1000M Ethernet interfaces
- Hik-Connect & DDNS (Dynamic Domain Name System) for easy network management
- Smooth streaming technology
- Support web access without plug-in


Typical Application

AcuSeek

① Using the AcuSeek function, users can input target characteristic descriptions to search for corresponding targets. Then system will return search results matching the description.

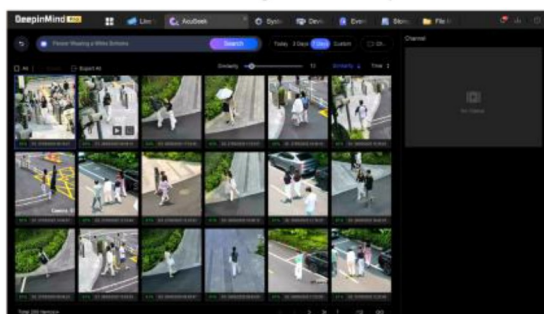


② Once the target is identified, use the AcuSearch function to retrieve all capture of the target across all channels and trace historical events.

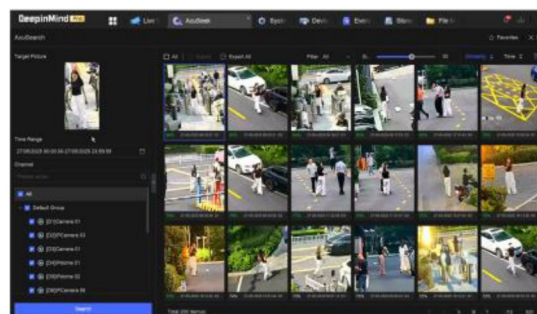


Facial Recognition and Face Picture Comparison

Modeling and analyzing face pictures captured by cameras. Realize list alarm and stranger alarm via face picture library. Search target people by picture and name features.

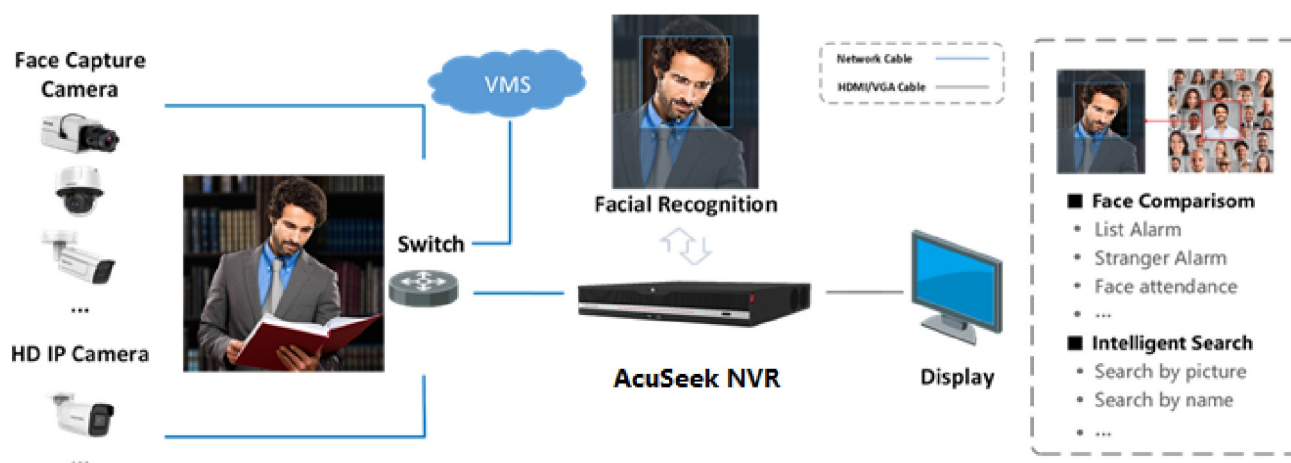

Perimeter Protection

Adopt deep learning algorithm to reduce false alarm, effectively reduces the false alarm caused by tree branches, leaves, shadow, light, vehicles, small animals, etc.

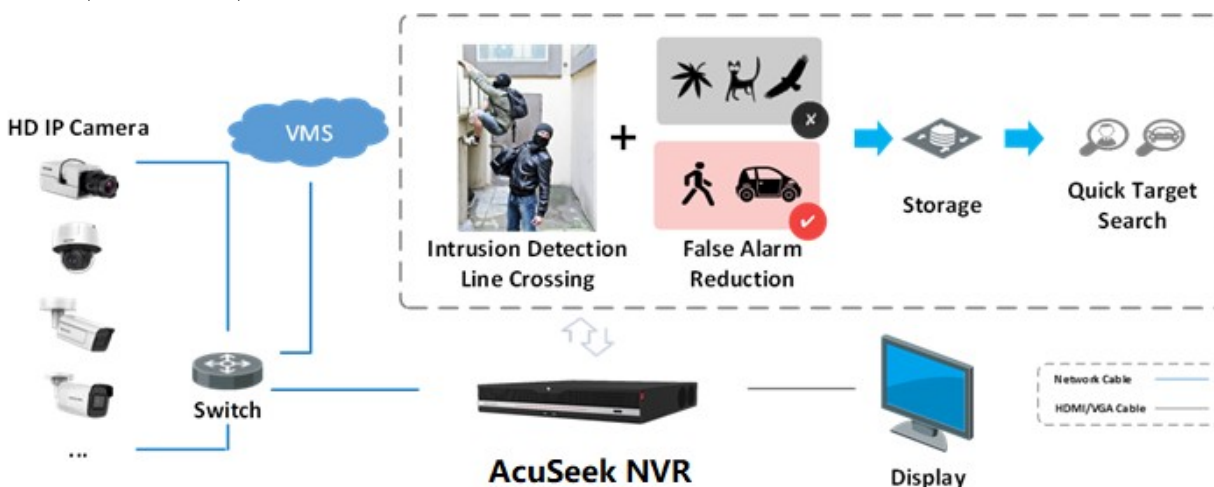

Video Structuralization (Attribute Search)

Extracts attributes of faces, human bodies, and vehicles from live video streams.

These attributes are structured for easy tracking and retrieval, enabling efficient search by features such as clothing color, vehicle type, etc.



▪ Specification


Intelligent Analytics	
AI by NVR	Facial recognition, perimeter protection, video structuralization, throwing objects from building
AI by Camera	Facial recognition, perimeter protection, video structuralization, throwing objects from building, motion detection2.0, ANPR, people counting, VCA
Engine	2, each engine can run an intelligent algorithm, engine mode is adjustable
Facial Recognition	
Facial Detection and Analytics	Face picture comparison, human face capture, face picture search
Face Picture Library	Up to 32 face picture libraries, up to 100,000 face pictures in list library, up to 10,000 face pictures in stranger library, up to 10,000,000 face pictures in face capture (each picture ≤ 4 MB, total capacity ≤ 20 GB)
Face Picture Comparison (with Face Capture Camera)	32-ch (16-ch for each engine); Comparison speed: 48 pictures per second
Face Picture Comparison (Captured by NVR)	4-ch 8 MP, 8-ch 4MP or 16-ch 2 MP (2-ch 8MP, 4-ch 4MP or 8-ch 2MP for each engine) Comparison speed: 48 pictures per second
AcuSeek (with FW version V5.05.230 and above)	
Performance	If the cameras support Hikvision AcuSense Technology and have enabled AcuSearch function, the NVR supports AcuSeek in all channels. For non-AcuSense functional cameras or 3rd party ONVIF cameras: 1 channel @8MP, 2 channels @4MP, 4-ch 2MP AcuSeek <i>(Note: The two engines need to set to AcuSeek and AcuSearch)</i>
Perimeter Protection	
By NVR	6-ch 8 MP, 12-ch 4MP or 24-ch 2 MP (3-ch 8MP, 6-ch 4MP or 12-ch 2MP for each engine)
By Camera	All channels
Video Structuralization	
Structured Analysis	2-ch 8 MP, 6-ch 4MP or 12-ch 2 MP (1-ch 8MP, 3-ch 4MP or 6-ch 2MP for each engine)
Face Picture Library	Up to 32 face picture libraries, up to 100,000 face pictures in list library, up to 10,000 face pictures in stranger library, up to 10,000,000 face pictures in face capture (each picture ≤ 4 MB, total capacity ≤ 20 GB)
Face Picture Comparison	16-ch; Comparison speed: 32 pictures per second

Throwing Objects from Building	
By NVR	4-ch 8 MP, 8-ch 4MP or 16-ch 2 MP (2-ch 8MP, 4-ch 4MP or 8-ch 2MP for each engine)
By Camera	All channels
ANPR	
By Camera	All channels
Vehicle Attributes	Vehicle brand, vehicle color, vehicle type
Plate Attributes	Plate number, license plate color, license plate type
Video and Audio	
IP Video Input	32-ch Up to 32 MP resolution *: After ultra HD resolution mode is enabled, the NVR supports up to 8-ch 32 MP/24 MP IP video inputs.
Incoming Bandwidth	320 Mbps
Outgoing Bandwidth	400 Mbps
HDMI 1 Output	8K (7680 × 4320)/30Hz, 4K (3840 × 2160)/60Hz, 4K (3840 × 2160)/30Hz, 2K (2560 × 1440)/60Hz, 1920 × 1080/60Hz, 1600 × 1200/60Hz, 1280 × 1024/60Hz, 1280 × 720/60Hz, 1024 × 768/60Hz
HDMI 2 Output	4K (3840 × 2160)/60Hz, 4K (3840 × 2160)/30Hz, 2K (2560 × 1440)/60Hz, 1920 × 1080/60Hz, 1600 × 1200/60Hz, 1280 × 1024/60Hz, 1280 × 720/60Hz, 1024 × 768/60Hz *: When HDMI 1 output resolution is 8K, the maximum HDMI 2 output resolution is 1080p.
VGA 1 Output	1920 × 1080/60Hz, 1280 × 1024/60Hz, 1280 × 720/60Hz, 1024 × 768/60Hz
VGA 2 Output	1920 × 1080/60Hz, 1280 × 1024/60Hz, 1280 × 720/60Hz, 1024 × 768/60Hz
Video Output Mode	HDMI1/VGA1 simultaneous output, HDMI2/VGA2 simultaneous output
CVBS Output	1-ch, BNC (1.0 Vp-p, 75 Ω), resolution: PAL: 704 × 576, NTSC: 704 × 480
Audio Output	2-ch, RCA (Linear, 1 KΩ)
Two-Way Audio	1-ch, RCA (2.0 Vp-p, 1 k Ω)
Decoding	
Decoding Format	H.265/H.265+/H.264/H.264+
Decoding Capability	2-ch@32 MP (30 fps)/2-ch@24 MP (30 fps)/4-ch@12 MP (20 fps)/8-ch@8 MP (25 fps)/16-ch@4 MP (30 fps)/32-ch@1080p (30 fps)
Synchronous Playback	16-ch


Recording Resolution	32 MP/24 MP/12 MP/8 MP/6 MP/5 MP/4 MP/3 MP/1080p/UXGA/720p/VGA /4CIF/DCIF/2CIF/CIF/QCIF *: After ultra HD resolution mode is enabled, the NVR supports up to 8-ch 32 MP/24 MP IP video inputs.
Network	
Remote Connection	128
Network Protocol	TCP/IP, DHCP, IPv4, IPv6, DNS, DDNS, NTP, RTSP, SADP, SMTP, SNMP, NFS, iSCSI, ISUP, UPnP™, HTTP, HTTPS
API	ONVIF (profile S/G); SDK; ISAPI
Compatible Browser	IE11, Chrome V57, Firefox V52, Safari V12, Edge V89, or above version
Network Interface	2, RJ-45 10/100/1000 Mbps self-adaptive Ethernet interface
RAID	
RAID Type	RAID0, RAID1, RAID5, RAID6, RAID10
Auxiliary Interface	
Ctrl 12V	Controllable 12 VDC, 1 A power output for external alarm device; The power will be turned on when the alarm output is triggered. *: The Ctrl 12V power is controlled by alarm output 9.
DC 12V	12 VDC, 1 A power output
SATA	8 SATA interfaces; 3.5-inch HDD
eSATA	1 eSATA interface
Capacity	Up to 16 TB capacity for each HDD
Serial Interface	1 RS-232, 1 RS-485 (full-duplex), 1 keyboard
USB Interface	Front panel: 2 × USB 2.0; Rear panel: 1 × USB 3.0
Alarm In/Out	16/9
General	
GUI Language	English, Russian, Bulgarian, Hungarian, Greek, German, Italian, Czech, Slovak, French, Polish, Dutch, Portuguese, Spanish, Romanian, Turkish, Japanese, Danish, Swedish Language, Norwegian, Finnish, Korean, Traditional Chinese, Thai, Estonian, Vietnamese, Croatian, Slovenian, Serbian, Latvian, Lithuanian, Uzbek, Kazakh, Arabic, Ukrainian, Kyrgyz , Brazilian Portuguese, Indonesian
Power Supply	100 to 240 VAC, 50 to 60 Hz
Consumption	≤ 50 W (without HDD)
Working Temperature	-10 to 55° C (14 to 131° F)
Working Humidity	10 to 90%
Dimension (W × D × H)	442 × 460 × 88 mm (17.4"× 18.1" × 3.5")
Weight	≤ 10 kg (without HDD, 28.7 lb.)

Certification	
Obtained Certification	CE, FCC, IC, CB, KC, UL, Rohs, Reach, WEEE, RCM, UKCA, LOA, BIS
FCC	Part 15 Subpart B, ANSI C63.4-2014
CE	EN 55032:2015+A1:2020, ENIEC61000-3-2:2019+A1:2021, EN 61000-3-3:2013+A1:2019, EN 50130-4:2011+A1:2014, EN 55035:2017+A11:2020

Dimension

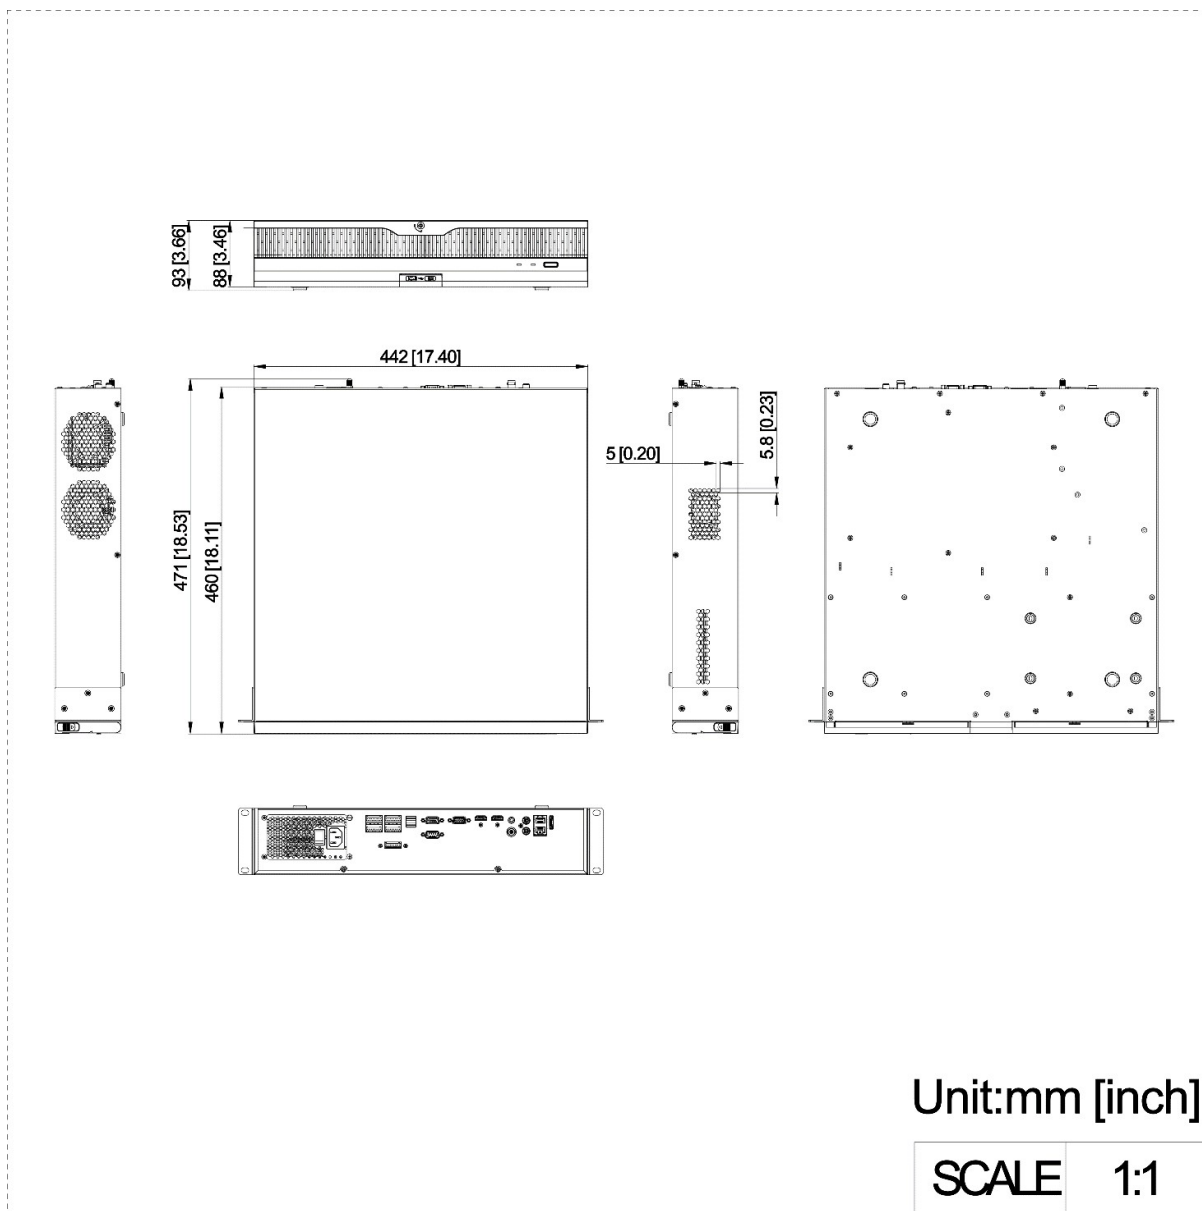

Physical Interface

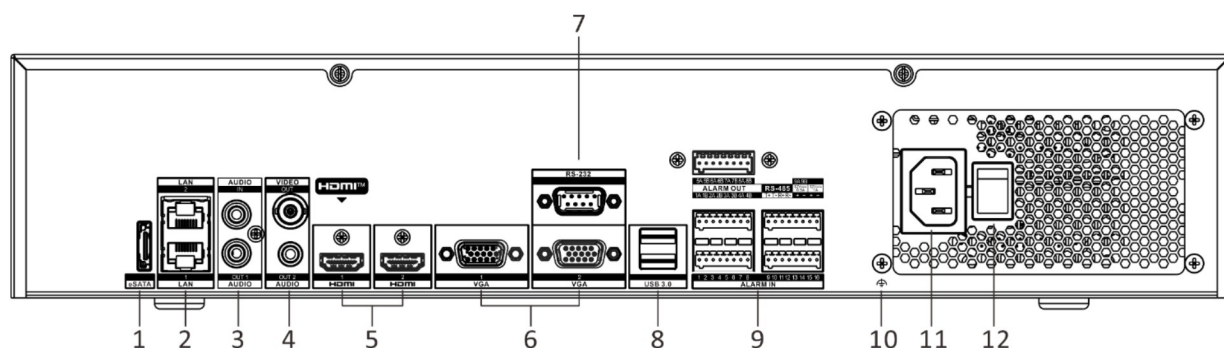

No.	Description	No.	Description
1	eSATA interface	7	RS-232 Serial interface
2	LAN interfaces	8	USB 3.0 interfaces
3	Audio in and out	9	Alarm in, alarm out, RS-485 serial interface, Ctrl 12V and DC 12V
4	Audio out and video out	10	GND
5	HDMI 1 and HDMI 2 interfaces	11	100 to 240 VAC power supply
6	VGA 1 and VGA 2 interfaces		

Available Model

iDS-9632NXI-M8/X

Headquarters

No.555 Qianmo Road, Binjiang District,
Hangzhou 310051, China
T +86-571-8807-5998
www.hikvision.com



Follow us on social media to get the latest product and solution information.



Hikvision



HikvisionHQ



HikvisionHQ



Hikvision_Global



Hikvision
Corporate Channel



hikvisionhq