


Fire Alarm Unshielded Cable Riser

-GENESIS-

Genesis Fire Alarm Cables ensure uninterrupted fire protection. Built to exceed the demands of rigorous fire safety codes and regulations, UL listed, and Made in the USA.

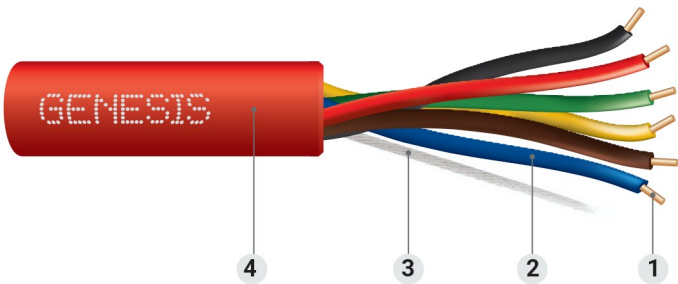

Construction

- 1. Conductor:** Bare Copper conductors for excellent conductivity and low voltage drop
- 2. Insulation:** Polypropylene
- 3. Rip Cord:** Durable rip cord for efficient jacket stripping and removal
- 4. Jacket:** PVC
Countdown® Length Markings for easy tracking of usage and remaining cable

Applications

Installed in a metal raceway that complies with 300.22(B)
Supported by solid bottom metal cable trays with solid metal covers
In risers
Within buildings in other than air-handling spaces and risers
Exposed to sunlight

Specifications

UL 1666 – Riser Rated
UL 444 – Communication Cables, Type CMR (22 AWG – 16 AWG)
UL 1424 – Cables for Power-Limited Fire-Alarm Circuits, Type FPLR
UL 13 – Power-Limited Circuit Cables, Type CL3R
Sunlight Resistant Rated
REACH/RoHS Compliant
Rated for 300 Volts
Rated for -20°C to 75°C

Conductor Color Codes: Fire Alarm Cable		
Conductor Number	Color	
1	Black	
2	Red	
3	Green	
4	Yellow	
5	Brown	
6	Blue	

Sample Print Legend

GENESIS P/N 43XX XC XXAWG E175105 (UL) FPLR OR CL3R OR CMR C(UL)US SUN RES 75C
(RoHS) W/O #XXXXXX-XXXXXX XXXX FT DEVICE/ZONE A B C D E F 1 2 3 4 5 6 7 8 9

Fire Alarm Unshielded Cable, Riser									
Part Number	Conductor Size (AWG)	Number of Conductors	Stranding	Insulation Thickness (in.)	Jacket Thickness (in.)	Nominal Diameter (in.)	DC Resistance (Ohms/1000 ft. at 20 °C)	Capacitance (pF/ft.)	Weight (lbs./1000ft.)
4301	22	4	Solid	0.006	0.015	0.117	18	18.8	11.3
4302	22	6	Solid	0.006	0.015	0.132	18	18.8	15.9
4306	18	2	Solid	0.006	0.015	0.134	6.52	22.8	14.1
4307	18	4	Solid	0.006	0.015	0.155	6.52	22.8	25.3
4308	18	6	Solid	0.006	0.017	0.180	6.52	22.8	37.1
4311	16	2	Solid	0.006	0.017	0.167	4.1	22.3	22.1
4312	16	4	Solid	0.006	0.018	0.197	4.1	22.3	40.2
4313	14	2	Solid	0.006	0.018	0.196	2.57	24.1	33.3
4314	14	4	Solid	0.006	0.020	0.233	2.57	24.1	62.0
4315	12	2	Solid	0.006	0.020	0.235	1.62	25.9	50.7
4320	12	2	65-strand	0.006	0.020	0.262	1.65	24.9	53.2

Genesis Cable
 7701 95th Street
 Pleasant Prairie, WI 53158
 Office: 800.222.0060
www.genescable.com



-GENESIS-