




Activation Quick Start Guide




1 Register and establish Telguard Online Account. Request to have ELK-TAP rate plan added to your account.



2 Register and establish ElkLink Account



3 Check cellular signal strength in proposed mounting location

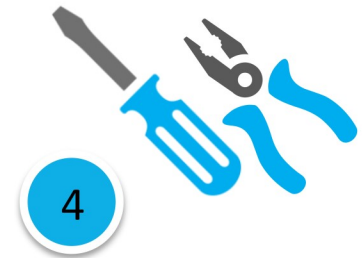

4 Physically mount C1M1, make all wiring connections and apply power



5 Activate C1M1 on Telguard Online Site using device serial or ICCID number



6 Activate C1M1 on ElkLink Site using device MAC address and PIN



7 Program M1 communications settings through ElkRP2



8 Test alarm signals through both cellular and IP pathways



For help or more info, contact us at (800)797-9355 or email techsupport@elkproducts.com