


OVER HEAD DOOR CLAMP-ON MAGNETIC CONTACT 1000-50SG SERIES




FEATURES:



- * 4" Long Magnetic Contact with Door Rail Clamp (Only One Screw to secure)
- * 72" Jacketed Leads. Also available with 18" and 36" Armored Cable
- * Epoxy sealed for maximum resistance to harsh environment
- * High Security Version with Biased Reed Available
- * Lifetime Warranty
- * Safety Approvals

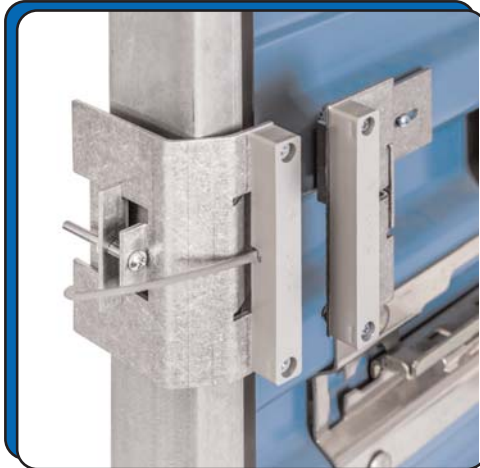

MAGNET

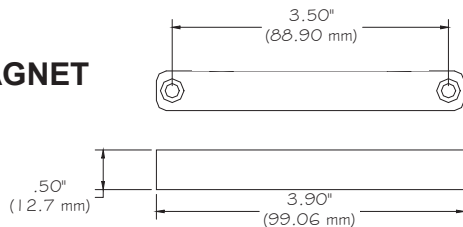

SWITCH

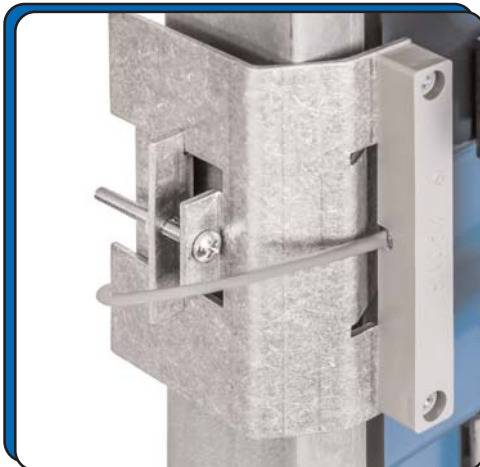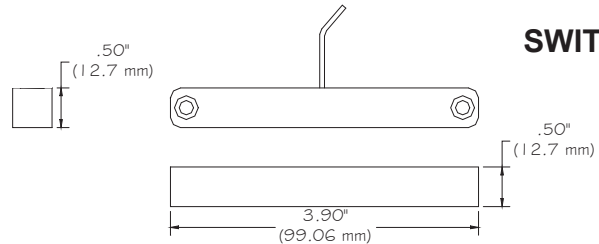

Switch bracket clamps to rail with just one screw. Maximum rail thickness is 2 1/4" with screw provided but can be longer with longer clamp screw.

Magnet bracket attaches to roll up sheet metal door or wood sectional door with two bolts or screws provided. Magnet height may be adjusted to be right next to switch - OPTIMAL.



Part Number	Loop Type	Electrical Configuration	Gap (Inch / mm)	Maximum Initial Contact Resistance (Ohm)	Maximum Contact Rating (W)	Maximum Switching Voltage (VDC/VAC)	Maximum Switching Current (A)
1000-50SG	Closed	N/O	3 (76.2)	.100	10	100	.500
1000-73SG	Open/Closed	SPDT	3 (76.2)	.100	3	30	.200
1000-50SBG	High Security	SPDT	3 (76.2)	.100	3	30	.200