



OVER HEAD DOOR CLAMP-ON MAGNETIC CONTACT 1000-50SG SERIES

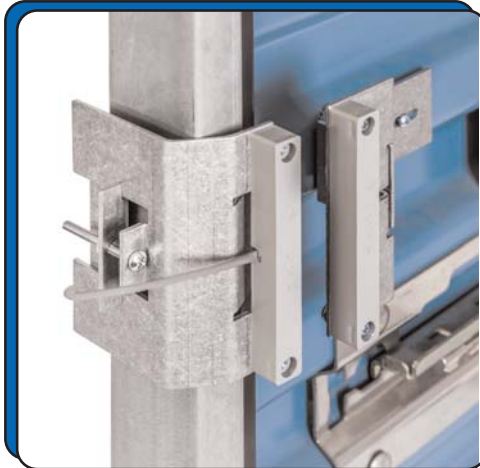

FEATURES:

- * 4" Long Magnetic Contact with Door Rail Clamp (Only One Screw to secure)
- * 72" Jacketed Leads. Also available with 18" and 36" Armored Cable
- * Epoxy sealed for maximum resistance to harsh environment
- * High Security Version with Biased Reed Available
- * Lifetime Warranty
- * Safety Approvals

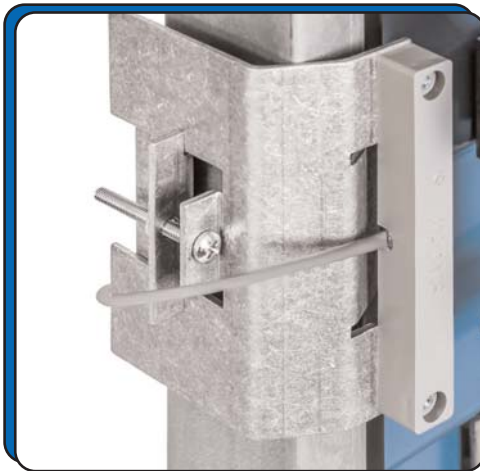

Switch bracket clamps to rail with just one screw. Maximum rail thickness is 2 1/4" for 1000-50SG and 4" for 1000-50SGX .

Magnet bracket attaches to roll up sheet metal door or wood sectional door with two bolts or screws provided. Magnet height may be adjusted to be right next to switch - OPTIMAL.



Armored Cable: -18 = 18" Armored Cable, -36 = 36" Armored Cable

Part Number	Loop Type	Electrical Configuration	Gap (Inch / mm)	Maximum Initial Contact Resistance (Ohm)	Maximum Contact Rating (W)	Maximum Switching Voltage (VDC/VAC)	Maximum Switching Current (A)
1000-50SG	Closed	N/O	3 (76.2)	.100	10	100	.500
1000-50SGX	Closed	N/O	3 (76.2)	.100	10	100	.500
1000-73SG	Open/Closed	SPDT	3 (76.2)	.100	3	30	.200
1000-73SGX	Open/Closed	SPDT	3 (76.2)	.100	3	30	.200
1000-50SBG	High Security	SPDT	3 (76.2)	.100	3	30	.200