



# RECESSED HIGH SECURITY TRIPLE BIASED ANSI CONTACT MSS2757-RAC

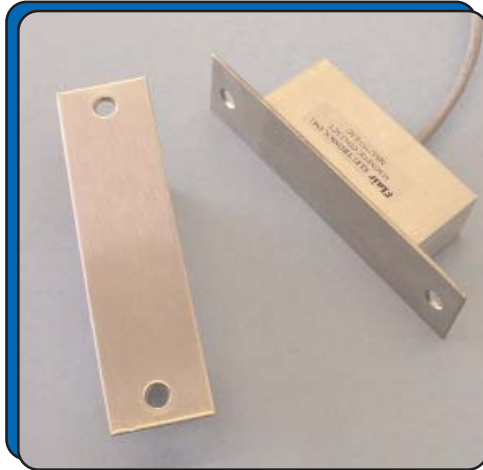

## FEATURES:

- \* Three Biased Reeds
- \* Gap 0" - 3/16"
- \* Rare Earth Magnets
- \* SPDT Configuration with Tamper Loop
- \* Listed UL 10C Fire Doors
- \* Attractive Grained Corrosion Resistant Stainless Steel ANSI Plate
- \* 12" #22 AWG Wire Leads
- \* Epoxy sealed switch for long life and maximum resistance to harsh environments

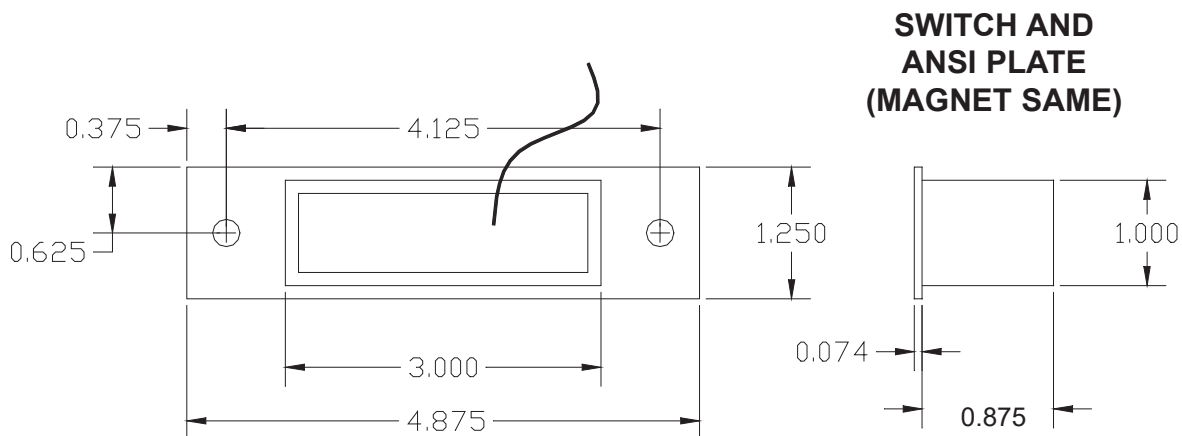

| Part Number | Loop Type   | Electrical Configuration | Gap (Inch) | Maximum Initial Contact Resistance (Ohm) | Maximum Contact Rating (W) | Maximum Switching Voltage (VDC/VAC) | Maximum Switching Current (A) |
|-------------|-------------|--------------------------|------------|------------------------------------------|----------------------------|-------------------------------------|-------------------------------|
| MSS2757-RAC | Open/Closed | SPDT                     | 0" - 3/16" | .100                                     | 3                          | 30                                  | .200                          |

## WIRING GUIDE: Magnet Present

SPDT CONTACT Common = Black  
Closed = White  
Open = Red

TAMPER LOOP Brown and Green