




PAR-P8BIR28-LC3

8 Megapixel IP Plug & Play, Outdoor Bullet, Fixed Lens, Supplemental Light Options: IR, White Light or IR to White Light on AI Trigger, Built-in Mic, SD Card Slot, 12VDC/PoE

Features

- First Level Human and Vehicle Classification
- Supplemental Light Options: IR, White Light, White Light Trigger
- Supports Native Chrome/Edge Use
- True P2P Connectivity with QR Code Connect NAT 2.0
- 8 Megapixel Resolution
- Fixed Lens
- H.265+, H.265, H.264+, H.264, MJPEG
- 20 FPS Recording and Live
- True WDR 120dB
- Micro SD Slot: Up to 256GB
- Audio Input: Built-in Mic
- IP67 Weatherproof
- 12VDC/PoE Operation
- ONVIF
- Free iOS & Android Apps for Smart Phones & Tablets
- Free Central Management Software(CMS) for PC/MAC
- NDAA Compliant

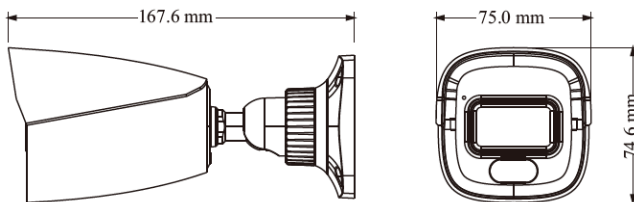

Camera	PAR-P8BIR28-LC3
Image Sensor	1 / 2.8 "CMOS
Image Size	3840×2160
Electronic Shutter	1 / 3s ~ 1 / 100000s
Iris Type	Fixed Iris
Min. Illumination	0.02 lux @F1.6, AGC ON; 0 lux with illumination on
Lens	2.8mm@F1.6, Horizontal FoV: 106°; Vertical FoV: 57°; Diagonal FoV: 124°
Focus	Fixed
Lens Mount	M12
Day&Night	ICR
Wide Dynamic Range	120dB
BLC	Yes
HLC	Yes
Digital NR	Yes
Defog	Yes
S/N Ratio	≥50dB
Angle Adjustment	Pan: 0°~360°; Tilt: 0°~80°; Rotation: 0°~360°
Image	
Video Compression	Main stream: H.265+ / H.265 / H.264+ / H.264 Sub / Third stream: H.265+ / H.265 / H.264+ / H.264 / MJPEG
H.265 Compression Standard	Main Profile@Leve4.1 High Tier
Resolution	8MP(3840×2160), 6MP(3200×1800), 4MP(2688×1520), 2K(2560×1440), 1080P(1920×1080), 720P(1280×720), D1, VGA(640×480), 640×360, 480×240, CIF
Main Stream	60Hz: 8MP(1~20fps) / 6MP/4MP/2K/1080P(1~30fps) 50Hz: 8MP(1~20fps) / 6MP/4MP/2K/1080P(1~25fps)
Sub Stream	720P/D1/VGA/640×360/CIF/480×240 (60Hz: 1~30fps; 50Hz: 1~25fps)
Third Stream	720P/D1/640×360/CIF (60Hz: 1~30fps; 50Hz: 1~25fps)
Bit Rate	64 Kbps ~12Mbps
Bit Rate Type	VBR / CBR
Image Settings	ROI, Saturation, Brightness, Hue, Contrast, Wide Dynamic, Sharpness, Image Mirror, Image Flip, NR, etc. adjustable through client software or web browser
Audio Compression	G711A/U
ROI	8ROI, Each ROI to be configured separately
Interfaces	
Network	RJ45
Video Output	No
Audio	1CH audio input; 1CH built-in MIC
Storage	Built-in micro SD card slot, up to 256GB
Reset	Yes
Functions	
Remote Monitoring	Web browser/ Paramount NVR / Paramount CMS AI / Paramount CMS APP
Web Browser	Chrome 89.0+/Edge 89.0+/Firefox 87.0+/Safari 14.0+
Online Connection	Support simultaneous monitoring for up to 10 users; Support multi-stream real time transmission
Network Protocol	UDP, IPv4, IPv6, DHCP, NTP, RTSP, RTP, RTCP, RTMP, PPPoE, DDNS, SMTP, FTP, 802.1x, SNMP, UPnP, HTTP, HTTPS, HTTP POST, P2P, QoS
Interface Protocol	ONVIF (Profile G/S/T/M)
Storage	Network remote storage; micro SD card storage Up to 256GB
Smart Alarm	Motion detection, SMD, SD card full, SD card error, IP address conflict, cable disconnection, video exception (scene change, video blur and abnormal color detection)
Smart Event	Line crossing /region intrusion detection(human/motor vehicle/non-motor vehicle classification), abandoned/missing object detection
General Function	Watermark, IP address filtering, video mask, heartbeat, smart supplement light, corridor pattern, image distortion correction, ANR, cloud upgrade
PoE	Yes (IEEE802.3af)
Supplement Light Range	IR range: 98'; white light range: 98'
Ingress Protection	IP67
Security	Video encryption, firmware encryption, configuration encryption, illegal login lock, IP address filtering, 802.1x authentication, basic and digest authentication for HTTP /RTSP
DORI Distance	
Lens	Detect (ft) Observe (ft) Recognize (ft) Identify (ft)
2.8mm	259 (79m) 105 (32m) 52 (16m) 27 (8m)
Others	
Power Supply	DC12V/PoE
Power Consumption	< 7W
Storage Conditions	-22°F ~ 149°F (-30 °C ~ 65°C), Humidity: less than 95 % (non-condensing)
Operating Conditions	-22°F ~ 140°F (-30 °C ~ 60 °C), Humidity: less than 95 % (non-condensing)
Dimensions	6.6 x 3 x 2.9" (167.6 x 75 x 74.6mm)
Weight (net)	Approx. .93 lbs (0.42KG)
Installation	Ceiling mounting; wall mounting
Certificate	CE, FCC
Environmental Protection	Complies with Directive EU RoHS, WEEE(2012/19/EU) , directive 94/62/EC and REACH(EC1907/2006)

Ordering Information

PAR-P8BIR28-LC3: 8 Megapixel Bullet, 2.8mm, White

PAR-P8BIR28B-LC3: 8 Megapixel Bullet, 2.8mm, Black

InVid Tech, reserves the right to make changes to improve our products at any time without notice; we are not responsible for misprints.