



VIS-P2ELEV2NH

2 Megapixel IP Plug & Play Low Profile, Wide Field of View, Fixed Lens, up to 32' IR Range, White Light Warning, Audio Input/Output, Built-in Mic/Speaker, SD Card Slot, 12VDC/PoE

Features

- Scooter, Moped, Bicycle Deterrence
- 2 Megapixel Resolution
- Fixed Lens
- True Day/Night with IR Range up to 32'
- Ultra H.265,H.265,H.264,MJPEG Compression
- 30 FPS Recording and Live
- True WDR 120dB
- Cloud Upgradeable
- Micro SD Slot: Up to 512GB
- Audio Input: Built-in Mic
- Audio Output
- IP67 Weatherproof
- 12VDC/PoE
- ONVIF
- Free iOS & Android Apps for Smart Phones & Tablets
- Free Central Management Software(CMS) for PC/MAC

Model	VIS-P2ELEV2NH
Camera	
Max Resolution	2 MP
Sensor	1/2.8" CMOS
Min. Illumination	Colour: 0.003 lux (F1.6, AGC ON) 0 lux with IR
Day/Night	IR-cut filter with auto switch (ICR)
Shutter	Auto/Manual, 1 ~ 1/100000s
Adjustment Angle	Tilt: 0° to 68°, Rotate: 3° to 360°
S/N	>52 dB
WDR	120 dB
Lens	
Focal Length	2.0 mm
Iris Type	Fixed
Iris	F1.6
Field of View (H)	126°
Field of View (V)	71.0°
Field of View (D)	144.6°
Lens Type	Fixed
DORI	
DORI Distance (Lens)	2.0 mm
DORI Distance (Detect)	101.8ft (31.0m)
DORI Distance (Observe)	40.7ft (12.4m)
DORI Distance (Recognize)	20.4ft (6.2m)
DORI Distance (Identify)	10.2ft (3.1m)



Illuminator	
Supplemental Light	IR
Illumination Distance (IR)	32.8 ft (10 m)
Wavelength	850 nm
IR On/Off Control	Auto/Manual
Video	
Video Compression	Ultra 265, H.265, H.264, MJPEG
H.264 Code Profile	Baseline profile, Main profile, High profile
Frame Rate	Main Stream: 2MP (1920*1080), Max 30fps; 720P (1280*720), Max 30fps Sub Stream: 720P (1280*720), Max 30fps; D1 (720*576), Max 30fps; 640*360, Max 30fps
Video Bit Rate	128 Kbps to 6144 Kbps
U-code	Support
OSD	Up to 6 OSDs (include two extra OSDs that only be used for Elevator Status Display)
Privacy Mask	Up to 4 areas
ROI	Support
Video Stream	Dual Streams
Image	
White Balance	Auto, Outdoor, Fine Tune, Sodium Lamp, Locked, Auto2
Digital Noise Reduction	2D/3D DNR
Smart IR	Support
Flip	Normal, Flip Vertical, Flip Horizontal, 180°, 90° Clockwise, 90° Anti-clockwise
Dewarping	N/A
HLC	Support
BLC	Support
Defog	Digital Defog
Image Stabilization	N/A
Intelligent	
Smart Intrusion Prevention	N/A
People Counting	N/A
Statistical Analysis	N/A
Elevator Entrance Detection	Support (Based on target classification: Motorcycle and Bicycle)
Events	
Basic Detection	Cross line (based on human body detection), Intrusion (based on human body detection), Motion Detection, Ultra Motion Detection, Audio Detection
Event for Elevator	TOF Tampering Detection, Elevator Status Display: Current Floor, Status: Stop/Down/Up/Speed, Temperature and Humidity detection
General Function	Watermark, IP Address Filtering, Access Policy, ARP Protection, RTSP Authentication, User Authentication, HTTP Authentication, Alarm Input, Alarm Output
Audio	
Audio Compression	G.711U, G.711A
Audio Bitrate	64 Kbps
Suppression	Support
Sampling Rate	8 kHz
Storage	
Edge Storage	Micro SD, up to 512 GB
Network Storage	ANR, NAS (NFS)
Network	
Protocols	IPv4, IPv6, IGMP, ICMP, ARP, TCP, UDP, DHCP, PPPoE, RTP, RTSP, RTCP, RTMP, DNS, DDNS, NTP, FTP, UPnP, HTTP, HTTPS, SMTP, 802.1x, SNMP, QoS, SSL/TLS, SSH
Compatible Integration	ONVIF (Profile S, Profile G, Profile T, Profile M), API, SDK
User/Host	Up to 32 users. 3 user levels: administrator, common user and operator
Security	Password Protection, Strong Password, HTTPS Encryption, Export Operation Logs, Basic and Digest Authentication for RTSP, Digest Authentication for HTTP, TLS 1.2, WSSE and Digest Authentication for ONVIF
Client	InVid Vision (Mobile App), Vision Tools (IP Utility), InVid CMS
Web Browser	Plug-in required live view: IE 10+, Chrome 45+, Firefox 52+, Edge 79+, Plug-in free live view: Chrome 57+, Firefox 58+, Edge 16+
Interface	

Ordering Information

VIS-P2ELEV2NH: 2 Megapixel Low Profile

Page 1 of 2 — continued on next page

Audio I/O	1 Input: impedance 35 k Ω , amplitude 2 V [p-p], 1 Output: impedance 600 Ω , amplitude 2 V [p-p]
Alarm I/O	1/1
Serial Port	N/A
Built-in Mic	Support
Built-in Speaker	Support
WiFi	N/A
Network	1 $\times$ RJ45 10 M/100 M Base-TX Ethernet
Video Output	N/A
Certification	
EMC	CE-EMC (EN 55032, EN 61000-3-3, EN IEC 61000-3-2, EN 50130) FCC (FCC 47 CFR part15 B)
Safety	CE LVD (EN 62368-1) UL/CUL (UL 62368-1, CAN/CSA C22.2 No. 62368-1)
Environment	CE-RoHS (2011/65/EU;(EU)2015/863); WEEE (2012/19/EU)
Protection	IP67 (IEC 60529)
General	
Power	DC 12V $\pm$ 25%, PoE (IEEE 802.3af)
Power Consumption	Max 5.5W
Power Interface	$\varnothing$ 5.5 mm coaxial power plug
Dimensions	$\varnothing$ 3.9" $\times$ 2.7" ($\varnothing$ 100.0 $\times$ 68.7mm)
Weight	.55lbs (0.25kg)
Material	Plastic
Working Environment	14°F $\sim$ 104°F (-10°C to 40°C), Humidity: $\leq$ 95% RH (non-condensing)
Storage Environment	14°F $\sim$ 104°F (-10°C to 40°C), Humidity: $\leq$ 95% RH (non-condensing)
Surge Protection	4 KV
Reset Button	Support
Web Client Language	13 Languages: English, Simplified Chinese, Polish, German, Russian, French, Korean, Dutch, Czech, Portuguese, Spanish, Spanish (Europe), Italian

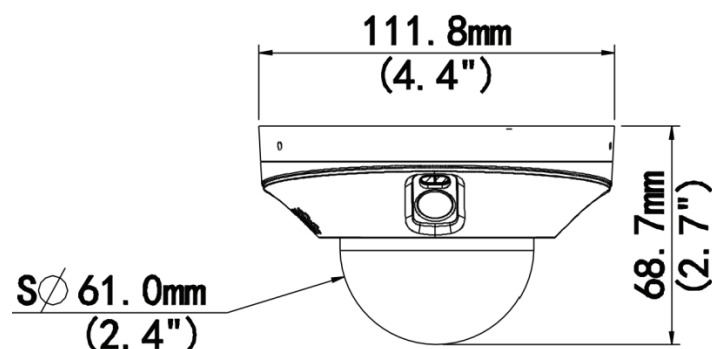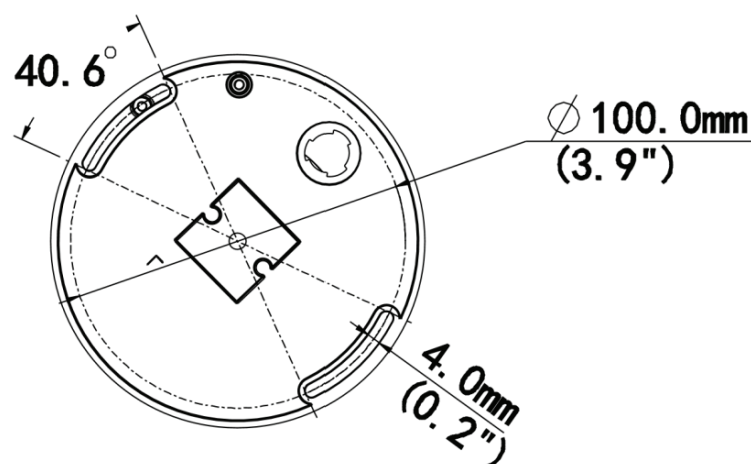

Ordering Information

VIS-P2ELEV2NH: 2 Megapixel Low Profile

InVid Tech, reserves the right to make changes to improve our products at any time without notice; we are not responsible for misprints.