

Vertical Finger-Duct Cable Manager

For Open-Frame Racks Installation Instructions

MODELS:
VF-04-200H & VF-04-240DH




Hardware Included:
2 Mounting Bracket Flanges
4 Rack Mounting Screws

Tools Required:
Phillips Screwdriver

1

Locate the slots for mounting bracket flanges along the cable manager base

Note: Arrows molded along the base only indicate this side up orientation.

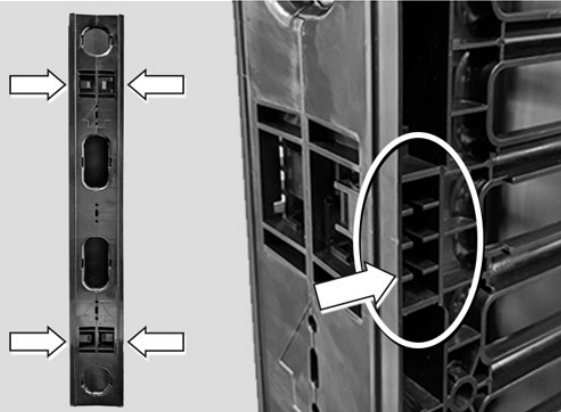

**Insert mounting bracket flanges into the slots;
Slide bracket in until it snaps-in securely**

Note: Mounting bracket flanges will only latch when inserted in the proper orientation. Brackets are attachable on both sides of the cable manager.

2

3

Attach the Vertical Cable Manager to the outside of the open-frame rack using a screwdriver and the rack mounting screws

Note: These Vertical Cable Managers only mount to open-frame racks. The position of the bracket flanges will determine whether the cable manager mounts on the left or right-side of the open frame rack. These Vertical Cable Managers are also stackable.

