

Introduction

Use the KT-2 adaptive metal plate to convert a KT-300 or KT-1 controller into a KT-2 controller.

- Note:** The KT-2 adaptive metal plate is available for use only in the United States and Canada.

The product box contains the following items:

- One adaptive metal plate (p/n D31000481)
- Two low-profile plastic standoffs
- One KT-2-M inner door label (p/n D18011307)

Installing the adaptive metal plate

To install the adaptive metal plate into a KT-1/KT-300 (D31-463/201/443 rev A/B/C) or into a KT-300 (D31000201 rev 0/1), complete the following steps:

1. Remove any components that are inside the cabinet.
2. If you are installing the metal plate into a KT-1/KT-300 (D31-463/201/443 rev A/B/C), remove the bottom two screws of the cabinet.
3. Unfasten the top two screws enough to loosen the cabinet.
4. Install the plastic standoffs on the metal plate. You require six standoffs for the controller and four standoffs for the KT-PS4085 power supply. These items are not included.
5. If you are installing the metal plate into a KT-1/KT-300 (D31-463/201/443 rev A/B/C), complete the steps:
 - a. Slide the metal plate from right to left into the cabinet.
 - b. Slide the top left and top right forks into the cabinet.
 - c. Install the top two screws. Do not tighten the screws.
 - d. Install the bottom two screws over the metal plate forks. Do not tighten the screws.
 - e. Align the plate to fit all four screws and tighten each screw.
6. If you are installing the metal plate into a KT-300 (D31000201 rev 0/1), complete the steps:
 - a. Install the two low-profile standoffs at the locations that are indicated by Callout A in Figure 2.
 - b. Remove the protective tape.
 - c. Align the top forks with the top two screws and tighten both.
 - d. Press the bottom of the plate firmly to make contact with the cabinet.
7. Install the controller and the KT-PS4085 power supply. Refer to the *KT-2 Two-Door Controller Installation Guide*, D29010592R002 or higher.

Attaching the KT-2 inner door label

1. Ensure that the label is in the correct orientation. Partially remove the protective film from the top of the label.
2. Align the top corners of the label over the existing label on the cabinet door.
3. Apply pressure on the top edge to ensure that the label sticks correctly.
4. Completely remove the protective film.
5. Smoothly apply the label from the top to the bottom.

Figure 1: Installing the metal plate into a KT-1/KT-300 (D31-463/201/443 rev A/B/C)

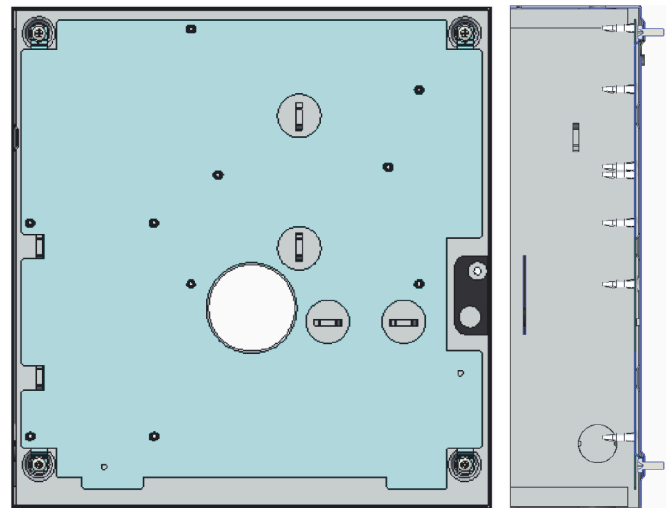


Figure 2: Installing the metal plate into a KT-300 (D31000201 rev 0/1)

