

Electromechanical Push Bars

SD-961B-36GQ Mechanical Push Bar

SD-961B-36GSQ Solenoid-Actuated Push Bar

ENFORCER Electromechanical Push Bars feature a double-locking spindle for stronger and more secure locking. All models include a cylinder lock for keyed entry and some models offer solenoid-actuation to allow unlocking and relocking by an access control device.

Features


- Double-locking spindle (stronger and more secure)
- Aluminum alloy construction, reversible, non-handed
- Fail-secure operation (but can be opened from inside by pressing the bar)
- Lock status monitoring for indicating status
- Mortise lock cylinder and keys included to release the lock from the outside
- Dogging latch on push bar to hold open
- Includes all needed hardware for typical installations

SD-961B-36GSQ Solenoid-Actuated Models

- Solenoid-actuation allows unlocking and relocking by an access device
- Solenoid is rated for both continuous and intermittent operation



Overview

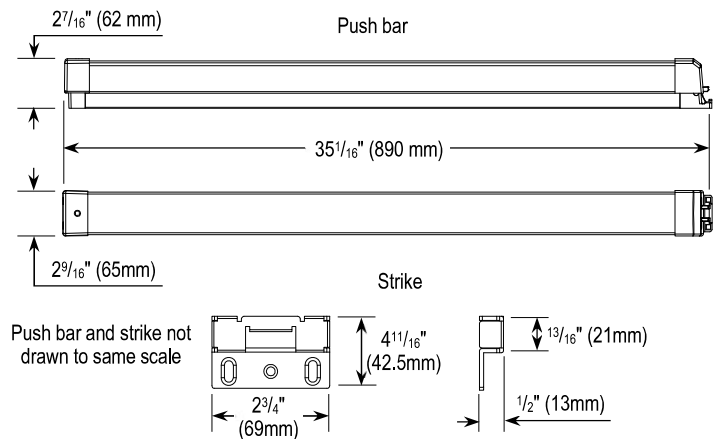


Specifications

Model	SD-961B-36GQ	SD-961B-36GSQ
Operating voltage	N/A	12~24 VDC/VAC
Current draw	N/A	1.5A (0.5A after 3s)
Endurance	N/A	Over 500,000 cycles
Housing	Anodized aluminum	
For doors	36" (91.5cm), min. 32 7/8" (83.5cm), wood or metal	
Relay rating	Form C, 5A@125VAC	
Mode	Fail-secure	
Dimensions	27 1/16" x 2 9/16" x 35 1/16" (61.5 x 65 x 890 mm)	

Double-Locking Spindle

The locking spindle coupled with the sliding lock bolt provides stronger, more secure locking.

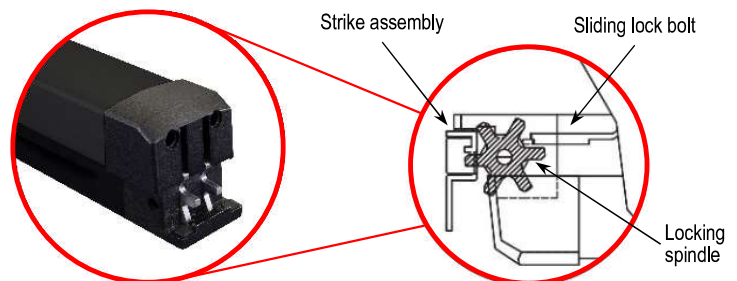

SECO-LARM® U.S.A., Inc.

16842 Millikan Avenue, Irvine, CA 92606

Phone: (949) 261-2999 | (800) 662-0800 Fax: (949) 261-7326

Website: www.seco-larm.com Email: sales@seco-larm.com



Copyright © 2022 SECO-LARM U.S.A., Inc. All rights reserved.
All trademarks are the property of SECO-LARM U.S.A., Inc. or their respective owners.
The SECO-LARM policy is one of continual development. For that reason, SECO-LARM reserves the right to change prices and specifications without notice. SECO-LARM is not responsible for misprints.

SECO-LARM® ENFORCER® CRIMEBUSTER® CBA® SLI®

PL_SD-961x-36GxQ_220506.docx