

## Three- and Four-Channel RF Receivers

**SK-910RD3** 315MHz\*, 3-Channels

**SK-910RD4** 315MHz\*, 4-Channels

**SK-910RD4-4†** 433.92MHz‡, 4-Channels

The upgraded ENFORCER 3- and 4-Channel RF Receivers have increased memory, easier installation, an internal antenna, and all in a smaller case.

### Features

- Five programmable relay output modes – 0.5~99-second timed pulse, 1~99-minute timed pulse, toggle, latch, follow (validity)
- Can receive 315 and 433MHz frequency signals (with optional Extended Range Antenna\*\*)
- Range: Up to 500ft (150m),§ or up to 1,000ft (300m)§ with optional Extended Range Antenna of the same frequency
- Up to 60 transmitter button codes can be learned per channel
- Alphanumeric display indicates learn mode entered, transmitter learned, memory cleared, RF reception, and relay output mode
- Display hidden in semi-transparent case until lit
- Pushbutton programming, no need to cut jumpers
- Compatible with all ENFORCER transmitters of the same frequency



SK-910RD4 shown



### Specifications

| Model                 | SK-910RD3                                                                                                       | SK-910RD4                              | SK-910RD4-4† |
|-----------------------|-----------------------------------------------------------------------------------------------------------------|----------------------------------------|--------------|
| Operating frequency   | 315MHz*                                                                                                         |                                        | 433.92MHz‡   |
| Certifications        | FCC                                                                                                             |                                        | CE           |
| Memory capacity       | 60 Transmitter button codes per channel                                                                         |                                        |              |
| Operating voltage     | 11~24 VAC/VDC                                                                                                   |                                        |              |
| Current draw (max.)   | Standby                                                                                                         | 16mA@12 VDC, 12mA@24 VDC               |              |
|                       | Active                                                                                                          | 60mA@12 VDC, 50mA@24 VDC (per channel) |              |
| Relay contacts        | Number                                                                                                          | 3                                      | 4            |
|                       | Rating                                                                                                          | Form C 10A@14 VDC                      |              |
| Operating humidity    | 0~95% non-condensing                                                                                            |                                        |              |
| Operating temperature | 32°~167° F (0°~75° C)                                                                                           |                                        |              |
| Dimensions            | 4 <sup>3</sup> / <sub>16</sub> "x7 <sup>7</sup> / <sub>8</sub> "x2 <sup>3</sup> / <sub>8</sub> " (107x23x60 mm) |                                        |              |


\*Can simultaneously receive 433.92MHz with optional SK-93ERSD Extended Range Antenna

†Can simultaneously receive 315MHz with optional SK-91ERSD Extended Range Antenna

‡Special order

§Operating range varies greatly depending on the installation and operating environment

### Dimensions

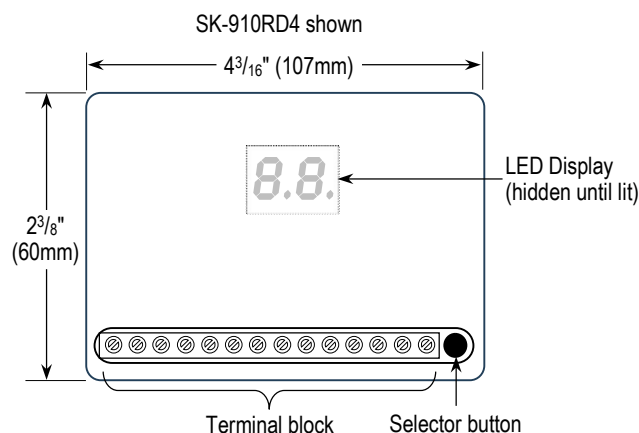

### SECO-LARM® U.S.A., Inc.

16842 Millikan Avenue, Irvine, CA 92606

Phone: (949) 261-2999 | (800) 662-0800 Fax: (949) 261-7326

Website: [www.seco-larm.com](http://www.seco-larm.com) Email: [sales@seco-larm.com](mailto:sales@seco-larm.com)



Copyright © 2023 SECO-LARM U.S.A., Inc. All rights reserved.

All trademarks are the property of SECO-LARM U.S.A., Inc. or their respective owners.

The SECO-LARM policy is one of continual development. For that reason, SECO-LARM reserves the right to change prices and specifications without notice. SECO-LARM is not responsible for misprints.

SECO-LARM® ENFORCER® CRIMEBUSTER® CBA® SLI®

PI\_SK-910RD34\_230801\_ML.docx

## Receptores RF de Tres y Cuatro Canales

**SK-910RD3** 315MHz/433.92MHz\*, 3-Canales

**SK-910RD4** 315MHz/433.92MHz\*, 4-Canales

**SK-910RD4-4†** 433.92MHz/315MHz‡, 4-Canales

*The upgraded ENFORCER 3- and 4-Channel RF Receivers have increased memory, easier installation, an internal antenna, and all in a smaller case.*

### Funciones

- Five programmable relay output modes – 0.5~99-second timed pulse, toggle, latch, follow (validity), 1~99-minute timed pulse
- Can receive 315 and 433MHz frequency signals (with optional Extended Range Antenna\*)
- Range: Up to 500ft (150m),§ or up to 1,000ft (300m)§ with optional Extended Range Antenna
- Up to 60 transmitter button codes can be learned per channel
- Alphanumeric display indicates learn mode entered, transmitter learned, memory cleared, RF reception, and relay output mode
- Display hidden in semi-transparent case until lit
- Pushbutton programming, no need to cut jumpers
- Compatible with all ENFORCER transmitters of the same frequency

### Especificaciones

| Modelo                        |         | SK-910RD3                                                                                                       | SK-910RD4 | SK-910RD4-4† |
|-------------------------------|---------|-----------------------------------------------------------------------------------------------------------------|-----------|--------------|
| Frecuencia RF                 |         | 315MHz*                                                                                                         |           | 433.92MHz‡   |
| Memory capacity               |         | 60 códigos de botón del transmisor por canal                                                                    |           |              |
| Tensión de funcionamiento     |         | 11~24 VCA/VCC                                                                                                   |           |              |
| Sorteo actual (max.)          | Standby | 16mA@12 VCC, 12mA@24 VCC                                                                                        |           |              |
|                               | Active  | 60mA@12 VCC, 50mA@24 VCC (por canal)                                                                            |           |              |
| Contacto de relé              | Number  | 3                                                                                                               | 4         |              |
|                               | Rating  | Form C 10A@14 VCC                                                                                               |           |              |
| Humedad de funcionamiento     |         | 0~95% non-condensing                                                                                            |           |              |
| Temperatura de funcionamiento |         | 32°~167° F (0°~75° C)                                                                                           |           |              |
| Dimensiones                   |         | 4 <sup>3</sup> / <sub>16</sub> "x7 <sup>1</sup> / <sub>8</sub> "x2 <sup>3</sup> / <sub>8</sub> " (107x23x60 mm) |           |              |

\*Can simultaneously receive 433.92MHz with optional SK-93ERSD Extended Range Antenna

†Can simultaneously receive 315MHz with optional SK-91ERSD Extended Range Antenna

‡Special order

§Operating range varies greatly depending on the installation and operating environment

**SECO-LARM® U.S.A., Inc.**

16842 Millikan Avenue, Irvine, CA 92606

Phone: (949) 261-2999 | (800) 662-0800 Fax: (949) 261-7326


Webseite: www.seco-larm.com Email: sales@seco-larm.com



SK-910RD4 mostrado



### Dimensiones

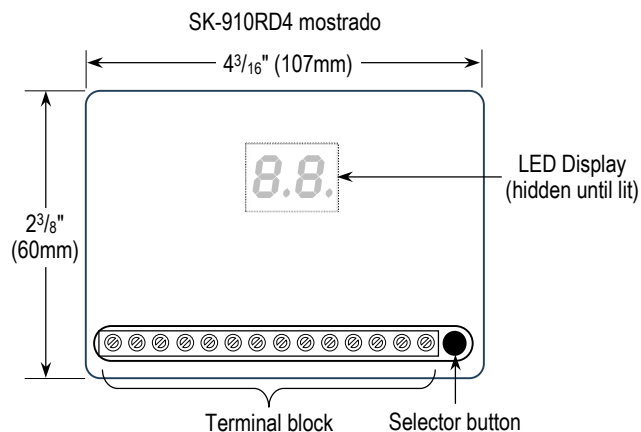

LED Display (hidden until lit)

Terminal block

Selector button



Copyright © 2023 SECO-LARM U.S.A., Inc. Todos los derechos reservados.

Todas las marcas comerciales son propiedad de SECO-LARM U.S.A., Inc. o sus respectivos propietarios.

La póliza de SECO-LARM es de desarrollo y mejora continua. Por esa razón, SECO-LARM se reserva el derecho de cambiar las especificaciones y los precios sin previo aviso. SECO-LARM tampoco es responsable de errores de impresión.

**SECO-LARM® ENFORCER® CRIMEBUSTER® CBA® SLI®**

PI\_SK-910RD34\_230801\_ML.docx