



Flush Mounting

Securing Back Box to Wall for Flush Mounting

Attach second set of wires to top of back box.

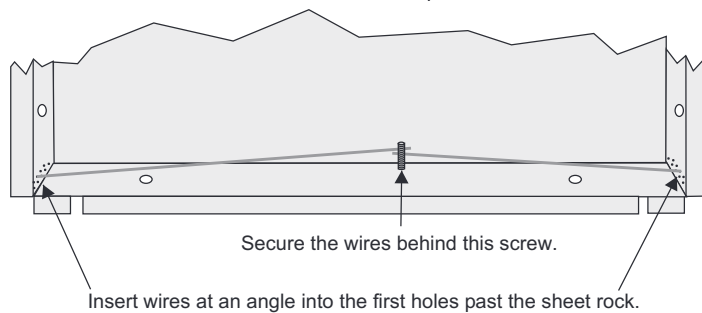

Flush Mounting with Electrical Box (Example)

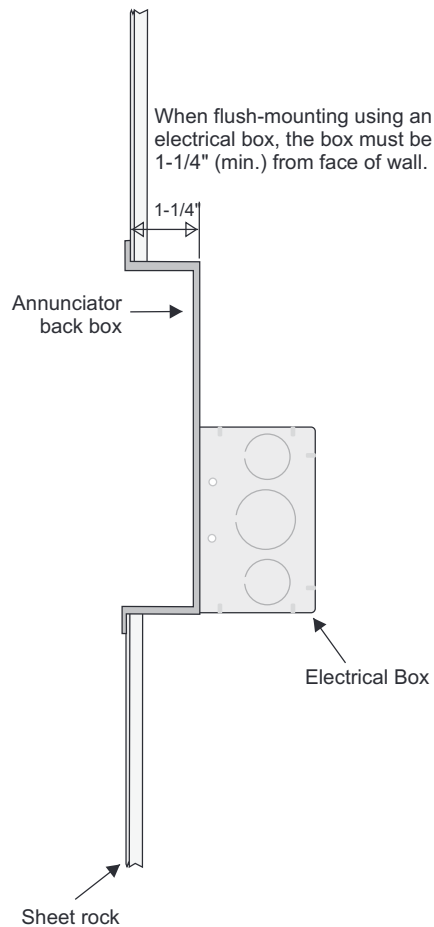

**SILENT
KNIGHT**


Model 5860 Remote Fire Annunciator Installation Quick Reference

Refer to 5820 installation manual (P/N 150972) for complete information.



Installation Steps

1. Make sure power is off at the panel.
2. Annunciator is assembled at the factory. Disassemble as needed.
3. Mount annunciator. See pages 3-4.
4. Wire annunciator to the panel. See page 2.
5. Use dipswitches to set annunciator ID. See page 2.

Annunciator Parts

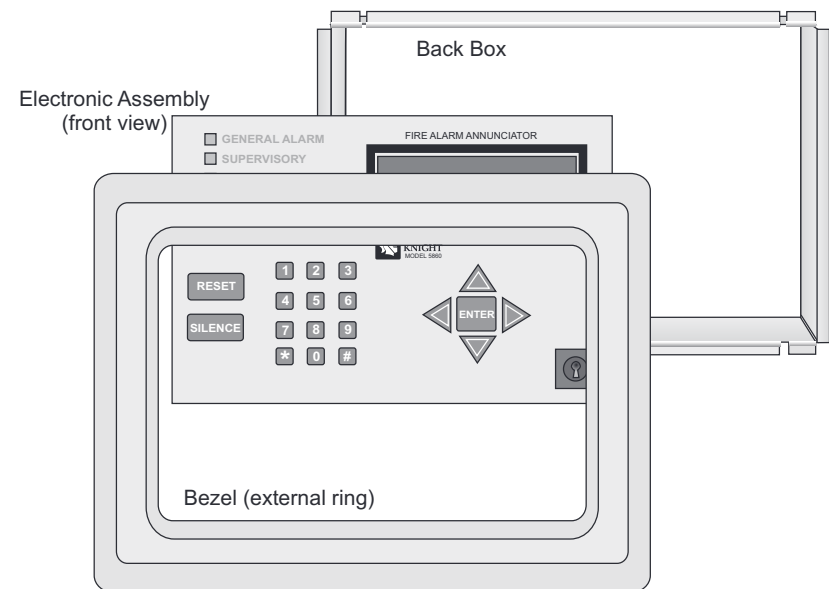

Assembled annunciator also includes mounting wires, 2 set screws.

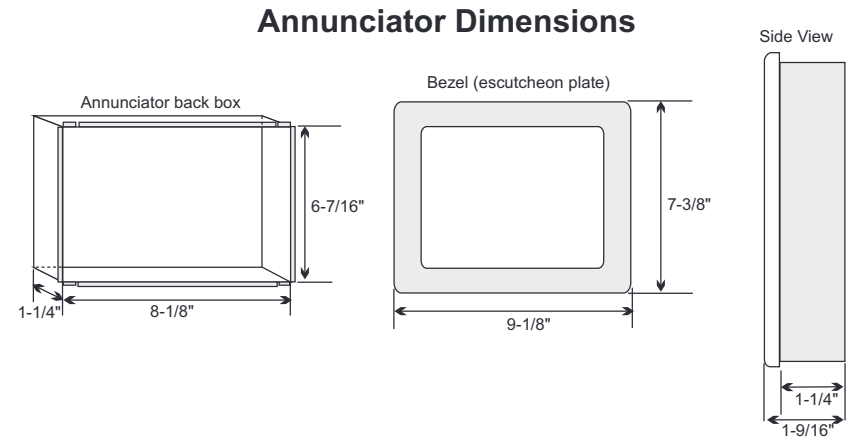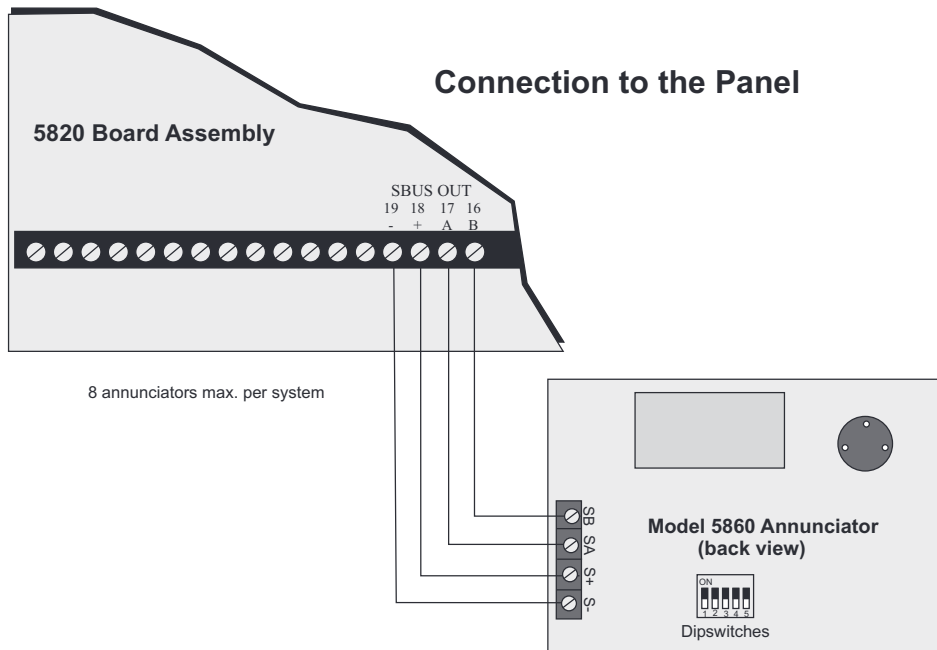

Possible ID Numbers

1 2 3 4 5	Address	1 2 3 4 5	Address
	*0		16
	1		17
	2		18
	3		19
	4		20
	5		21
	6		22
	7		23
	8		24
	9		25
	10		26
	11		27
	12		28
	13		29
	14		30
	15		31

ON

OFF

*Note: Address 0 cannot be used.

Surface Mounting

The Model *5860T-G/R Trim Ring is available to provide a finished look to surface-mounted annunciators.

*5860T-G is gray
5860T-R is red

