

# SK-FML/SK-FSL

## Fiber-optic Modules

The SK-FML and SK-FSL are plug-in fiber loop modules. These work as one channel to transmit or receive communications with the SK-NIC ARCNET communication circuit.


The SK-FML (Fiber-optic Multi-Mode) module allows multimode fiber to connect network nodes. It features ST-style connectors with a maximum attenuation of 8db with 62.5/125 micron cable. The SK-FSL (Fiber-optic Single-Mode) module allows single mode fiber to connect network nodes. It features LC-style connectors with a maximum attenuation of 30db with 9/125 micron cable.

Each fiber loop module can Transmit (TX) or Receive (RX) on a fiber-optic cable connecting to the SK-NIC (Network Interface Card). Up to two fiber loop cards can be added to the SK-NIC, and both cards may be combined in the same configuration.

Farenhyt panels can be networked together using the SK-FSL/SK-FML and SK-NIC to create a virtual system with a combined point capacity. Up to 32 panels can be added to a network. The network architecture provides true peer-to-peer capability allowing network survivability for all hardware, which remains operational in the event of partial system failure.



SK-FSL

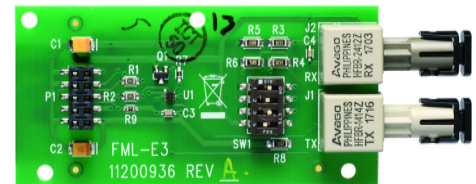

SK-FML

## COMPATIBILITY

The SK-FSL and SK-FML Fiber-optic Modules are compatible with the following Farenhyt Series FACPs:

- IFP-2100
- IFP-2100B
- IFP-2100ECS
- IFP-2100ECSB
- RFP-2100
- RFP-2100B
- IFP-300
- IFP-300B
- IFP-300ECS
- IFP-300ECSB
- IFP-75
- IFP-75B

## FEATURES AND BENEFITS

- UL listed. Complies with UL 864, 10th Edition; UL 2572, 2nd Edition
- Complies with NFPA 72 standard
- CSFM, FDNY, and FM approved
- Simple plug-in card installation
- SK-FML features ST-style connectors with a maximum attenuation of 8 dB with 62.5/125 micron cable
- SK-FSL features LC-style connectors with a maximum attenuation of 30db with 9/125 micron cable
- Provides the option to combine single and multi-mode modules on the same network card
- Connect compatible panels using fiber optic cable for improved multi-site management and lower monthly monitoring costs
- Use single and multi-mode modules on the same network card for added design flexibility
- Mix fiber-optic segments in the same network as existing copper wire segments for more convenient system upgrades

**Honeywell**

Farenhyt Series

# SK-FML/SK-FSL TECHNICAL SPECIFICATIONS

## PHYSICAL

**Dimensions:**

4.0" H x 2.5" W x 0.25" H  
(10.16 cm x 6.35 cm x 0.635 cm)

**Weight:** 6.4oz (181.4g)

## ENVIRONMENTAL

**Operating Temperature:** 32° F to 120° F  
(0° C to 49° C)

**Humidity:** 0% to 93% relative humidity  
(noncondensing)

## ELECTRICAL

**Operating Voltage:** 24VDC

|                              | SK-FML   | SK-FSL |
|------------------------------|----------|--------|
| <b>Connection Style:</b>     | ST       | LC     |
| <b>Cable Type (microns):</b> | 62.5/125 | 9/125  |
| <b>Standby Current (mA):</b> | 53       | 79     |
| <b>Alarm Current (mA):</b>   | 53       | 79     |

## ORDERING INFORMATION

**SK-FML:** Fiber-optic Module, multi-mode

**SK-FSL:** Fiber-optic Module, single-mode

## ACCESSORIES

**SK-NIC:** Network Interface Card

**SK-NIC-KIT:** Accessory kit for installing the SK-NIC outside of the FACP cabinet. Includes cabinet and one SK-NIC Network Card.

**Note:** Refer to SK-NIC datasheet 351622 for additional information.

## STANDARDS AND CODES

The SK-FML/SK-FSL complies with the following standards/codes:

- UL 864, 10th Edition: Standard for Control Units for Fire Alarm Systems
- UL 2572, 2nd Edition: Standard for Mass Notification Systems
- NFPA 72: National Fire Alarm and Signaling Code

## AGENCY LISTINGS AND APPROVALS

- UL Listed: S2766
- FDNY: COA # 6017, 6122, 6198, 6296A, 6299, 6302A, 6304
- CSFM Approved
- FM Approved

Honeywell® is a registered trademark and Farenhyt™ is a trademark of Honeywell International, Inc.

This document is not intended to be used for installation purposes. We try to keep our product information up-to-date and accurate. We cannot cover all specific applications or anticipate all requirements. All specifications are subject to change without notice.

Country of origin: U.S.A.