



INSTRUCTION MANUAL




PUBLIC ADDRESS AMPLIFIER

PBM-15

15 WATT RMS

PBM-30

30 WATT RMS

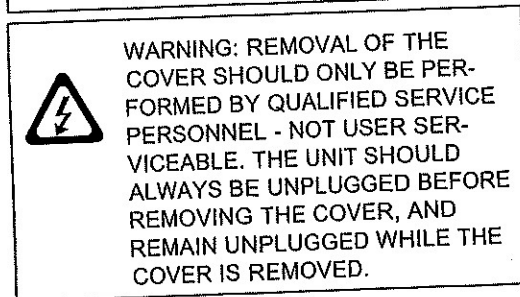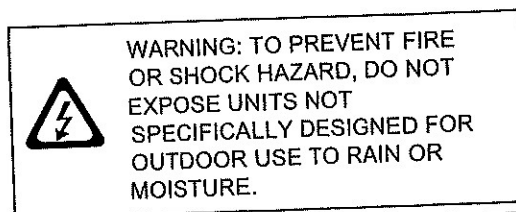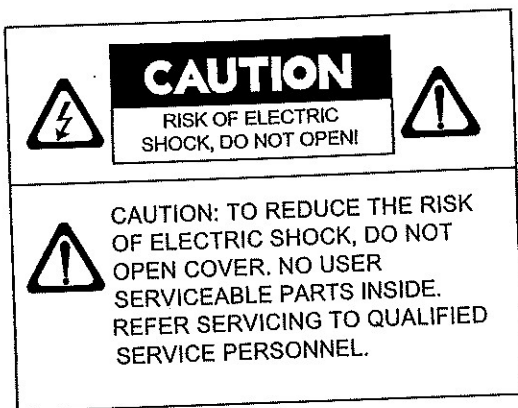

PRECAUTIONS

1. Unpacking

After removing the amplifier from the carton, inspect for any exterior damage to the unit. If damage is noted, notify the carrier at once so that a claim can be justified. Save all packing material. This is important when the claim is processed.

2. Ventilation

To offset heat generated by the unit, it is necessary to provide ample ventilation around the unit. Avoid blocking or impeding the ventilation holes on the unit. To prevent unnecessary problems, install the unit on a place free from any vibrations, direct sunlight, humidity or dust circulation.

3. Avoid spilling liquids or allowing materials to enter the cabinet

If the unit gets wet or any foreign material enters the cabinet, immediately disconnect the A.C. line cord and consult your dealer or qualified technician.

CSI/SPECO

200 NEW HIGHWAY, AMITYVILLE, NY 11701
PHONE : 1-800-645-5516, 631-957-8700 IN METRO NY
<http://www.specotech.com>


IMPORTANT SAFETY INSTRUCTIONS

1. Read these instructions.
2. Keep these instructions.
3. Heed all warnings.
4. Follow all instructions.
5. Do not use this apparatus near water.
6. Clean only with dry cloth.
7. Do not block any ventilation openings. Install in accordance with the manufacturer's instructions.
8. Do not install near any heat sources such as radiators, heat registers, stoves, or other apparatus (including amplifiers) that produce heat.
9. Do not defeat the purpose of the polarized or grounding-type plug. A polarized plug has two blades with one wider than the other. A grounding type plug has two blades and a third grounding prong. The wide blade or the third prong are provided for your safety. If the provided plug does not fit into your outlet, consult an electrician for replacement of the obsolete outlet.
10. Protect the power cord from being walked on or pinched particularly at plugs, convenience receptacles, and the point where the exit from the apparatus.
11. Only use the attachments/accessories specified by the manufacturer.
12. Use only with the cart, stand, tripod, bracket, or table specified by the manufacturer, or sold with the apparatus. When a cart is used, use caution when moving the cart/apparatus combination to avoid injury from tip-over.
13. Unplug this apparatus during lightning storms or when unused for long periods of time.
14. Refer all servicing to qualified service personnel. Servicing is required when the apparatus has been damaged in any way such as power supply cord or plug is damaged, liquid has been spilled or objects have fallen into the apparatus, the apparatus has been exposed to rain or moisture, does not operate normally, or has been dropped.
15. Apparatus shall not be exposed to dripping or splashing and no objects filled with liquids, such as vases, shall be placed on the apparatus.
16. Warning – To reduce the risk of fire or electric shock, do not expose this apparatus to rain or moisture.
17. Apparatus shall not be exposed to dripping or splashing and no objects filled with liquids, such as vases, shall be placed on the apparatus.
18. Caution – Use of any controls or adjustments or performance of procedures other than those specified herein may result in hazardous radiation exposure.




Controls and Connections

FRONT PANEL

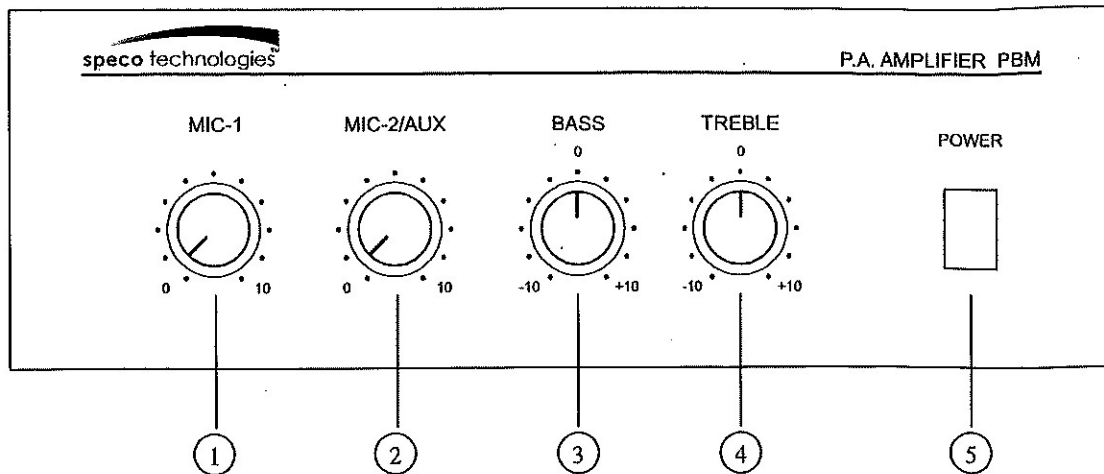

REAR PANEL

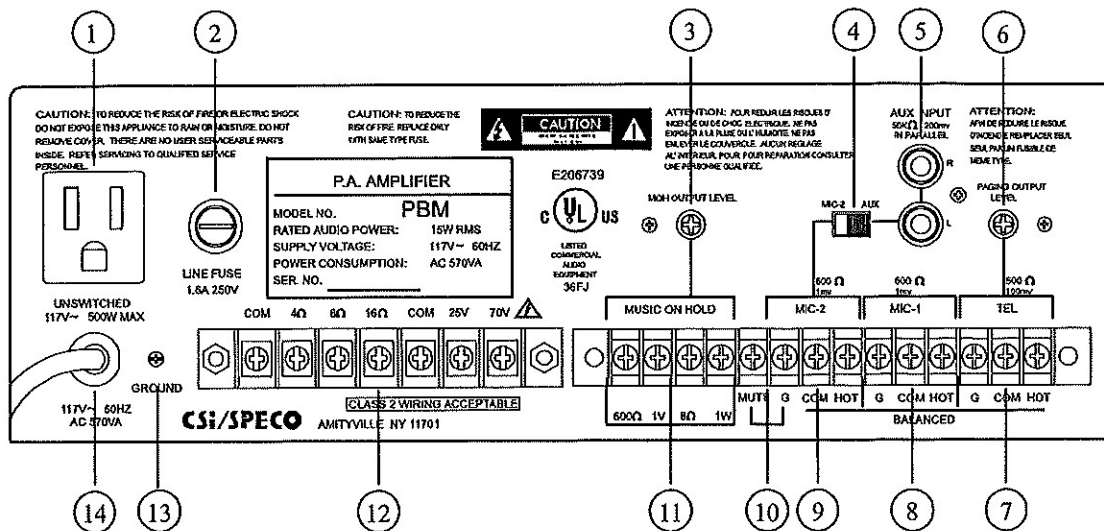

FRONT PANEL

- 1) MIC-1 Volume control
- 2) MIC-2/AUX Volume control
- 3) BASS Control
- 4) TREBLE Control
- 5) POWER on/off switch with indicator

REAR PANEL

- 1) AC accessory outlet (Unswitched)
- 2) AC fuse holder
- 3) MOH output level control*
- 4) MIC-2/AUX input selector switch
- 5) AUX input RCA jacks
- 6) TEL/PAGING output level control**
- 7) TEL/PAGING input terminals(Balanced)**
- 8) MIC-1 input terminals(Balanced)
- 9) MIC-2 input terminals(Balanced)
- 10) Manual muting terminals
- 11) MOH output terminals*
- 12) Speaker outputs
- 13) Ground
- 14) AC power cord

*MOH = Music on hold

**TEL/PAGING= Connection input terminals for general or emergency paging.

**TEL/PAGING is not to be connected directly to a telephone circuit or TNV circuit.

FRONT PANEL

- 1) **MIC-1 Volume control.** Adjusts audio level of MIC-1.
- 2) **MIC-2/AUX Volume control.** Adjusts audio level of MIC-2/AUX.
- 3) **Bass Control.** Low frequency tone control.
- 4) **Treble Control.** High frequency tone control.
- 5) **Power on/off switch with indicator.** Illuminates when power is on.

REAR PANEL

- 1) **AC accessory outlet (Unswitched).** Unswitched AC Auxiliary outlet for a 120VAC, 50/60Hz power source.
- 2) **AC fuse holder.**
- 3) **MOH output level control.** Controls volume of MOH output. (Music on hold)
- 4) **MIC-2/AUX input selector switch.** Allows for selection of either low impedance MIC-2 input or high impedance AUX input.
- 5) **AUX input RCA jacks.** Provides connection for a booster amplifier. The input impedance of the equipment should be more than 600 Ohm.
- 6) **TEL/PAGING output level control.** Controls audio level of telephone output.
- 7) **TEL/PAGING balanced input terminals.** Accepts a balanced telephone paging signal.
- 8) **MIC-1 balanced input terminals.** Accepts a balanced low impedance microphone signal.
- 9) **MIC-2 balanced input terminals.** Accepts a balanced low impedance microphone signal.
- 10) **Manual muting terminals.** Provides contact closure muting of the MIC-2/AUX input during paging.
- 11) **MOH output terminals.** Provides two MOH outputs 600 Ohm, 1 Volt and 8 Ohm, 1 Watt.
- 12) **Speaker outputs.** Speaker lines must be connected to "COM" and one (and only one) of the remaining screw terminals.
- 13) **Ground.** Cabinet enclosure unit ground.
- 14) **AC power cord.** AC power cord with three pin plug for a 120VAC 50/60 Hz, power source.
Do not defeat the ground pin.

Note: MIC-1/TEL input include internally adjustable (factory set) VOX muting of the MIC-2 and AUX input during paging.

Screw terminal designations : G-GND, HOT-Signal positive, COM-Signal negative/common.

Overcoming Ground Loop Problems

If the amplifier is mounted in a rack unit (Use rack mount part # PBM-RK1), or is used with equipment having its own ground, it is necessary to ensure that ground loops and the associated problems of hum on the output signal are not introduced by the ground wiring. (see warning)

Warning

To overcome this potential problem, the electrical and the mechanical ground on the amplifier may be separated by completely removing the wire connecting the power source to ground.

CONSULT AN ELECTRONICS TECHNICIAN TO ACCOMPLISH THIS TO AVOID POTENTIAL PERSONAL INJURY OR A HAZARDOUS CONDITION.

SPEAKER CONNECTION

The rear panel of the amplifier contains a 7 screw terminal strip for connection of speakers.

BE CAREFUL TO CONNECT SPEAKERS PROPERLY, see impedance and line voltage instructions below.

The speaker lines are connected directly between the appropriate COM terminal on the 7 screw terminal strip and the terminal corresponding to the impedance of the speaker(s) or of the line voltage selected.

4, 8 and 16 OHM CONNECTIONS (refer to figure 3).

Connect the cables to the terminals on the 7 screw terminal strip provided. Use the screw terminals which correspond to the impedance of the speaker(s). One lead must always be connected to the COM. This is just an example. If in doubt consult a qualified technician.

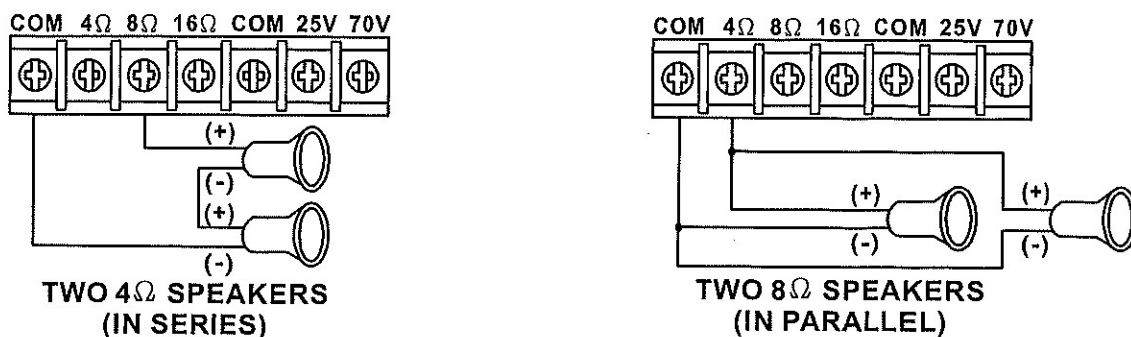


FIGURE 3

25V and 70V CONSTANT LINE VOLTAGE CONNECTIONS

(refer to figure 4).

IMPORTANT NOTICE: When the 25V and 70V constant line voltages are used, a line matching transformer must be used with each speaker. All transformers must be connected in parallel.

HOW TO CONNECT LINE MATCHING TRANSFORMERS IN PARALLEL

(25 VOLT LINE OR 70 VOLT LINE)

ALWAYS CONNECT LINE TRANSFORMERS IN PARALLEL

NEVER CONNECT LINE TRANSFORMERS IN SERIES

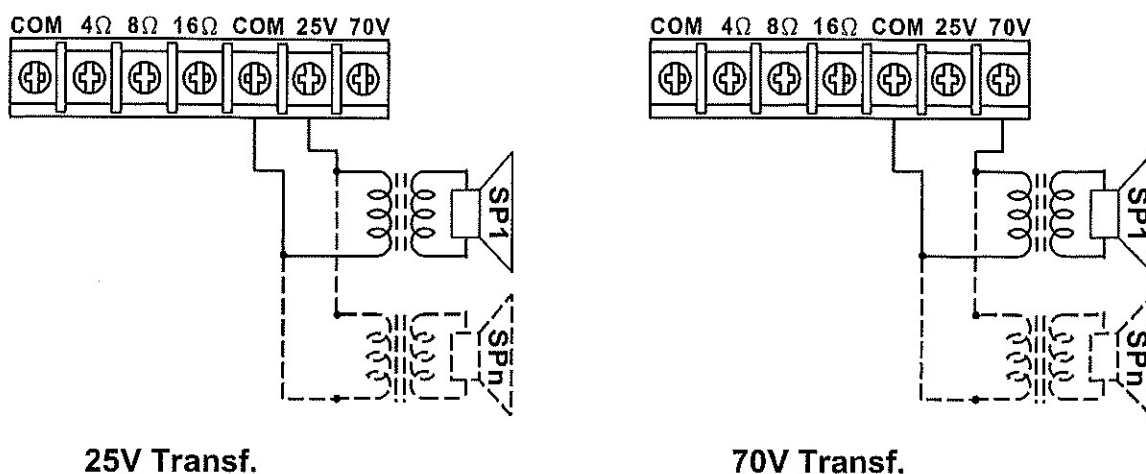


FIGURE 4

SPEAKER IMPEDANCES:

Speaker impedance taps for 4, 8 and 16 Ohm speakers are provided on a terminal strip on the rear panel of the unit. Also, outputs for 25V and 70V constant line voltage are provided. To connect the power output directly to a speaker or PA horn or a combination of speakers and/or PA horns which have a resulting voice coil impedance of 4, 8 or 16 Ohm, connect to the COM and the proper impedance tap on the terminal strip. Be sure the speaker(s) or PA horn(s) is capable of handling a reasonable power output from the amplifier or permanent damage to the speaker(s) or PA horn(s) may result. Also, be careful not to overload the amplifier with too many speakers or PA horns. If it is desired to use a number and variety of speakers, the speakers must be arranged in various series or parallel arrays to provide proper impedance matching or the 25V or 70V constant line voltage must be used. If you are not familiar with impedance matching consult a professional installer or technician for advice. If the 25V or 70V constant line voltages are used, a line matching transformer must be used with each speaker. Again do not overload or use incompatible speakers. Line transformer are the preferred method for multi-speaker installation.

CABLE REQUIREMENTS

Output cabling need not be shielded in most cases and should be of sufficient gauge to minimize losses due to the resistance of the wire over long runs (insertion loss). Cable thinner than 18 gauge is not recommended. Long runs require 16 gauge or heavier.

In some cases, where the output cable is run in close proximity to unshielded intercom cables, electrical cables, radio transmission antenna or other sources of interference or when the amplifier is being used for paging from a telephone system, the amplifier may require shielded output cabling to prevent audio feedback or interference.

PRIORITY PAGE :THE AMPLIFIER FEATURES A VOICE ACTIVATED PRIORITY PAGE CIRCUIT AND AUTOMATICALLY MUTES ALL PROGRAM MATERIAL (TUNER/TAPE/CD,ETC.) FROM THE AMPLIFIERS OUTPUT AND PERMITS MICROPHONE # 1 AND THE TELEPHONE INPUT TO
OVERRIDE FOR PAGING ANNOUNCEMENTS.

TELEPHONE LINE: A TELEPHONE LINE INPUT OF 600 OHM IS PROVIDED.

THERE ARE MANY OTHER FEATURES OFFERED. PLEASE READ MANUAL COMPLETELY.

**WHENEVER IN DOUBT ABOUT INSTALLATION, CONSULT WITH A PROFESSIONAL
INSTALLER OR TECHNICIAN OR PERSONAL INJURY, DAMAGE TO THIS AMPLIFIER
AND/OR SPEAKERS MAY RESULT AND YOUR WARRANTY MAY BE VOIDED.**

Determining Your Amplifier Needs for Sound Systems

Step 1: Fill out Wattage Tap Requirement Chart (to right) determining the number of speakers that will be used at each wattage tap for the amplifier.

Step 2: Multiple the number of speakers by each wattage tap to determine Total Wattage Requirement per Tap setting (See Ex A).

Step 3: Add all the figures in shaded area to determine the total Wattage Requirement for the amplifier.

Step 4: Match total Wattage Requirement to the bottom chart "Recommended Amplifier Wattage Chart" to determine acceptable RMS Wattage your amplifier should have.

Step 5: Repeat this process for each amplifier system required.

Wattage Tap Requirement Chart

	Set Wattage Taps		Number of Speakers at Set Tap		Total Wattage Requirement per Tap Setting
Ex A)	5	X	10	=	50
	60	X		=	
	30	X		=	
	20	X		=	
	15	X		=	
	10	X		=	
	7.5	X		=	
	5	X		=	
	4	X		=	
	3.75	X		=	
	2.5	X		=	
	2	X		=	
	1.50	X		=	
	1.25	X		=	
	1.00	X		=	
	0.50	X		=	
	0.25	X		=	
	0.125	X		=	
Total Sum of Shaded Area Represents Total Wattage Requirement					

Recommended Amplifier Wattage Chart

	Acceptable Amplifier RMS Wattage			
	15 Watt	30 Watt	60 Watt	120 Watt
If Sum Wattage Total is 12 Watts or Less	X	X	X	X
If Sum Wattage Total is between 13 and 24 Watts	X*	X	X	X
If Sum Wattage Total is between 25 and 48 Watts	X*	X*	X	X
If Sum Wattage Total is between 49 and 96 Watts	X*	X*	X*	X
If Sum Wattage Total is between 97 and 204 Watts	X*	X*	X*	X*
If Sum Wattage Total is between 205 and 216 Watts		X*	X*	X*
If Sum Wattage Total is between 217 and 240 Watts			X*	X*
If Sum Wattage Total is between 241 and 288 Watts				X*

* RMS Amplifier used in conjunction with Speco Technologies' P-240A Power Booster Amp

For more information contact us at:


Speco Technologies 200 New Highway, Amityville, NY 11701 Web: www.specotech.com
Toll Free: 1-800-645-5516 In Metro NY: 631-957-8700 Fax: 631-957-9142 or 631-957-3880

SPECIFICATIONS

Type	Public Address Mixer Power Amplifier	
Model No.	PBM-15	PBM-30
Power supply	AC 120V, 50/60Hz	AC 120V, 50/60Hz
Rated output power	15W RMS	30W RMS
Frequency response	50~15 KHz ± 3 dB	50~15 KHz ± 3 dB
Total harmonic distortion	1% or less at 1 KHz at rated output	1% or less at 1KHz at rated output
Input sensitivity and impedance	TEL :100mV/600 Ohm, Balanced MIC-1:1.0mV/600 Ohm, Balanced MIC-2:1.0mV/600 Ohm, Balanced AUX:200mV/50K Ohm, Unbalanced	TEL :100mV/600 Ohm, Balanced MIC-1:1.0mV/600 Ohm, Balanced MIC-2:1.0mV/600 Ohm, Balanced AUX:200mV/50K Ohm, Unbalanced
S/N Ratio	MIC-1 Better than 55 dB MIC-2 Better than 55 dB TEL Better than 60 dB AUX Better than 70 dB	MIC-1 Better than 55 dB MIC-2 Better than 55 dB TEL Better than 60 dB AUX Better than 70 dB
Speaker outputs	4 Ohm, 8 Ohm, 16 Ohm 25V, 70V line outputs	4 Ohm, 8 Ohm, 16 Ohm 25V, 70V line outputs
*MOH output	600 Ohm @ 1V and 8 Ohm - 1Watt	600 Ohm @ 1V and 8 Ohm - 1Watt
Mute level	MIC-2/ AUX ≥ 40 dB	MIC-2/ AUX ≥ 40 dB
VOX level	MIC-1/TEL 0~40 dB Adjustable	MIC-1/TEL 0~40 dB Adjustable**
Tone control	Bass: ± 10 dB at 100Hz Treble: ± 10 dB at 10KHz	Bass: ± 10 dB at 100Hz Treble: ± 10 dB at 10KHz
Dimensions	272mm(W)x88mm(H)x240mm(D) 10.7"(W)x3.5"(H)x9.4"(D)	272mm(W)x88mm(H)x240mm(D) 10.7"(W)x3.5"(H)x9.4"(D)
Weight	Approx 8 lbs(3.7 kgs)	Approx 22 lbs (10.0 kgs)
Finish	Black	Black
Mounting options	Table top or 19" rack or wall mountable (Use # PBM-RK1 rack mount bracket)	Table top or 19" rack or wall mountable (Use # PBM-RK1 rack mount bracket)

*MOH = Music on hold

**Factory set : - 40 dB

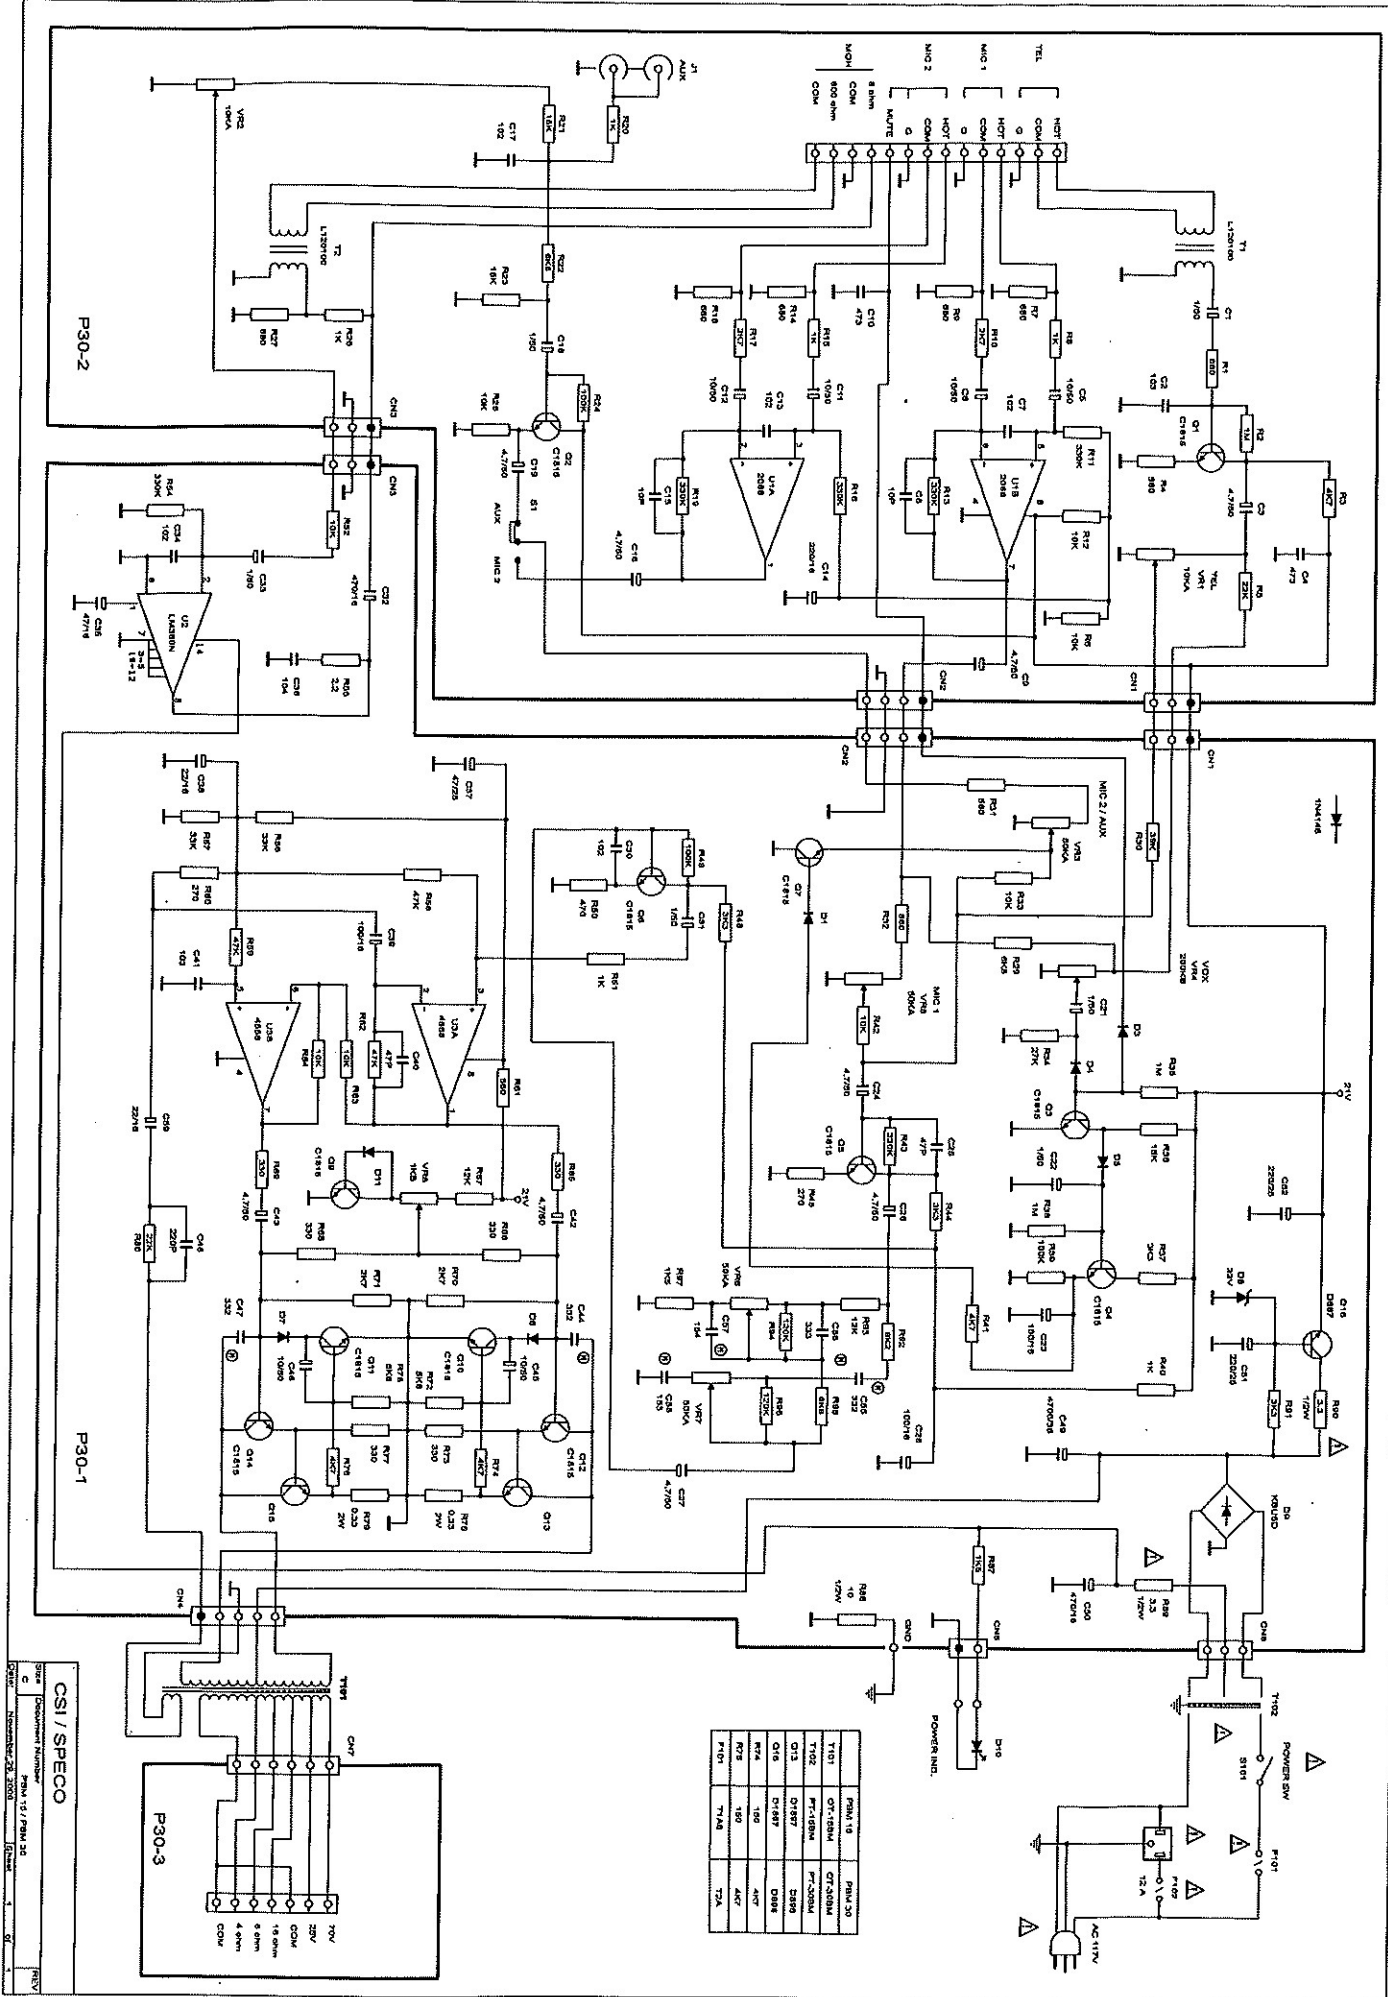

Part	Value	Part	Value
T1	0.1-10M	T2	0.1-10M
T3	0.1-10M	T4	0.1-10M
T5	0.1-10M	T6	0.1-10M
T7	0.1-10M	T8	0.1-10M
T9	0.1-10M	T10	0.1-10M
T11	0.1-10M	T12	0.1-10M
T13	0.1-10M	T14	0.1-10M
T15	0.1-10M	T16	0.1-10M
T17	0.1-10M	T18	0.1-10M
T19	0.1-10M	T20	0.1-10M
T21	0.1-10M	T22	0.1-10M
T23	0.1-10M	T24	0.1-10M
T25	0.1-10M	T26	0.1-10M
T27	0.1-10M	T28	0.1-10M
T29	0.1-10M	T30	0.1-10M
T31	0.1-10M	T32	0.1-10M
T33	0.1-10M	T34	0.1-10M
T35	0.1-10M	T36	0.1-10M
T37	0.1-10M	T38	0.1-10M
T39	0.1-10M	T40	0.1-10M
T41	0.1-10M	T42	0.1-10M
T43	0.1-10M	T44	0.1-10M
T45	0.1-10M	T46	0.1-10M
T47	0.1-10M	T48	0.1-10M
T49	0.1-10M	T50	0.1-10M
T51	0.1-10M	T52	0.1-10M
T53	0.1-10M	T54	0.1-10M
T55	0.1-10M	T56	0.1-10M
T57	0.1-10M	T58	0.1-10M
T59	0.1-10M	T60	0.1-10M
T61	0.1-10M	T62	0.1-10M
T63	0.1-10M	T64	0.1-10M
T65	0.1-10M	T66	0.1-10M
T67	0.1-10M	T68	0.1-10M
T69	0.1-10M	T70	0.1-10M
T71	0.1-10M	T72	0.1-10M
T73	0.1-10M	T74	0.1-10M
T75	0.1-10M	T76	0.1-10M
T77	0.1-10M	T78	0.1-10M
T79	0.1-10M	T80	0.1-10M
T81	0.1-10M	T82	0.1-10M
T83	0.1-10M	T84	0.1-10M
T85	0.1-10M	T86	0.1-10M
T87	0.1-10M	T88	0.1-10M
T89	0.1-10M	T90	0.1-10M
T91	0.1-10M	T92	0.1-10M
T93	0.1-10M	T94	0.1-10M
T95	0.1-10M	T96	0.1-10M
T97	0.1-10M	T98	0.1-10M
T99	0.1-10M	T100	0.1-10M

CSI / SPECO
 Document Number: PMA 12 / PMA 20
 Revision: 1.00
 Date: 10/10/2000