




SPG6MT and SPG6MTCAN Installation Instructions

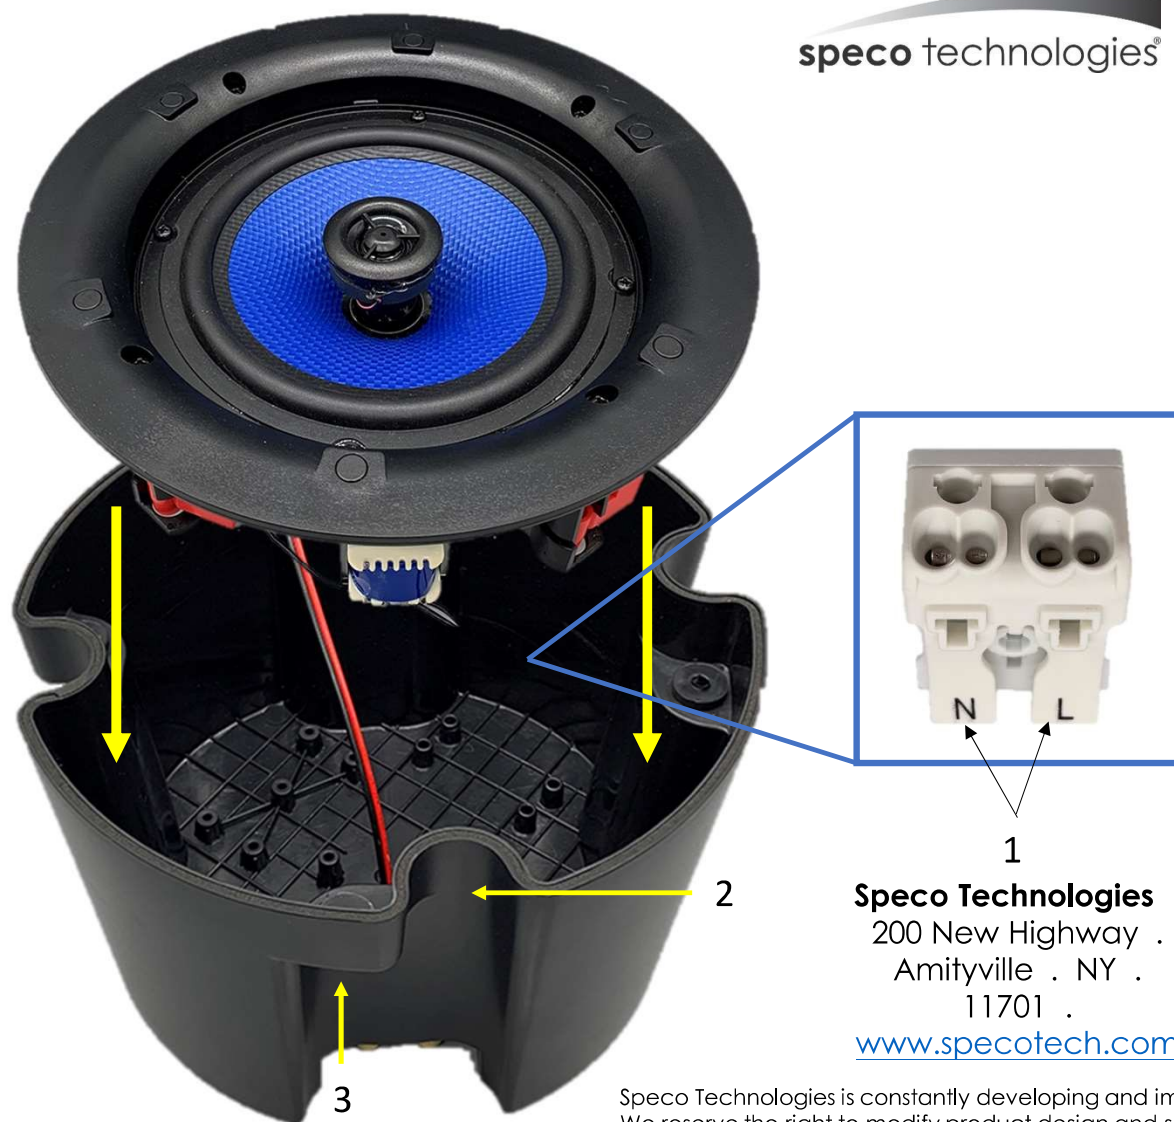

1. Your SPG6MT speaker will have a plastic wire terminal connected to it, as pictured in the inset to the left. The top part will already be connected to the speaker. To connect the speaker wiring to the backcan, simply push the N tab and insert the negative wire on the terminal and push the "L" tab and connect the positive wire on the terminal.
2. Ensure the red dogleg clamps are open and slip the speaker onto the backcan. Line up the clamps with the cutouts on the top of the backcan.
3. Flip the speaker over (taking care it does not separate), and using the included screws, secure the speaker to the backcan using the 4 screw holes next to the red dogleg clamps.
4. Using the press terminals on the bottom of the backcan, connect the red terminal to the positive terminal on your 70V amplifier, and the black terminal to the negative/common terminal on your 70V amplifier.

Speco Technologies is constantly developing and improving products.

We reserve the right to modify product design and specifications without notice and without incurring any obligation.

REV. 08/24/22