

CATEGORY 6 SHIELDED CABLE, 4 PAIR, F/UTP, UL CMR

Description:

CAT6 SHIELDED F/UTP- ENHANCED 550MHz 23AWG
SOLID BC, 4PR, F/UTP, ANSI/TIA 568.2-D, ISO/IEC 11801
CLASS E, UL CMR, PVC JKT - 1000 FT/305M SPOOL

Part Number:


CAT6SH-BK
CAT6SH-BL
CAT6SH-GY
CAT6SH-WT

Jacket Color:

Black
Blue
Gray
White

Regulatory:

UL 444 ANSI/TIA 568.2-D and ISO/IEC 11801 Class E
Type (UL) CMR or c(UL) FT4
EU RoHS 2011/65 EU Compliant

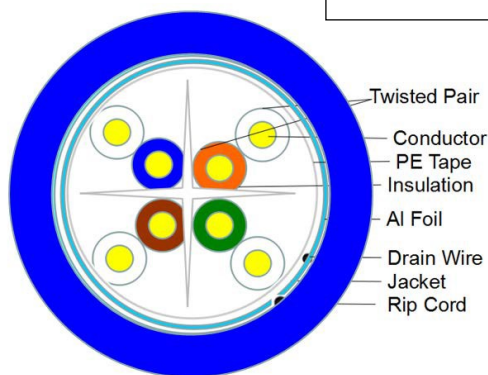

Application: Lan Cable

Construction Characteristics:

Conductor	Material	Solid Bare Copper
	Size	23AWG X 4P
	Construction	1/0.57+/-0.005mm
Insulation	Material	HDPE
	Min.Thickness	0.200mm
	AVG.Thickness	0.220mm
	Diameter	1.1+/-0.05mm
	Colors	Blue- White/Blue
		Orange-White/Orange
		Green-White/Green
		Brown-White/Brown
Shield	Wrap	PET tape
	Drain wire TC	1/0.50+/-0.005
	Shield	AL Foil
Jacket	Material	PVC
	Min.Thickness	0.60mm
	AVG.Thickness	0.70mm
	Diameter	7.50+/-0.20mm
	Rip Cord	Nylon
	Color	Blue
Bend radius		Min 20D/150mm

Electrical & Physical Characteristics:

Operating Temperature Range			- 20°C + 75°C
Minimum Installation Temperature			0°C + 40°C
Conductor Resistance			Max 72.2ohm/km at 20°C
Dielectric Strength			Min AC1.5KV
Spark Test			5.0KV
Insulation	Unaged	Tensile Strenght	12.3Mpa
		Elongation	150%
	Aged	Tensile Strenght	9.8Mpa(100°C 168h)
		Elongation	100%(100°C 168h)
Jacket	Unaged	Tensile Strenght	13.8Mpa
		Elongation	100%
	Aged	Tensile Strenght	11.7Mpa(100°C 168h)
		Elongation	50%(100°C 168h)
Rated Voltage			Max 300Volts
DC Resisitance Unbalance			Max 5%
Pair-to-Ground Capacitance Unbalance			Max 3300pF/km
Characteristic Impedance			100+/-15OHM
Nominal Velocity of Propagation(%)			67~69
Propagation Delay			Max 536ns/100m
Delay Skew			Max 45ns/100m

Marking:

STRUCTURED CABLE PRODUCTS --- CAT6-SH --- CAT6 SHIELDED ENHANCED 550MHz F/UTP ANSI/TIA 568.2-D
ISO/IEC 11801 CLASS E E198134 SCP3 (UL) C(UL) CMR 4PR 23AWG SOL BC - PVC JKT FT4 75C
EU RoHS EC ZONE/DEVICE A B C D E 0 1 2 3 4 5 6 7 8 9 ***M

Packaging:

Approx.Weight	Approx.Dimension(mm)	Package	Packages per pallet
21kgs/46.297lbs	380X290X200	1000FT/305M Spool	27

Performance

ITEM Frequency	Attenuatio n Max	NEXT Min (dB)	PS NEXT Min (dB)	ACR Min (dB)	RL Min (dB)	ELFEXT Min (dB)	PS ELFEXT	PSACR Min (dB)
1	2	74.3	72.3	72.3	20	67.8	64.8	70.3
4	3.8	65.3	63.3	61.5	23	55.8	52.8	59.5
8	5.3	60.8	58.8	55.5	24.5	49.7	46.7	53.5
10	6	59.3	57.3	53.3	25	47.8	44.8	51.3
16	7.6	56.2	54.2	48.6	25	43.7	40.7	46.6
20	8.5	54.8	52.8	46.3	25	41.8	38.8	44.3
25	9.5	53.3	51.3	43.8	24.3	39.8	36.8	41.8
31.25	10.7	51.9	49.9	41.2	23.6	37.9	34.9	39.2
62.5	15.4	47.4	45.4	32	21.5	31.9	28.9	30
100	19.8	44.3	42.3	24.5	20.1	27.8	24.8	22.5
200	29	39.8	37.8	10.8	18	21.8	18.8	8.8
250	32.8	38.3	36.3	5.5	17.3	19.8	16.8	3.5
300	36.4	37.1	35.1	0.7	16.8	18.3	15.3	---
400	43	35.3	33.3	---	15.9	15.8	12.8	---
500	48.9	33.8	31.8	---	15.2	13.8	10.8	---