

SCP PART#: HNC-18

Description

3x CAT6 (HNCPROPLUS) 23 AWG SOLID BC, UTP
+ 1x RG6/U QUAD SHIELD COAX BC - (BUNDLED)-
EN50575:2014 Eca, UL CM, PVC JKT- BLUE-
500 FT/152M SPOOL


Regulatory

UL 444, TIA/EIA 568-C.2 and ISO/IEC 11801 Ed2
Type (UL) CM, CMG, or c(UL) FT4
EU RoHS 2011/65 EU Compliant

Application: BUNDLE CABLE

Construction Characteristics:

Conductor(CAT6)	Material	Solid Bare Copper
	Size	23AWG X 4P
	Construction	1/0.57+/-0.005mm
Insulation	Material	HDPE
	Min.Thickness	0.200mm
	AVG.Thickness	0.220mm
	Diameter	1.03+/-0.10mm
	Colors	Blue- White/Blue
		Orange-White/Orange
		Green-White/Green
Jacket	Material	PVC
	Min.Thickness	0.54mm
	AVG.Thickness	0.60mm
	Diameter	6.20+/-0.20mm
	Rip Cord	Nylon
	Colors	Blue,Gray,Yellow
Conductor(RG6)	Material	Solid Bare Copper
	Size	18AWG X 1C
	Construction	1/1.02+/-0.004mm
Insulation	Material	FPE
	Min.Thickness	1.60mm
	AVG.Thickness	1.79mm
	Diameter	4.57+/-0.10mm
	Colors	Natural
Shield	Bonded AL-FOIL	Yes
	Braiding-1(0.12±0.005AL wire)	Coverage>60%
	Double AL-Foil	Yes
	Braiding-2(0.12±0.005AL wire)	Coverage>40%
Jacket	Material	PVC
	Min.Thickness	0.75mm
	AVG.Thickness	0.84mm
	Diameter	7.25+/-0.20mm
	Color	Black
Assembly(3XCAT6+1XRG6/U)		
Jacket	Material	PVC
	AVG.Thickness	0.80mm
	Min.Thickness	0.70mm
	Diameter	17.0+/-0.20mm
	Colors	Blue
	Rip Cord	Nylon
Bend Radius		Min 20D/340mm

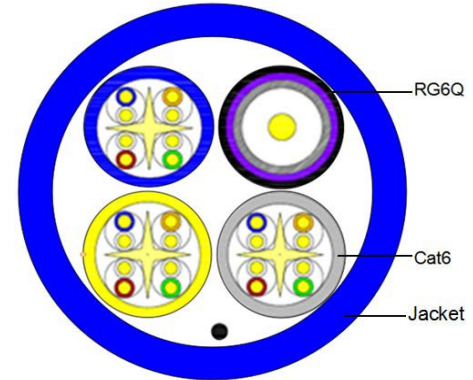

Electrical & Physical Characteristics(CAT6)

Operating Temperature Range			- 20°C +70°C
Conductor Resistance			Max 72.2ohm/km at 20°C
Dielectric Strength			Min AC1.5KV
Spark Test			5.0KV
Insulation	Unaged	Tensile Strenght	16.5Mpa
		Elongation	500%
	Aged	Tensile Strenght	14.2Mpa(100°C 168h)
		Elongation	250%(100°C 168h)
Jacket	Unaged	Tensile Strenght	13.8Mpa
		Elongation	100%
	Aged	Tensile Strenght	11.7Mpa(100°C 168h)
		Elongation	50%(100°C 168h)
DC Resisitance Unbalance			Max 5%
Pair-to-Ground Capacitance Unbalance			Max 3300pF/km
Characteristic Impedance			100+/-150HM
Nominal Velocity of Propagation(%)			67~69
Propagation Delay			Max 536ns/100m
Delay Skew			Max 45ns/100m

Electrical & Physical Characteristics(RG6)

Operating Temperature Range		- 20°C + 70°C	
Conductor Resistance		Max 98 ohm/km at 20°C	
Dielectric Strength		Min AC2.0 KV	
Jacket	Unaged	Tensile Strenght	13.8Mpa
		Elongation	100%
	Aged	Tensile Strenght	11.7Mpa(100°C 168h)
		Elongation	50%(100°C 168h)

Marking:

STRUCTURED CABLE PRODUCTS --- HNC-18 --- (UL) C(UL) E198134 CM SCP3
3XHNCPROPLUS + FOR CAT6 23AWG UTP + 1XRG6/U QUAD SHIELD COAX CCS (BUNDLED)
CE EU RoHS EC ZONE/DEVICE A B C D E 0 1 2 3 4 5 6 7 8 9 XXX M

Packaging:

Approx.Wight(kg)	Approx.Dimension(mm)	Package	Packages per pallet
42.8	55X38X25	500ft/Spool	8

Performance-1

ITEM Frequency	Attenuation Max (dB/100m)		NEXT Min (dB)		PS NEXT Min (dB)		ACR Min (dB)	
	Standard	SCP	Standard	SCP	Standard	SCP	Standard	SCP
1	2	1.9	74.3	80.3	72.3	76.6	72.3	78.4
4	3.8	3.7	65.3	75.6	63.3	74.2	61.5	71.9
8	5.3	5.1	60.8	66	58.8	65.1	55.5	60.9
10	6	5.8	59.3	67.6	57.3	65.9	53.3	61.8
16	7.6	7.4	56.2	70.8	54.2	67.2	48.6	63.4
20	8.5	8.2	54.8	71.9	52.8	69.1	46.3	63.7
25	9.5	9.1	53.3	62.3	51.3	60.8	43.8	53.2
31.25	10.7	9.9	51.9	68.7	49.9	67.1	41.2	58.8
62.5	15.4	15	47.4	59.6	45.4	58.3	32	44.6
100	19.8	18.8	44.3	60	42.3	58	24.5	41.2
200	29	27.4	39.8	57.5	37.8	56	10.8	30.1
250	32.8	29.4	38.3	55.8	36.3	54.1	5.5	26.4
300	36.4	33.3	37.1	54.2	35.1	53.4	0.7	20.9
400	43	38.6	35.3	53.8	33.3	52.1	---	---
500	48.9	43.9	33.8	51	31.8	49.3	---	---

Performance-2

ITEM Frequency	RL Min (dB)		ELFEXT Min (dB)		PS ELFEXT Min (dB)		PSACR Min (dB)	
	Standard	SCP	Standard	SCP	Standard	SCP	Standard	SCP
1	20	23.6	67.8	75.6	64.8	73.3	70.3	74.7
4	23	23.9	55.8	61.3	52.8	60.1	59.5	70.5
8	24.5	30	49.7	55.7	46.7	54.8	53.5	60
10	25	28.5	47.8	55.2	44.8	53.2	51.3	60.1
16	25	28.2	43.7	49.7	40.7	48.1	46.6	59.8
20	25	27.8	41.8	48.1	38.8	46.2	44.3	60.9
25	24.3	27.5	39.8	45.9	36.8	45	41.8	51.7
31.25	23.6	24.9	37.9	42.7	34.9	41.7	39.2	57.2
62.5	21.5	24.1	31.9	39.4	28.9	37.4	30	43.3
100	20.1	23.5	27.8	35	24.8	33.2	22.5	39.2
200	18	23.2	21.8	32.8	18.8	30.2	8.8	28.6
250	17.3	21.5	19.8	30.7	16.8	27.7	3.5	24.7
300	16.8	20.8	18.3	26.5	15.3	25.4	---	---
400	15.9	18.9	15.8	23.4	12.8	22.1	---	---
500	15.2	18.6	13.8	19.5	10.8	18.7	---	---

Performance

ITEM	Attention MAX	
Frequency	DB/100M	
5	2.66	
50	5.25	
200	10.5	
400	14.11	
700	18.5	
1000	22.97	
1200	25.5	
1800	32	
2200	36	
2500	39	
3000	44.5	