




--	--	--	--

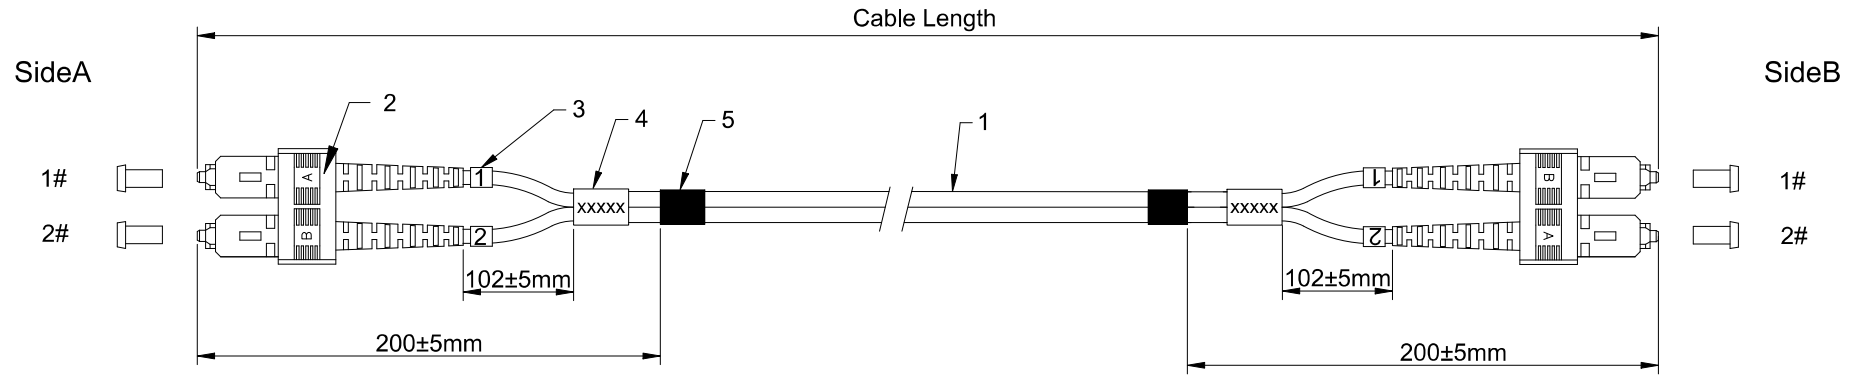

Notes:

1. Width: 25mm, Length: 30mm.
2. P/N: LYNN Part Number
3. Bar Code: Code 128 Auto
Print: xxxxxxxzzzzzz
4. S/N: xxxxxxxzzzzzz, e.g. A083930000001.
X: manufacture location.
yyyyyy: Internal work order code.
zzzzzz: Incrementing serial code.

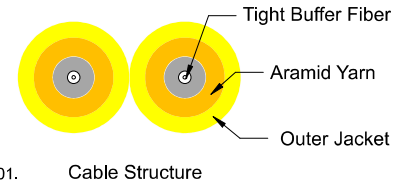

NOTES:
1.Insertion loss $\leq 0.2\text{dB}$
2.Return loss $\geq 55\text{dB}$

Cable Length	Tolerance
Cable Length<1M	5cm
1M≤Cable Length<15M	10cm
15M≤Cable Length<30M	15cm
Cable Length≥30M	Cable Length*1%

5	2		Black Shrinkage Tube				Requirements Of Cable							
4	2		Cable Label				Cable Type				Fiber Type	G657A1 Corning		
3	4		Cable Marker				Cable Diameter		2.0mm		Attenuation	@1310nm ≤ 0.4dB/km		
2	2		SC/UPC SM 2.0mm Duplex Connector(Blue Housing Blue Boot)+Clip				Cable Material		OFNR			@1550nm ≤ 0.3dB/km		
1	A/R		OD: 2.0mm,Singlemode 9/125 G657A1,Corning Fiber,Fiber Optic Cable,Duplex,OFNR,Color:Yellow				Tensile Strength	Long Term	70 N		Crush Resistance	Long Term		100 N/100mm
								Short Term	150 N			Short Term		
							Bending Radius	Static	10 D		Temperature Range	Storage Temperature		-20℃ ~ +70℃
		Dynamic		20D		Operating Temperature		-10℃~ +60℃						
ITEM	QTY	P/N	SPECIFICATION											
			DRAW	C. Brandenburg	DATE	22-07-2024	TITLE: Fiber Optic patch Cord SC/UPC-SC/UPC Duplex Singlemode							
			CHECK		APPROVED		CUSTOMER NO		DWG NO				REV	A
1			2			3	4			5		6		