

SITESHIELD STANDARD

All-In-One Outdoor Surveillance Solution
Deployment for Anywhere with Power

SS-KG2-STD-TLP

SiteShield Standard w/ 3Y Licenses Includes:

- 1x Enclosure System and Accessory Built-in Thermostat Heater, Fan and 4G Router
- 1x 4CH NVR w/2TB HDD
- 1x 4MP 2.7-13.5mm Varifocal Turret Camera
- 1x 4MP 8-32mm License Plate Recognition Camera
- 3Y SiteShield Management License include Core AI for All Cameras in SiteShield, the SiteShield Add-on Module License (Remote Power Control, Virtual Guard Dashboard) and Warranty



SIM Carriers



T Mobile

verizon

FIRSTNET
Built with AT&T

AVAILABLE SKUS

SKU NUMBER	CAMERA OPTION
SS-KG2-STD-TLP	1x 4MP VF Turret Camera 1x 4MP LPR Camera

CAMERA OPTIONS

FEATURE	Bullet Camera	LPR Camera
Image Sensor	1/3" 4MP 16:9 Progressive Scan CMOS	1/1.8", 4.0 megapixel, progressive scan, CMOS
Lens	2.7~13.5 mm zoom lens	Focal Length: 8-32 mm
Minimum Illumination	Color: 0.002 Lux (F1.2, AGC on); 0 Lux with IR on; IR-cut filter with auto switch	Color: 0.002 lux (F1.7); 0 lux with IR on
Video Compression	Ultra 265, H.265, H.264, MJPEG	Ultra 265, H.265, H.264 (Baseline profile, Main Profile, High Profile); ROI: Up to 8 areas
Resolution & Frame Rate	Main Stream: 2688*1520 @ 30 FPS Sub Stream: 1280*720 @ 30 FPS Third Stream: 720*576 @ 30 FPS	Main Stream: Up to 4MP(2688x1520) ,Max 30fps Sub Stream: Up to 720P (2560*720), Max 30fps Third Stream: Up to D1 (720x575), Max 30fps
Shutter	IR-cut filter with auto switch (ICR)	Auto/Manual, shutter time: 1/30~1/100000 s
IR Range	IR: 850nm, Up to 40m (131ft) IR range	IR LED Range: Up to 50m (164ft); 850nm
Image Processing	120 dB wide dynamic range (WDR); 2D & 3D digital noise reduction; defog	WDR: 120 dB; S/N: >56dB; Noise reduction: 2D/3D;

SPECIFICATIONS

SS-KG2-STD-TLP

GENERAL

Dimensions (HxWxD) 23.8" x 19.1" x 10.4" (605 x 485 x 265mm)

Weight 40lbs(without camera)

Working Environment -25°C~+ 55°C (-13°F~+131°F), Humidity ≤ 90% RH (non-condensing)

Rating NEMA3R

POWER

Power AC110V
Power consumption: ~64W(without camera)

Power Interface Cable Conduit Connector

HEAT AND FAN

Heat Heater Capacity: 150W
Heater turn on at 59°F(15°C)

Fan MTBF: 10 years
Fan turn on at 86°F(30°C)

NETWORK (CELLULAR)

Standard and Band LTE FDD: B1/B3/B5/B7/B8/B20/B28
B1/B2/B3/B4/B5/B7/B8/B28 (Optional),
B2/B4/B5/B12/B13/B17/B66/B71 (Optional)
LTE TDD: B38/B39/B40/B41
HSPA+/HSUPA/HSDPA/WCDMA/UMTS 2100
/1900/900/850MHz
EV-DO: BC0
CDMA 1x: BC0
EDGE/GPRS/GSM 850/900/1800/1900MHz

Antenna Interface Cellular: 2 * Standard SMA female antenna interface, characteristic impedance: 50 Ω

SIM/UIM Slot Standard drawer-type user card interface

VIDEO RECORDER

Video Inputs 4

Included HDD 2TB

PoE Plug and Play 4 Ports; IEEE 802.3af/ at; 54W Max Total


MOUNT OPTIONS Pole Mount


3.9 into 11.8 in dia Stainless Steel Adjustable Clamp x4 (Included)



MOUNT OPTIONS Wall Mount

M8 x 80
(Not included in Product)



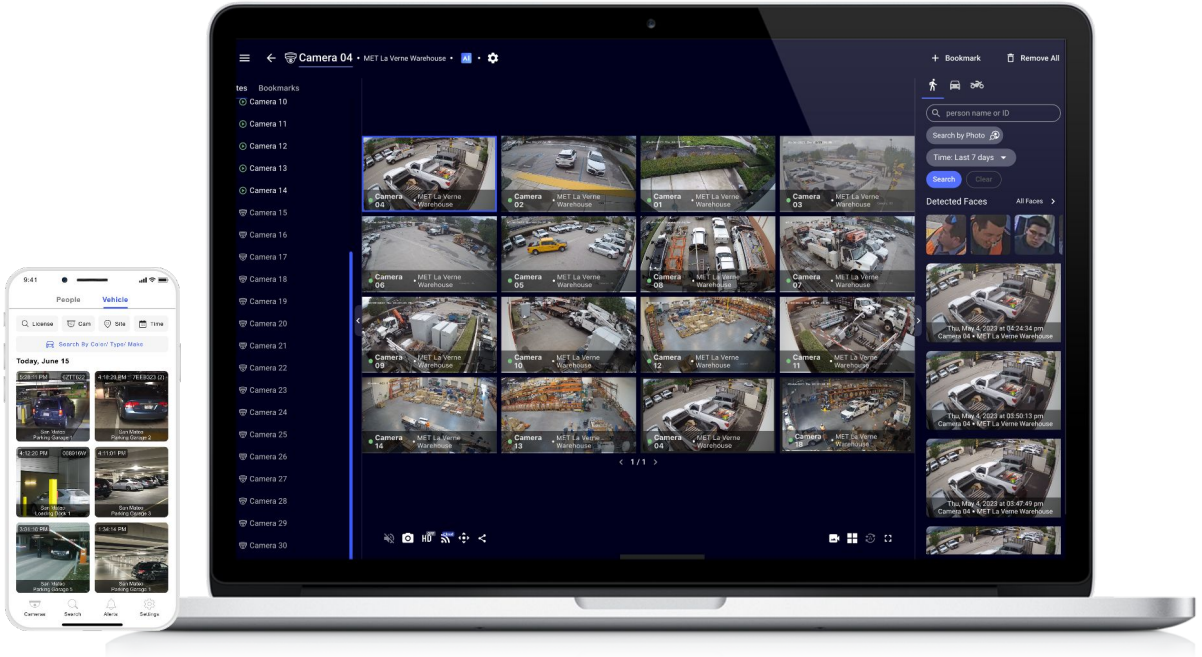

KEY FEATURES



Receive Instant Smart Alerts for Intruders/Trespassers/Person of Interest/Vehicle of Interest via SMS/Email/Push Notifications

Remote Live Stream Monitoring



- Remote Live Streaming up to 16 Cameras in HD
- Bookmark and Auto-Cycle Play for Live Monitoring



Share Live Camera Streams With First Responders



Find Events Fast with Smart Video Search and Archive/Share for Future Reference



View Live Footage From any Desktop / Mobile Device



Flexible Hybrid Storage Locally or on the Cloud