


2MP, STARLIGHT, WDR, LICENSE PLATE RECOGNITION BULLET

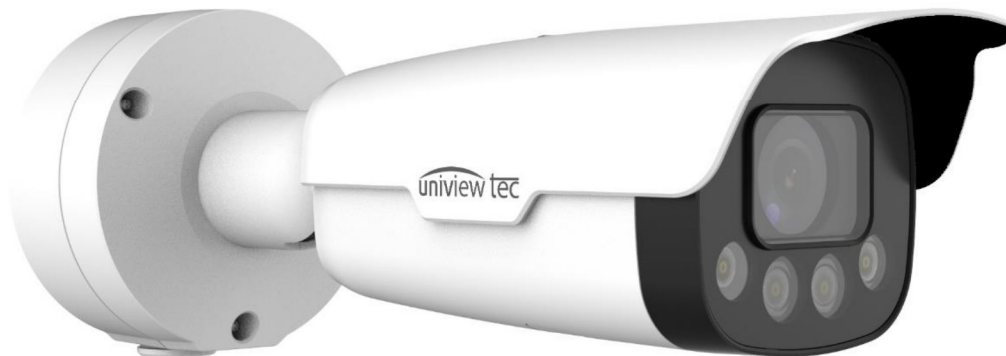

LPR Bullet

IPLPRB2447MX

Optics

- > Starlight optical sensor and integrated IR illuminator produce clear images in night environments and reduce light pollution
- > 4 LED IR illumination beads provide up to 50m illumination
- > 2MP industrial-grade sensor delivers 1920 x 1080 images
- > Motorized zoom lens enables flexible focal length adjustment and easy installation
- > Automatic gain control, white balance, and WDR for various light conditions

Compression

- > Automatic gain control, white balance, and WDR for various light conditions
- > Up to 1080P @ 60fps image collection format
- > 1 image stream, 3 video streams.
- > Up to 1080P @ 60fps live video streams.
- > Advanced H.265 encoding technology improves compression efficiency.
- > Custom OSD allows various vehicle information to be overlaid on the video image

www.univiewtechnology.com

Functions

- > Built-in vehicle & license plate recognition algorithm can recognize standard license plates of multiple countries.
- > Supports capturing vehicle head only.
- > Supports allowlist and blocklist configuration.
- > Supports vehicle access control when connected to a barrier.
- > Supports Micro SD cards of up to 128GB.
- > Supports Automatic Network Replenishment (ANR), the camera can automatically store video to its SD card in case of network disconnection.
- > Supports audio acquisition and intercom.

Network

- > Network auto-adaptability ensures fluent live video in relatively bad network conditions such as packet loss.
- > Supports SNMP.
- > Supports UNP for NAT traversal between public and private networks.
- > Supports integration by the third party via SDK or HTTP.

Network Security

- > Supports authorized user access by password. Weak password detection and account lock-up when failed login attempts reach the upper limit enhance password security.
- > Supports HTTPS.
- > RTSP authentication prevents unauthorized video stream requests.
- > IP address filtering prevents illegal access from untrusted IP addresses.
- > Gateway ARP protection prevents MAC address spoofing.

Structure


- > Fully Adheres to National Defense Authorization Act (NDAA) Guidelines
- > Supports DC 12V, and PoE (802.3at) power supplies.
- > Cast aluminum body offers excellent heat dissipation.
- > 3-axis mounting bracket for various installation scenarios.
- > Junction box for cabling.
- > IP67 and IK10 ratings
- > Supported by uniview tec Guard Station Client Software and Guard Viewer Mobile App's for iPhone and Android Devices

Specifications

Camera	
Sensor	1/2.8" 2MP CMOS
Focal length	4.7 to 47mm, motorized zoom
Shutter	Auto / Manual, range: 1/25 to 1/100000 s
Minimum illumination	0.001lux (F1.6)
Image	
Image collection format (fps)	1080P @ 25 (default), 1080P @ 30, 1080P @ 50, 1080P @ 60
Resolution	Main stream: 1080P (default), 720P, D1 Sub stream: 720P (default), D1, 2CIF, CIF Third stream: D1 (default), 2CIF, CIF
Frame rate (fps)	60, 50, 30, 25 (default), 22, 20, 18, 16, 15, 12.5, 10, 8, 6, 5, 4, 3, 2, 1
Video compression	H.264 (default), H.265
ROI (Region of Interest)	Supports up to 8 regions
Video OSD	Supports 8 overlay areas and allows contents including date, time, date & time, zoom ratio, custom contents
Image OSD	Supports 8 overlay areas and allows contents including time, license plate number, device ID, camera ID, allowlist, image authentication ID, custom contents (3 items), location
Smart	
Application scenario	Vehicle speed $\leq 30\text{km/h}$ (18.5mph); Supports simultaneous application to entry / exit scenes
Vehicle detection mode	Video (default) or inductive loop
Capture vehicle head only	Support
License plate number recognition	Supports recognition of license plates with numbers and letters by default
List configuration	Supports allowlist and blocklist configuration, each list allows 20,000 items Supports import, export, add, and delete operations
Barrier opening policy	Open barrier only for the recognized vehicles Open barrier for all vehicles Open barrier only for vehicles on the allowlist Open barrier for vehicles not on the blocklist Configurable Boolean output ID
Storage	
Edge Storage	Supports ANR with a Micro SD card, up to 128GB
Structure	
Illumination	Built-in integrated illumination module, including 4 IR LEDs, 50m illumination distance, automatic on/off control
Sunshield	Long sunshield
Bracket	3-axis mounting bracket
Junction box	The camera comes with a junction box for storing cable

Interface	
Network interface	1 × 10M/100M RJ45
Serial port	1 × RS485
Boolean output	1 relay output, withstand voltage: AC 125V/0.3A, DC 30V/1A
Boolean input	2 inputs, supports level / Boolean, with max level up to DC 5V
Audio interface	1 × audio input, 1 × audio output
Storage interface	1 × Micro SD card slot
General	
Power supply	DC12V + 25% - 10%
	Max. power consumption: 20W
	Supports PoE (802.3at, class 4)
Dimensions (L × W × H)	386 x 126 x 130mm (15.2 x 5 x 5.1")
Weight	2kg (4.4lbs)
Operating environment	-40°C ~ 60°C , (-40°F ~ 140°); ≤90% Relative Humidity
Ingress protection	IP67, IK10

Dimensions

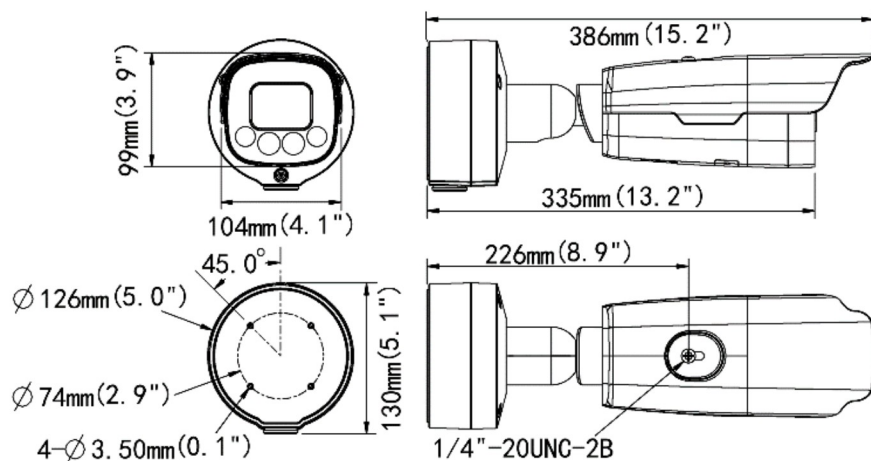

Accessories

See Camera Accessories Guide