

C3-400-PRO



C3-200-PRO

## C3 Pro-Series


### IP-Based Access Control Panel

C3 Pro Series is a next-generation series of panels with advanced access control features including anti-passback, first-card opening, multi-card opening, duress password entry, embedded card verification, and real-time PUSH protocol communication support.



#### Choice of Readers:

Full range of Wiegand readers supported. Full range of readers including but not limited to: ZKTeco prox, HID prox, HID iClass, HID Seos, Fingerprint, Face, Palm, Bluetooth and QR Code.



#### Door Control and More:

Along with relay contacts for controlling door locks, easily programmable auxiliary relays can be used for additional control and interface to lights, alarms, annunciators, intrusion detection panels, or even extra locking devices or gate controllers.



#### Communication:

C3 Pro panels support TCP/IP communication and install easily on your network.



#### Options:

C3 Pro panels come in two configurations to suit project needs and reduce the cost of unused capacity. 2-door and 4-door models can be mixed and matched in an optimized system architecture.



#### Lowest Total Cost of Ownership:

C3 Pro panel firmware can be upgraded in the field. New controller features can be loaded without any advanced tools, extending and expanding the value of your investment.



#### Built-In Advanced Access Control:

Anti-Pass-back, First-Card Opening, Multi Card Opening, Duress Password Entry, and Auxiliary Input/Output Linkages are built into the firmware.



#### Capacity:


30,000 users and 100,000 events. Panel can be backed up in real time on to an optional SD card. All data is preserved on the panel if power is lost. Panel continues operating even when network connection is interrupted.



#### For Software Developers:

SDK is available for integrators and OEM's to integrate the C3 Pro panels with their existing security or personnel management applications. Upon request, ZKTeco can also customize C3 Pro firmware to meet any custom requirements.

## TYPICAL INSTALLATION:

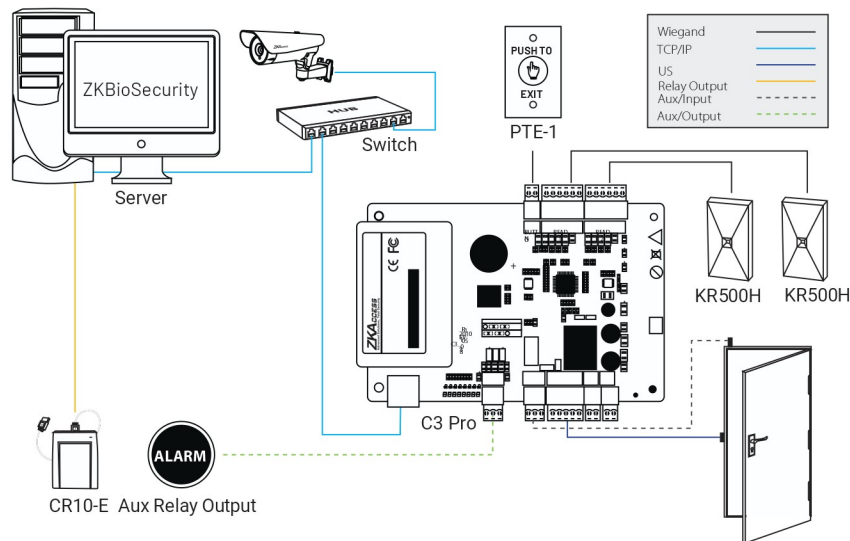

## OPTIONAL ACCESSORIES:



KR500H



KR500BT



QR502-V



PTE-1



Prox Card



Fob



ZKey App  
Free Mobile app to manage user  
QR & BT credentials

## SPECIFICATIONS:

### C3-200-PRO

### C3-400-PRO

|                                  |                                                                |                                                               |
|----------------------------------|----------------------------------------------------------------|---------------------------------------------------------------|
| Software Compatibility Number of | ZKBioSecurity Software, only                                   | ZKBioSecurity Software, only                                  |
| Doors Controlled Number of       | 2 Doors                                                        | 4 Doors                                                       |
| Readers Supported                | 4 (Wiegand readers)                                            | 4 (Wiegand readers)                                           |
| Types of Readers                 | Wiegand                                                        | Wiegand                                                       |
| Number of Inputs                 | 6 ( 2 for Exit button, 2 for Door status, 2 for Aux)           | 12 (4 for Exit button, 4 for Door status, 4 for Aux)          |
| Number of Outputs                | 4 ( 2-from C Relay for Lock and 2-form C Relay for Aux Output) | 8 (4-form C Relay for Lock and 2-form C Relay for Aux Output) |
| User Capacity                    | 30,000                                                         | 30,000                                                        |
| Log Capacity                     | 100,000                                                        | 100,000                                                       |
| Weight                           | 10 lbs. (4.5 kg)                                               | 10 lbs. (4.5 kg)                                              |
| Communication                    | TCP/IP                                                         | TCP/IP                                                        |
| Enclosure                        | Powder Coated Aluminum                                         | Powder Coated Aluminum                                        |
| Mounting                         | Wall Mount                                                     | Wall Mount                                                    |
| Recommended Power                | 12V DC, 1.5A                                                   | 12V DC, 1.5A                                                  |
| Dimensions (Bundle)              | 15 × 3.15 × 11 inches                                          | 15 × 3.15 × 11 inches                                         |
| Dimensions ( Board)              | 6.3 × 4.17 inches                                              | 6.3 × 4.17 inches                                             |



1600 Union Hill Road Alpharetta, GA 30005  
Phone: (862) 505-2101 | Fax: (862) 204-5906 | info@zktcoua.com | www.zktcoua.com

© Copyright 2023. ZKTeco Inc. ZKTeco Logo and ZKTeco USA Logo have registered trademarks of ZKTeco or a related company.  
All other product and company names mentioned are used for identification purposes only and may be trademarks of their respective owners.  
All specifications are subject to change without notice. All rights reserved.