



Quick Setup Guide for Partner Portal:


Adding customers, configuring Bridge Channels for recording, groups, and users

Contents

Logging into Partner Portal.....	3
Adding Customers	4
Adding Bridge to Customer's Account.....	7
Adding Cameras to Cloud	9
Create Recording Schedule	12
Create a Camera Group.....	14
Adding Users	16


Logging into Partner Portal

- Open a web browser and go to the following URL:
<https://partner.sgcloud.cloud/auth/login>.
- Enter your credentials provided by Speco and click the Login button.

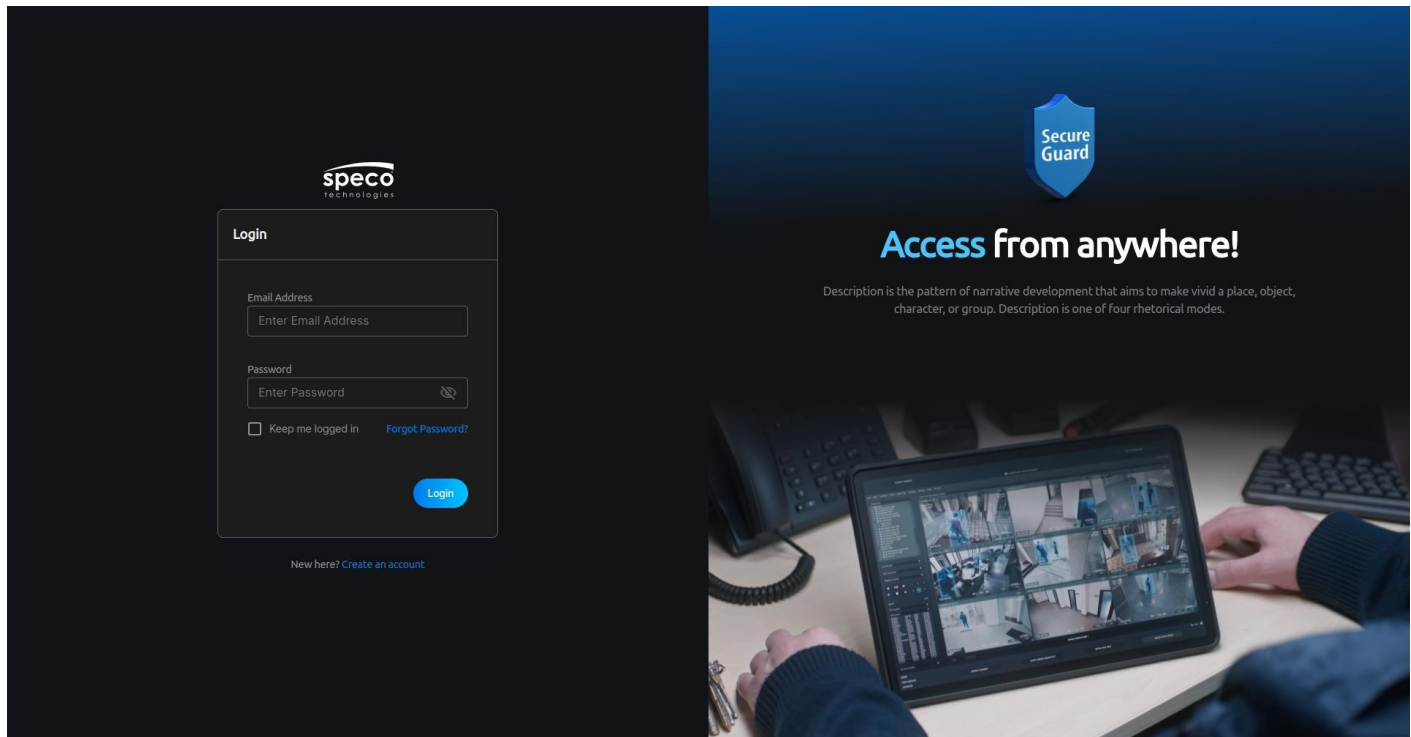


Adding Customers


When logged in, click the 'Customers' tab.

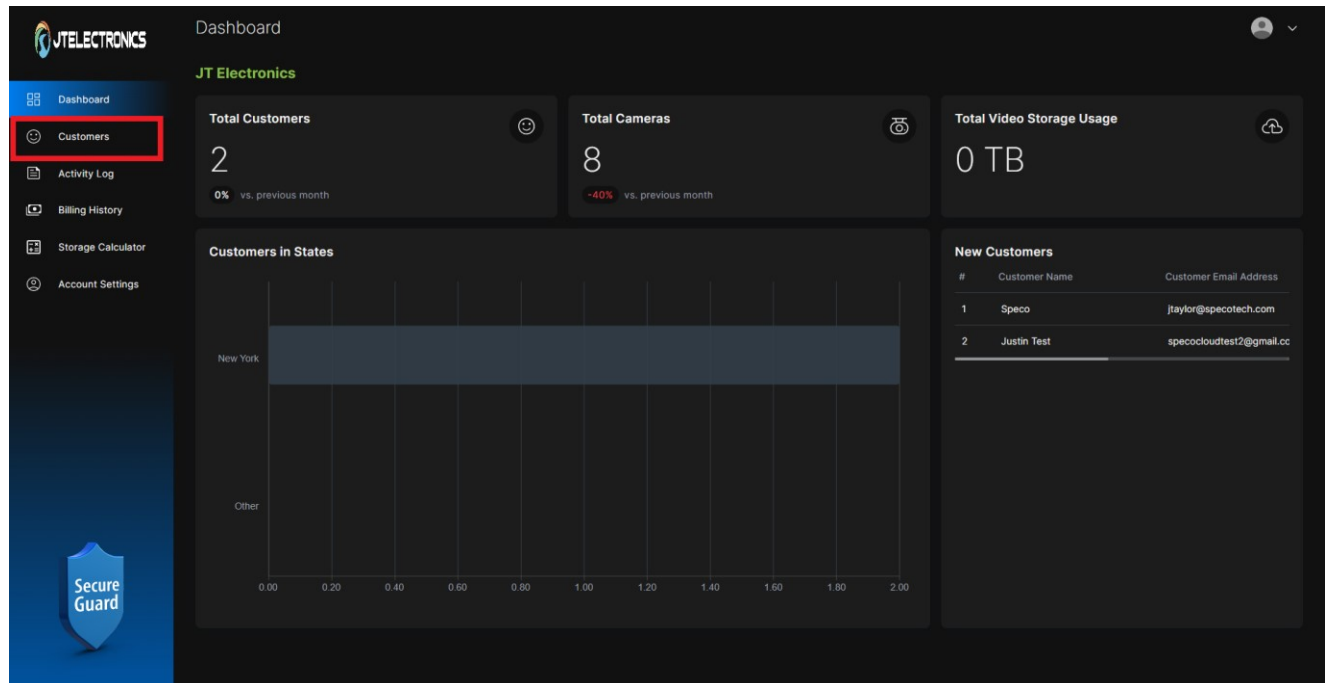

Click '+ Add Customer'

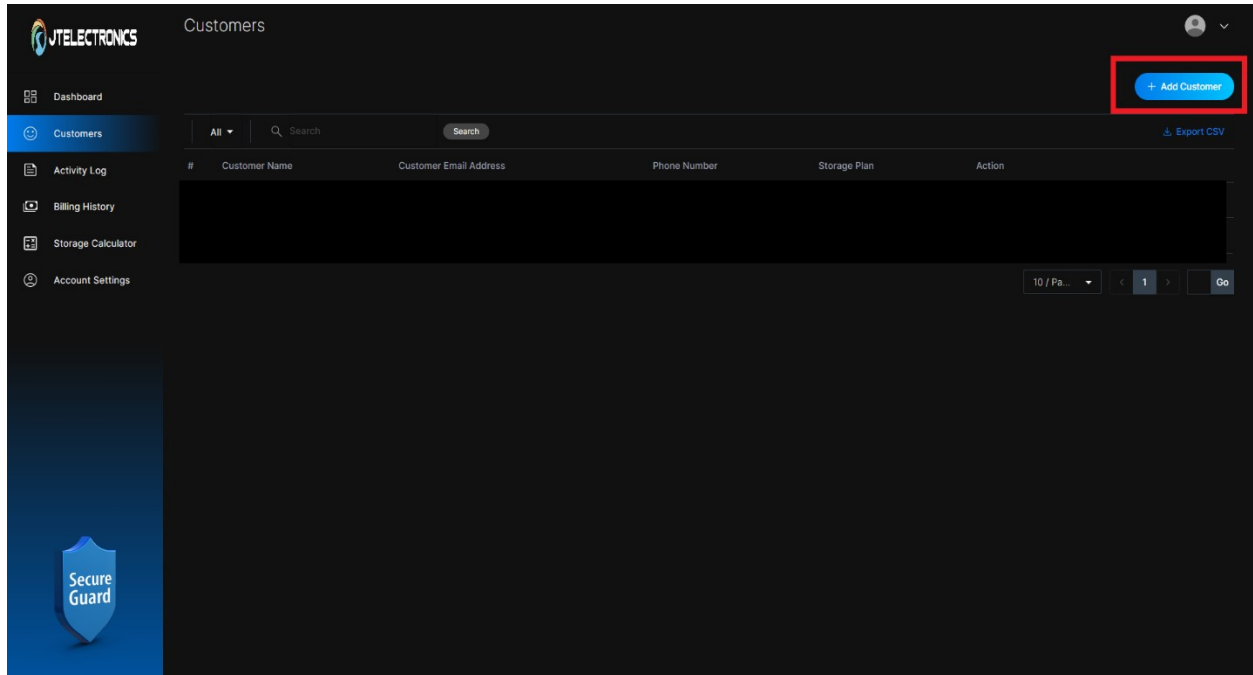

Enter customer's information and click 'Add Customer'

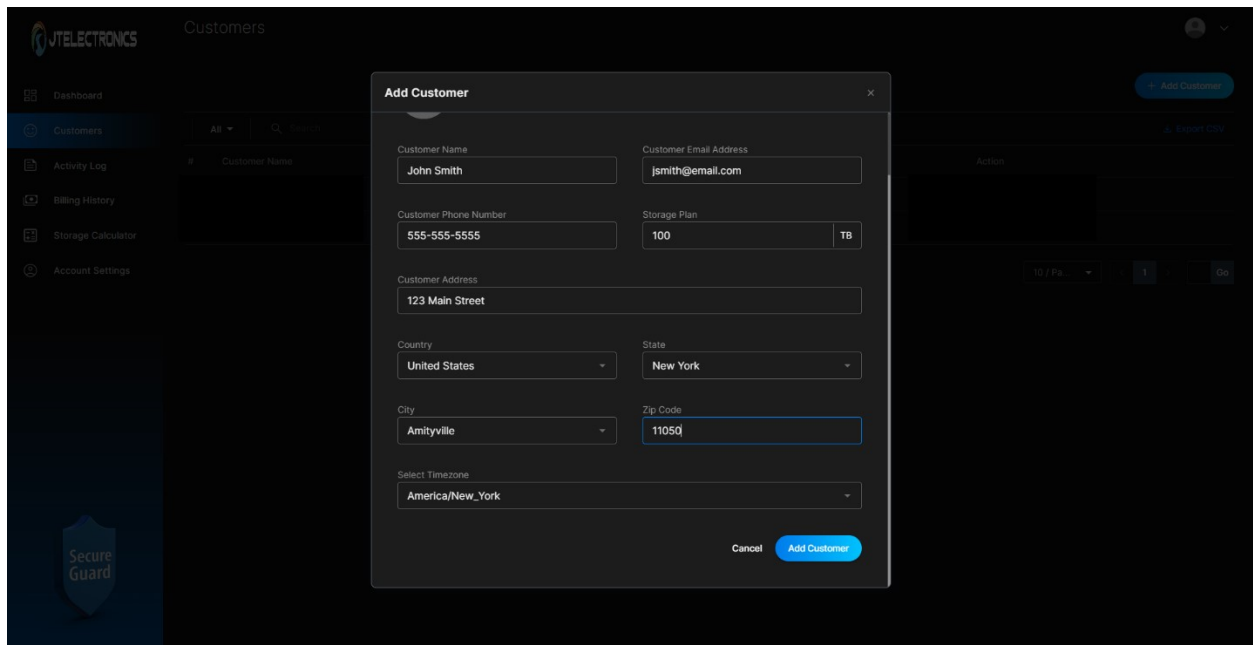

A confirmed message will display informing you that a registration e-mail has been sent to the customer. Click 'OK'.

The screenshot displays the 'Customers' management page in the JTELECTRONICS system. The interface features a dark theme with a sidebar on the left containing navigation links: Dashboard, Customers (active), Activity Log, Billing History, Storage Calculator, and Account Settings. The main content area shows a table of customers with columns for #, Customer Name, Customer Email Address, Phone Number, Storage Plan, and Action. A single customer, John Smith, is listed with email jsmith@email.com and phone number 555-555-5555. A modal dialog box is centered on the screen, displaying a green checkmark icon and the text 'Success! Customer has been Added successfully An email has been sent to the customer to set password.' with an 'OK' button. The top right of the page includes a '+ Add Customer' button and an 'Export CSV' link. A 'Secure Guard' shield icon is visible in the bottom left corner.

JTELECTRONICS Customers

Dashboard + Add Customer

Customers All Search Export CSV

#	Customer Name	Customer Email Address	Phone Number	Storage Plan	Action
1	John Smith	jsmith@email.com	555-555-5555	100 TB (Active)	


10 / Pa... 1 Go

Success!
Customer has been Added successfully An email has been sent to the customer to set password.
OK


Secure Guard

Adding Bridge to Customer's Account

Click '>' to go to the Customer's configuration portal.

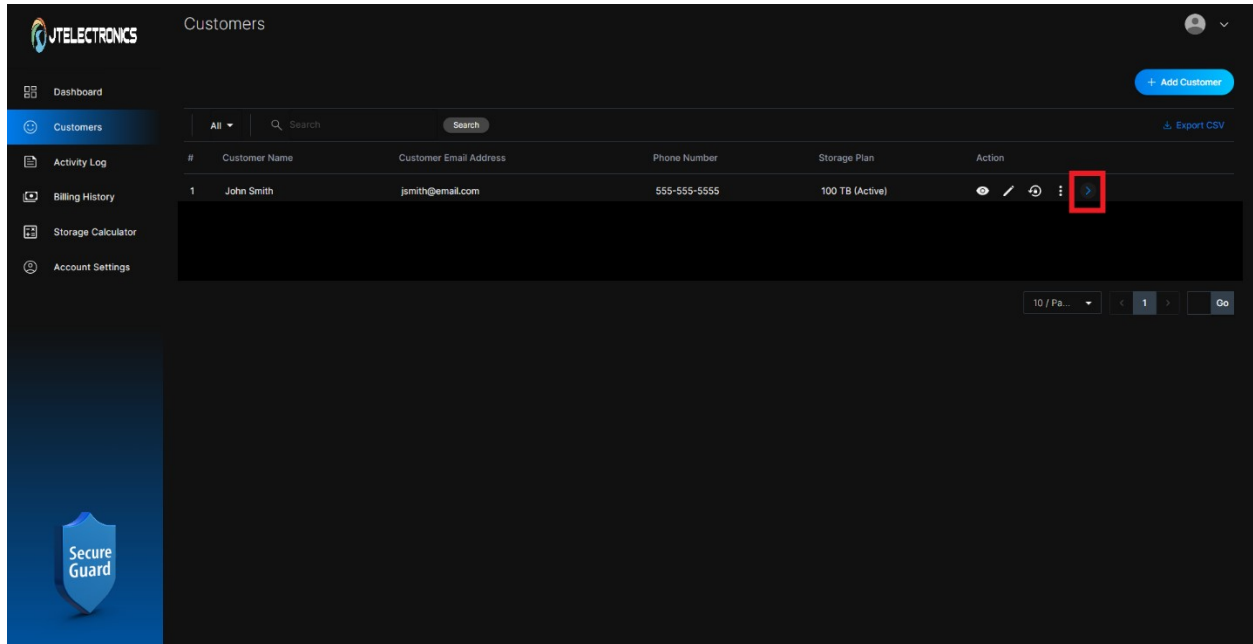

A new tab will open for the customer's configuration portal. Click '+ Add Bridge'.

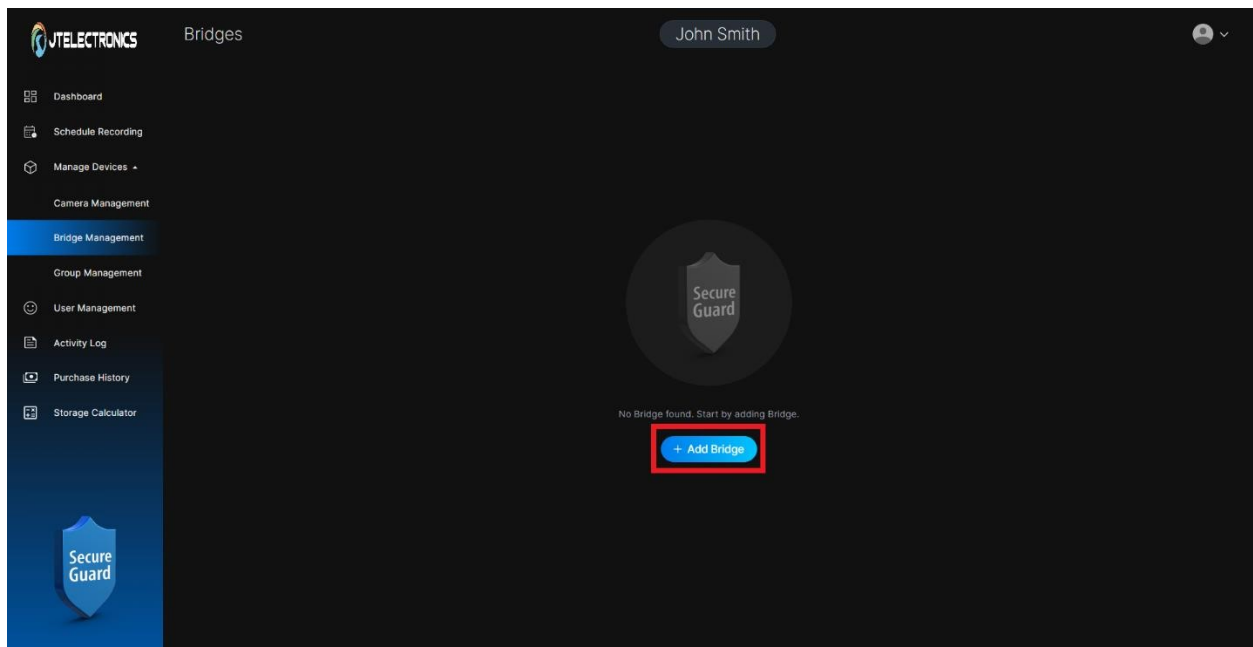

Enter Bridge information found in the System Config page of your SGBRIDGE's web portal. Please refer to the SGBRIDGE Quick Setup Guide to learn more. Once entered, click 'Add Bridge'

The screenshot shows the 'Add Bridge' modal in the JTELECTRONICS web portal. The modal is titled 'Add Bridge' and has a close button (X) in the top right corner. It contains the following fields:

- Name: John Smith Cloud
- Cloud ID: SGB37MWDDH5ROBY9
- Cloud Password: [masked]
- Remark: Building Bridge

There is a checkbox labeled 'Upload to cloud immediately' which is checked. At the bottom right of the modal, there are two buttons: 'Cancel' and 'Add Bridge'. The 'Add Bridge' button is highlighted with a red box.

The Bridge will be listed.


The screenshot shows the 'Bridges' page in the JTELECTRONICS web portal. The page has a sidebar with navigation options and a main content area. The main content area displays a table of bridges. The first row of the table is highlighted with a red box.

#	Bridge Name	Cloud ID	Created At	Health Status	Remark	Actions
01	John Smith Bridge	SGB37MWDDH5ROBY8	05/29/2024	Online	Building Bridge	[Icons]


At the bottom right of the table, there is a pagination control showing '10 / Page' and a 'Go' button.

Adding Cameras to Cloud


After adding your Bridge, click 'Camera Management' and click '+ Add Camera'.

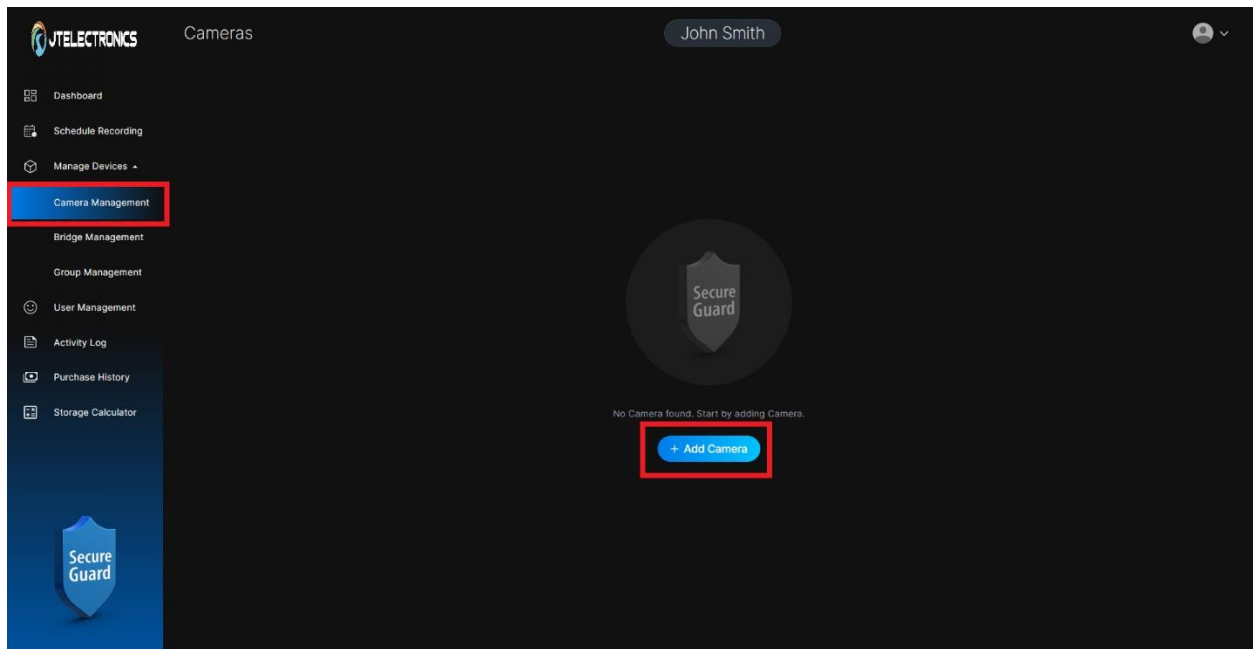


Click 'Next'

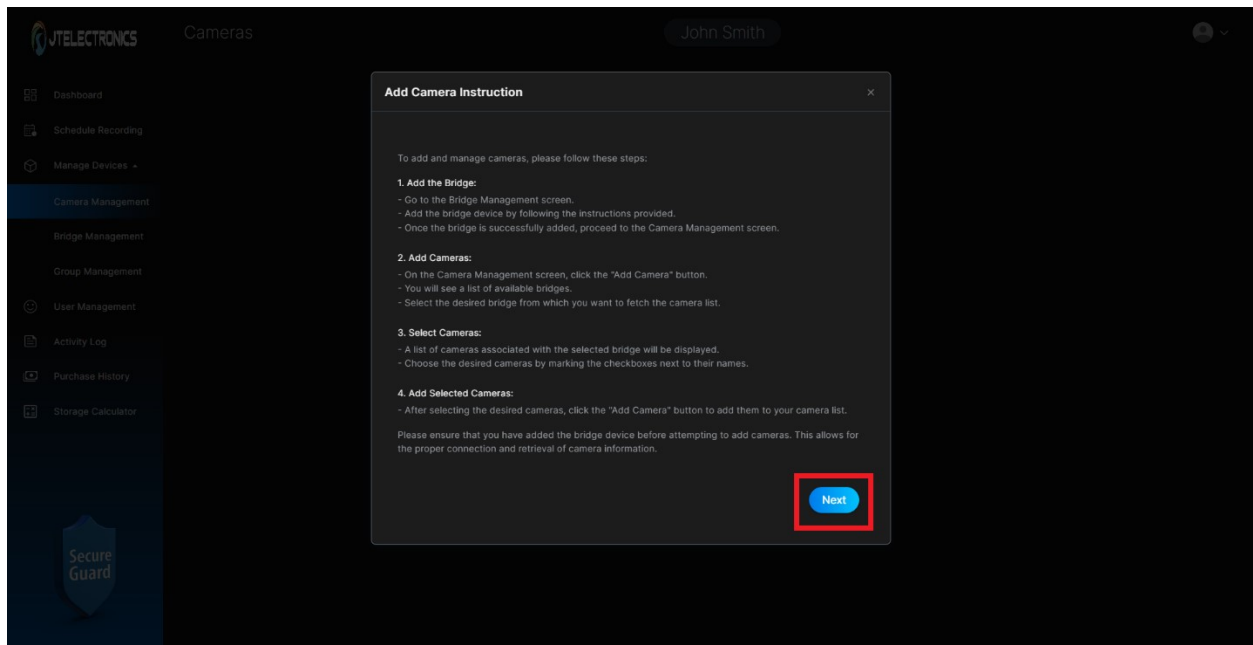

Select the Bridge you want to add channels from and click 'Next'.

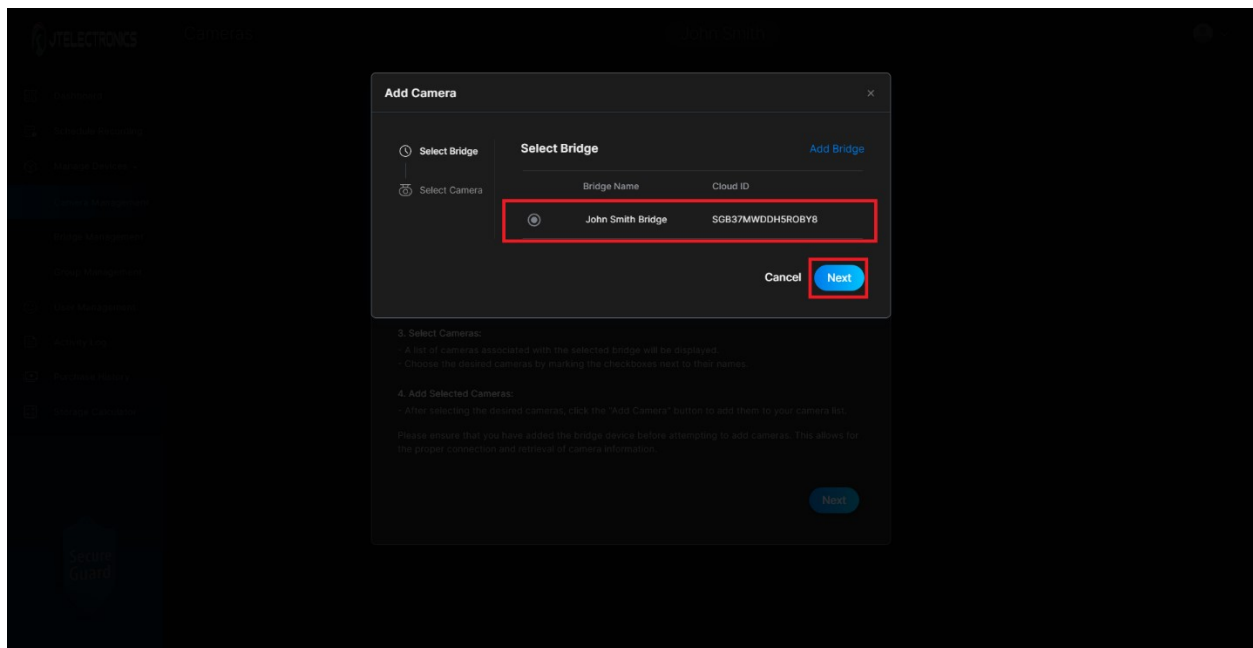

Select the cameras you want to record to the cloud and click 'Next'

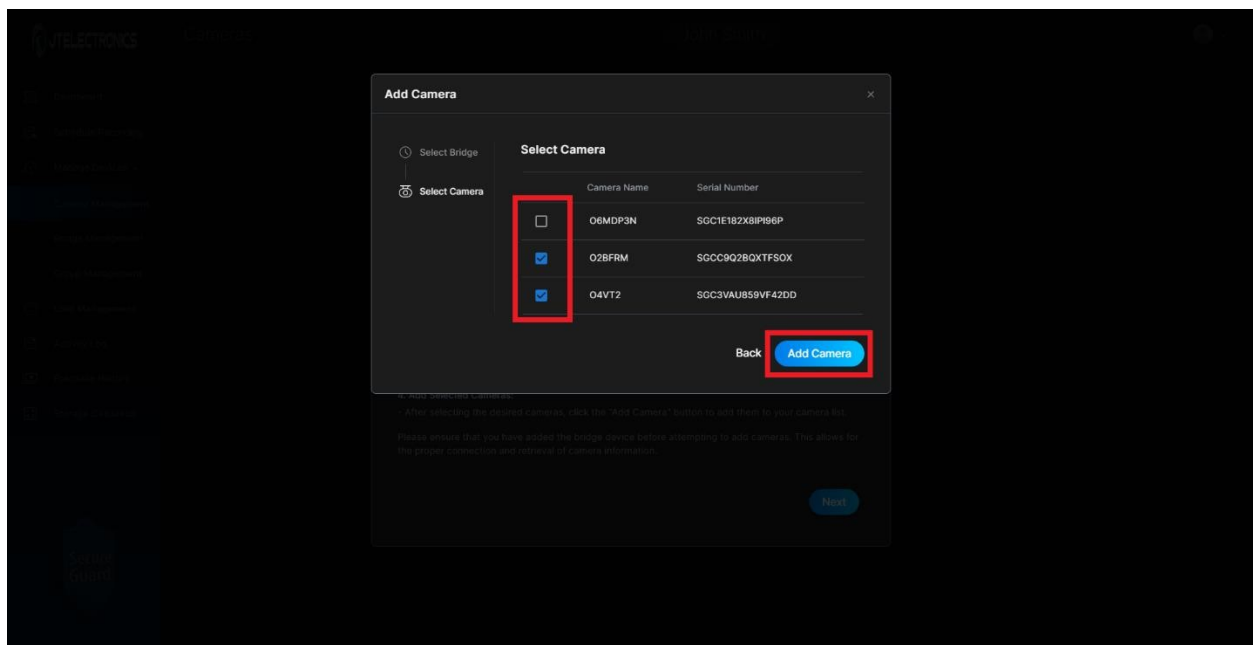

Cameras will be listed. **Cameras must be configured to H.264. If any channels are displaying H.265, change them to H.264.**

JTELETRONICS Cameras John Smith + Add Camera

[Dashboard](#)
[Schedule Recording](#)
[Manage Devices](#)
[Camera Management](#)
[Bridge Management](#)
[Group Management](#)
[User Management](#)
[Activity Log](#)
[Purchase History](#)
[Storage Calculator](#)


[Secure Guard](#)

#	Bridge Name	Camera Name	Stream Format	Serial Number	PTZ	Health Status	Actions
01	John Smith Bridge	O4VT2	H264	SOC3VAU859VF42DD	No	Online	View Edit Delete
02	John Smith Bridge	O2BFRM	H264	SGCC9Q2BQXTFSOX	No	Online	View Edit Delete


10 / Page < 1 > Go

Create Recording Schedule

Click 'Schedule Recording' and then click '+Add Schedule Recording'.

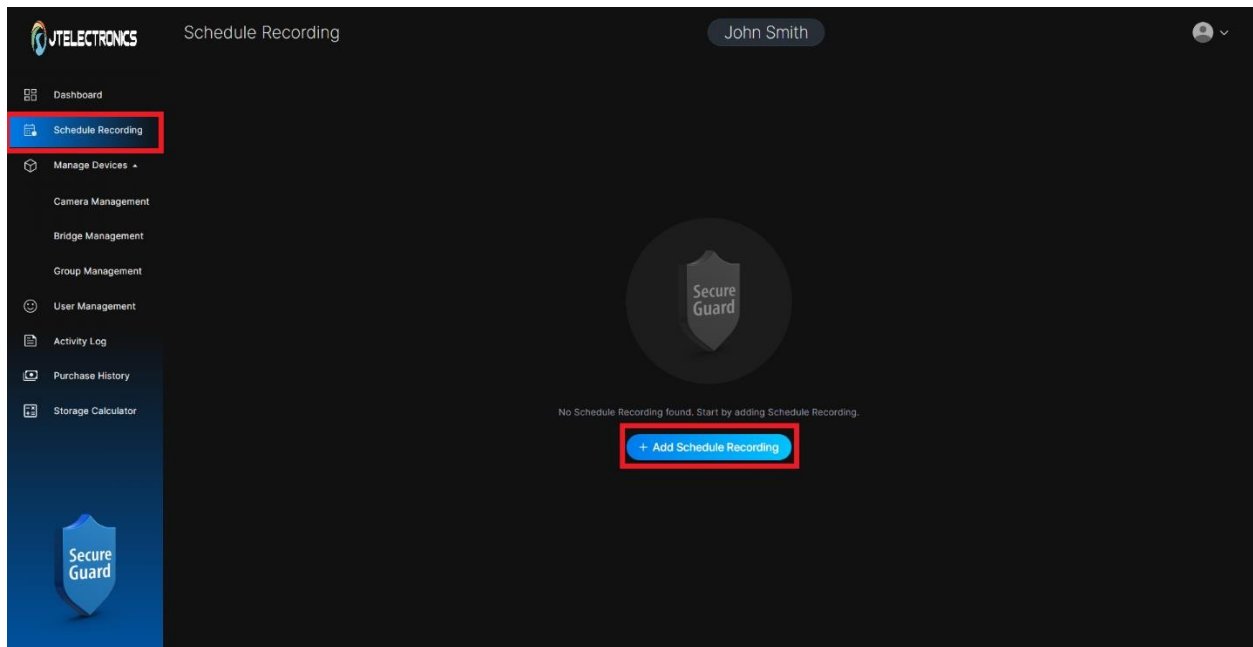

Give the schedule a name and select cameras that are to follow the schedule.

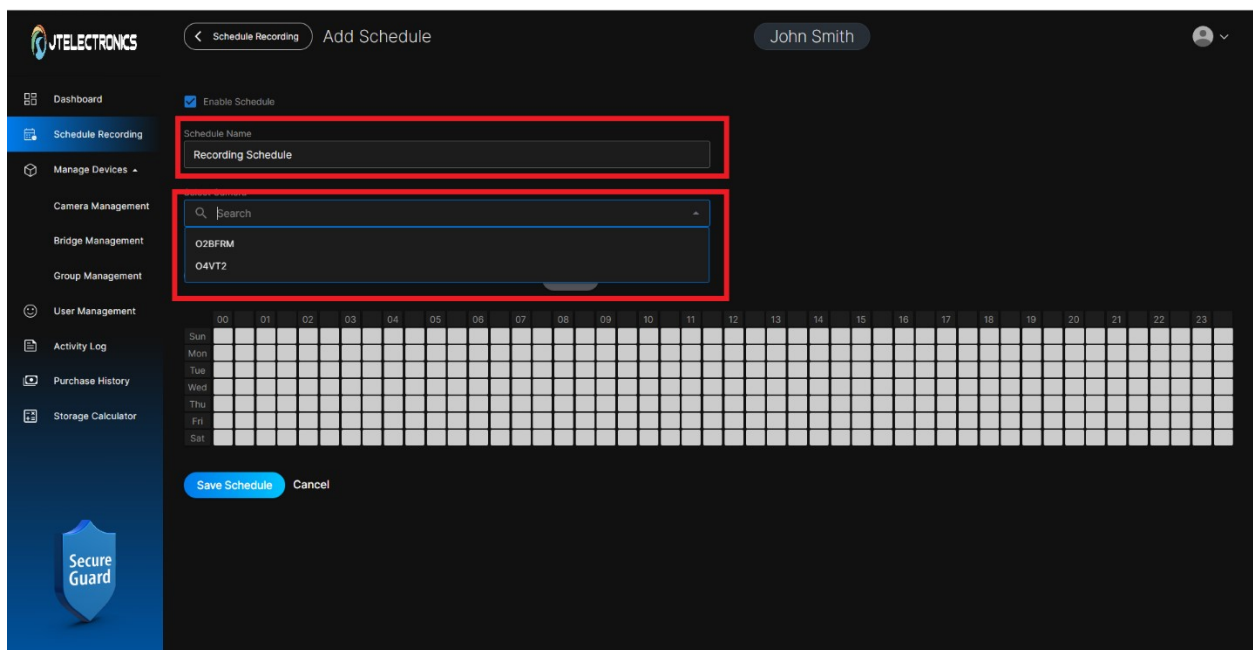

Fill in the schedule boxes for the days of the week and time blocks. You can select from Continuous, Motion, or Continuous and Motion. Once completed, click 'Save Schedule'

Dashboard

Schedule Recording

Manage Devices

Camera Management

Bridge Management

Group Management

User Management

Activity Log

Purchase History

Storage Calculator

Secure Guard

< Schedule Recording Add Schedule

John Smith

Enable Schedule

Schedule Name

Recording Schedule

Select Camera

O2BFRM X O4VT2 X Search

Recording Type

Continuous Motion Continuous And Motion Clear Clear All

Sun 00 01 02 03 04 05 06 07 08 09 10 11 12 13 14 15 16 17 18 19 20 21 22 23

Mon

Tue

Wed

Thu

Fri

Sat

Save Schedule Cancel

Schedule will be listed showing information entered.

Dashboard

Schedule Recording

Manage Devices

Camera Management

Bridge Management

Group Management

User Management

Activity Log

Purchase History

Storage Calculator

Secure Guard

Schedule Recording

John Smith

+ Add Schedule


All Cameras All Days Search for schedule name Search

#	Schedule Name	Camera	Day Name	Time Duration	Status	Action
1	Recording Schedule	O4VT2, O2BFRM	Sunday, Monday, Tuesday, Wednesday, Thursday, Friday, Saturday	168 hr	Enable	


10 / Page < 1 > Go

Create a Camera Group

Click 'Group Management' and click '+ Add Group'.

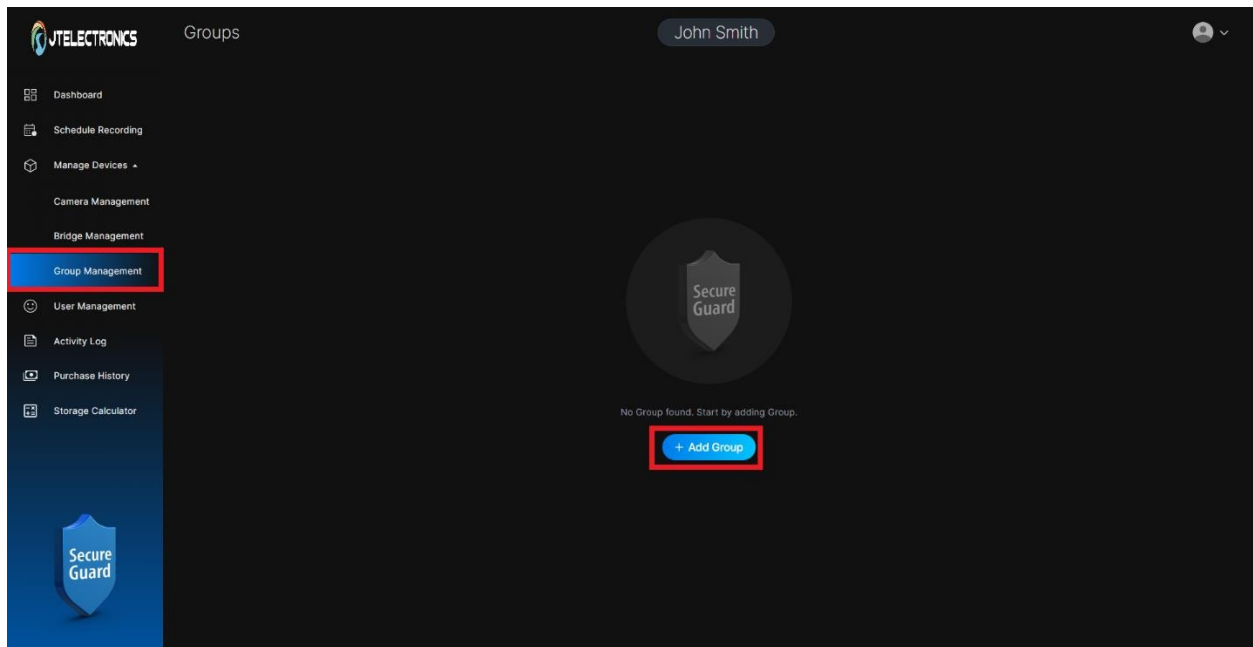

Enter a name for the group and select cameras.

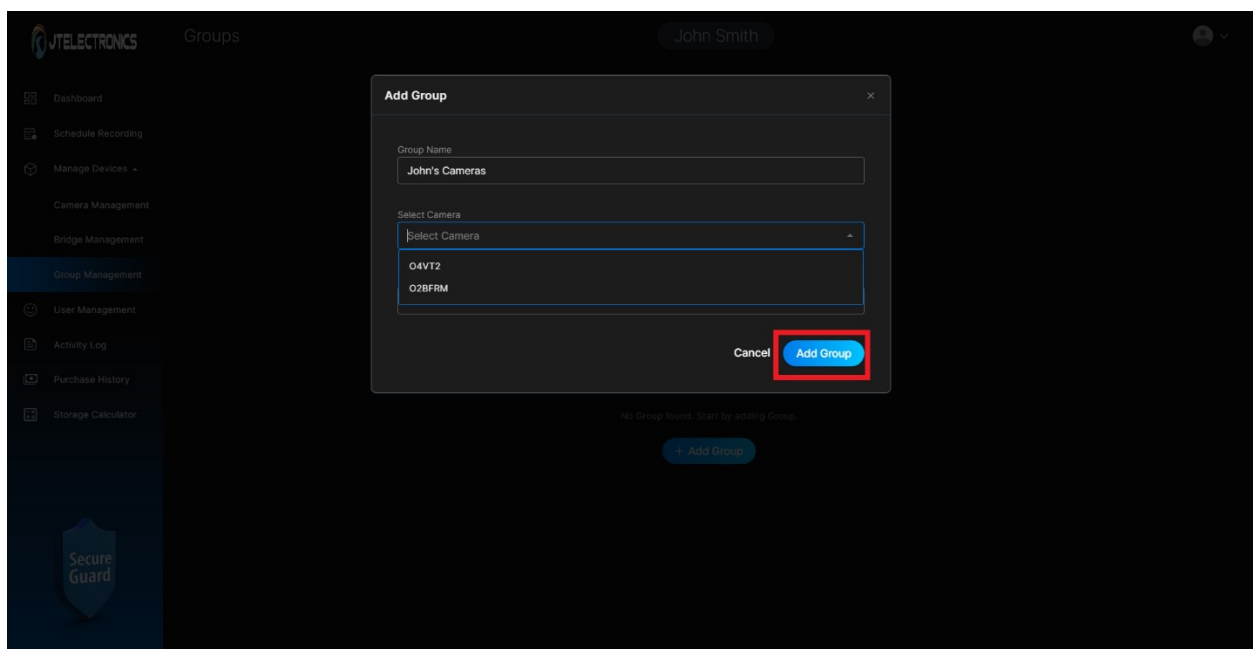

Group will be listed.


The screenshot shows the VTELECTRONICS Groups management interface. The sidebar on the left contains the following navigation items: Dashboard, Schedule Recording, Manage Devices (with a sub-menu arrow), Camera Management, Bridge Management, Group Management (highlighted in blue), User Management, Activity Log, Purchase History, and Storage Calculator. At the bottom of the sidebar is a 'Secure Guard' logo. The main content area is titled 'Groups' and shows a user profile 'John Smith' at the top right. Below the title is a search bar and an 'Add Group' button. A table lists the groups, with the first row highlighted by a red box:

#	Group Name	Cameras	Users	Actions
01	John's Cameras	2	0	


At the bottom right of the table, there is a pagination control showing '10 / Page', a dropdown arrow, a page number '1', and a 'Go' button.

Adding Users

Click 'User Management' and click '+ Add User'.

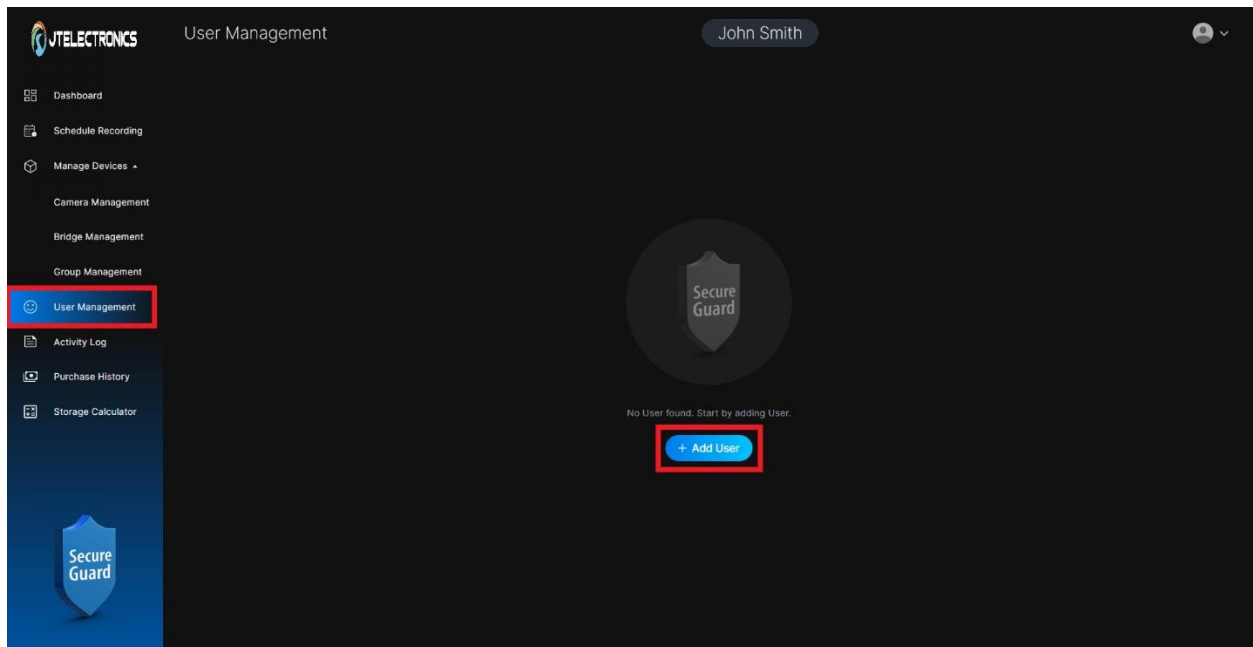

Enter user information, select camera group, and set privileges. Once completed, click 'Add User'

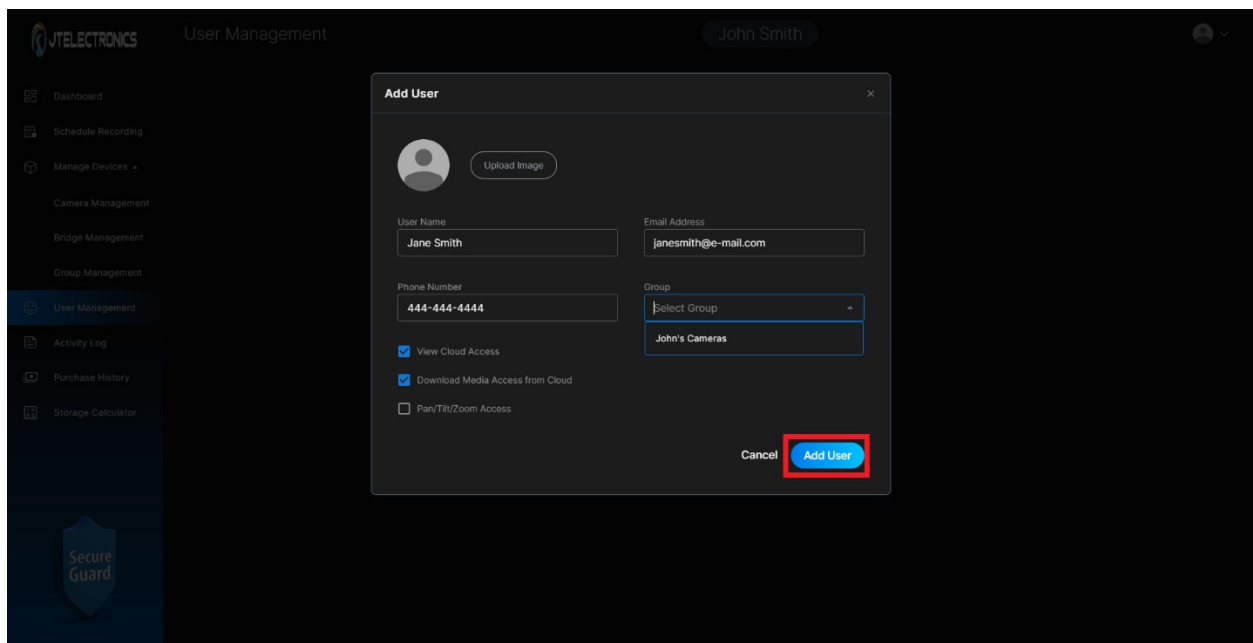

A confirmed message will display informing you that a registration e-mail has been sent to the user.

The screenshot displays the JTELECTRONICS User Management interface. On the left is a sidebar with navigation links: Dashboard, Schedule Recording, Manage Devices (expanded), Camera Management, Bridge Management, Group Management, User Management (selected), Activity Log, Purchase History, and Storage Calculator. At the bottom of the sidebar is a 'Secure Guard' shield icon. The main header shows 'User Management', a user profile for 'John Smith', and an '+ Add User' button. Below the header is a search bar and a table of users. The table has columns for #, User Name, Email Address, Phone Number, Group, and Actions. One user is listed: Jane Smith with email janesmith@e-mail.com and phone 444-444-4444. A modal dialog box is centered on the screen, displaying a green checkmark icon, the text 'Success!', and a message: 'User has been added successfully. Email containing password setup link has been sent to the user's email address.' An 'OK' button is at the bottom right of the modal. A pagination bar at the bottom right of the table area shows '10 / Page' and navigation controls.

#	User Name	Email Address	Phone Number	Group	Actions
01	Jane Smith	janesmith@e-mail.com	444-444-4444	-	