

Recessed Steel TV BOX™

For new or existing construction. Metallic, recessed combo boxes for power and/or low voltage for class 2 wiring of satellite or cable TV, speakers, etc.

CATALOG NUMBER	UPC/DCI/NAED MFG #018997	TRADE SIZE	DESCRIPTION	UNIT PKG	STD PKG	DIM A	DIM B	DIM C
TVBS503	38112	Single-gang	Steel box	1	4	6.129	3.812	3.582
TVBS505*	37955	2-Gang	Steel box w/ white non-metallic trim plate	1	4	6.698	6.012	3.937
TVBS505BL	20740	2-Gang	Steel box w/ black non-metallic trim plate	1	4	6.698	6.012	3.937
TVBS507*	37956	3-Gang	Steel box w/ white non-metallic trim plate	1	4	6.205	7.930	3.937
TVBS613	09633	4-Gang	Steel box with white non-metallic trim plate	1	1	7.000	17.000	3.848
TVBS613BL	09660	4-Gang	Steel box with black non-metallic trim plate	1	1	7.000	17.000	3.848
TVB613C†	15250	4-Gang	4-Gang white cover	5	5	7.000	17.000	.127



PATENTED.

†MADE IN USA.

*Optional box covers available on page Q-3.

FEATURES AND BENEFITS

- Easy to install, secure installation
- Optional covers for unused boxes
- Mounting wings on two- and three-gang styles hold boxes securely against the wall in retrofit projects
- Boxes screw mount to stud in new construction
- Steel box with non-metallic paintable white or black trim plate



Scan For Video



INSTALLATION INSTRUCTIONS

NEW WORK



Attach box to stud using #6 screws. Pull wires.




After drywall is installed, add trim plate, then install enclosure assembly to wall with outer screws.

RETRO FIT



Cut a hole using enclosure without trim plate, as template. Mounting wings hold box in wall.

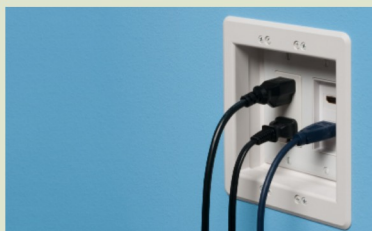

Finished install shot.

