


Power Supply & Battery Charger

ELK-P412

**LIFETIME
WARRANTY**

The ELK-P412 is a general purpose high current power supply and battery charger. It is ideal for alarm, access control, and CCTV applications requiring up to 4 Amps. The ELK-P412 distributes 12VDC power to three (3) sets of DC power terminals, each having a voltage present indicator LED and automatic resetting overload protection. It also features a master On/Off switch and built-in low battery cut-off to protect the backup battery from deep discharging if AC power is off for an extended time.

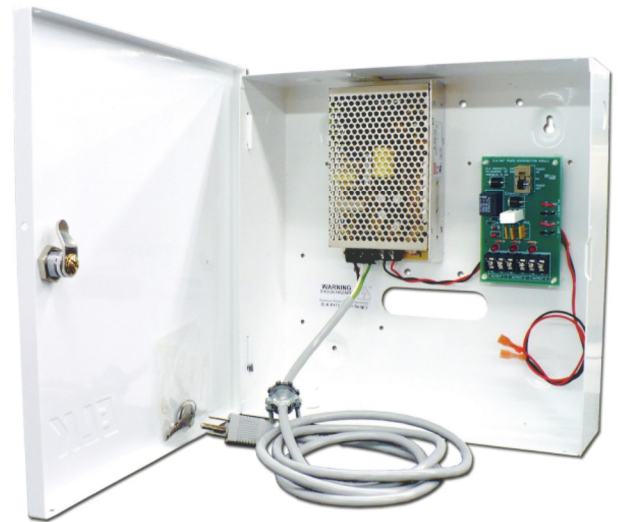

FEATURES

- Switching Power Supply, no transformer needed
- Auto Reset “fuseless” Overload Protection (PTC)
- Three (3) Individual PTC Protected Power Outputs
- Master Power On/Off Switch
- Built-in Low Battery Cutoff Circuit
- Visual Power Indicators
- AC and DC Surge Suppression
- Includes Six foot AC Power Cord
- Lifetime Limited Warranty

SPECIFICATIONS

- Regulated Output Voltage: 13.8 Volts D.C.
- Continuous Current Rating: 4 Amps
- AC Input Voltage Range: 85~264 VAC @ 47-63Hz
- Low Battery Cutoff: $\sim$ /= 10 Volts
- Ripple and Noise: 100mV p-p
- Dimensions: 12”W x 12”H x 3.5”D



Solutions for Serious Security and Automation Professionals

(800) 797-9355 | www.elkproducts.com