

Post-Mount No-Touch Sensor with Access Box


SD-9963-KSGQ

The ENFORCER Post-Mount No Touch Sensor with Access Box is a full-featured exit plate that uses IR technology to allow egress from a protected area or activate a device with the simple wave of a hand.

Features:

- Adjustable sensor range up to 7" (18cm)
- Weather resistant for outdoor use
- Stainless-steel face-plate
- Hinged plate easily removes from box for easy wiring
- Adjustable trigger duration 0.8~30 seconds or toggle (ON/OFF)
- Form C relay, rated 1A@30VDC
- Operating voltage: 12~24 VDC
- Gooseneck- or wall-mountable
- Manual override button
- LED-illuminated sensor area for easy identification
- Selectable LED colors (turns from red to green or green to red) on sensor activation
- Includes heavy-duty steel box

Wiring Diagram:

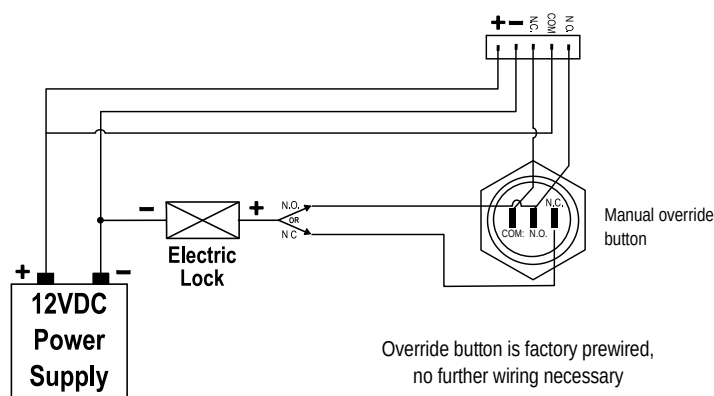

Specifications:

Operating voltage		12~24 VDC
Current draw (max.)	Standby	16mA@12VDC / 25mA@24VDC
	Triggered	25mA@12VDC / 32mA@24VDC
Relay type		Form C dry contact, 1A@30VDC
Response time		10ms
LEDs	Standby	Red ¹
	Triggered	Green ¹
Output time		0.8~30 s or toggle
Range		2"~7" (5~18 cm)
IP Rating		IP65 ²
Temperature range		-4°~131° F (-20°~55° C)
Weight		1-lb 9-oz (710g)
Size		4"x5½"x3" (102x134x77 mm)

¹Color function reversible

²Front panel only

SECO-LARM® U.S.A., Inc.

16842 Millikan Avenue, Irvine, CA 92606

Phone: (949) 261-2999 | (800) 662-0800 Fax: (949) 261-7326

Website: www.seco-larm.com Email: sales@seco-larm.com



Copyright 2014 © SECO-LARM U.S.A., Inc. All rights reserved.
All trademarks are the property of SECO-LARM U.S.A., Inc. or their respective owners.
The SECO-LARM policy is one of continual development. For that reason, SECO-LARM reserves the right to change prices and specifications without notice. SECO-LARM is not responsible for misprints.

SECO-LARM® ENFORCER® CRIMEBUSTER® CBA SLI®

PiSD-9963-KSGQ_141226.docx