


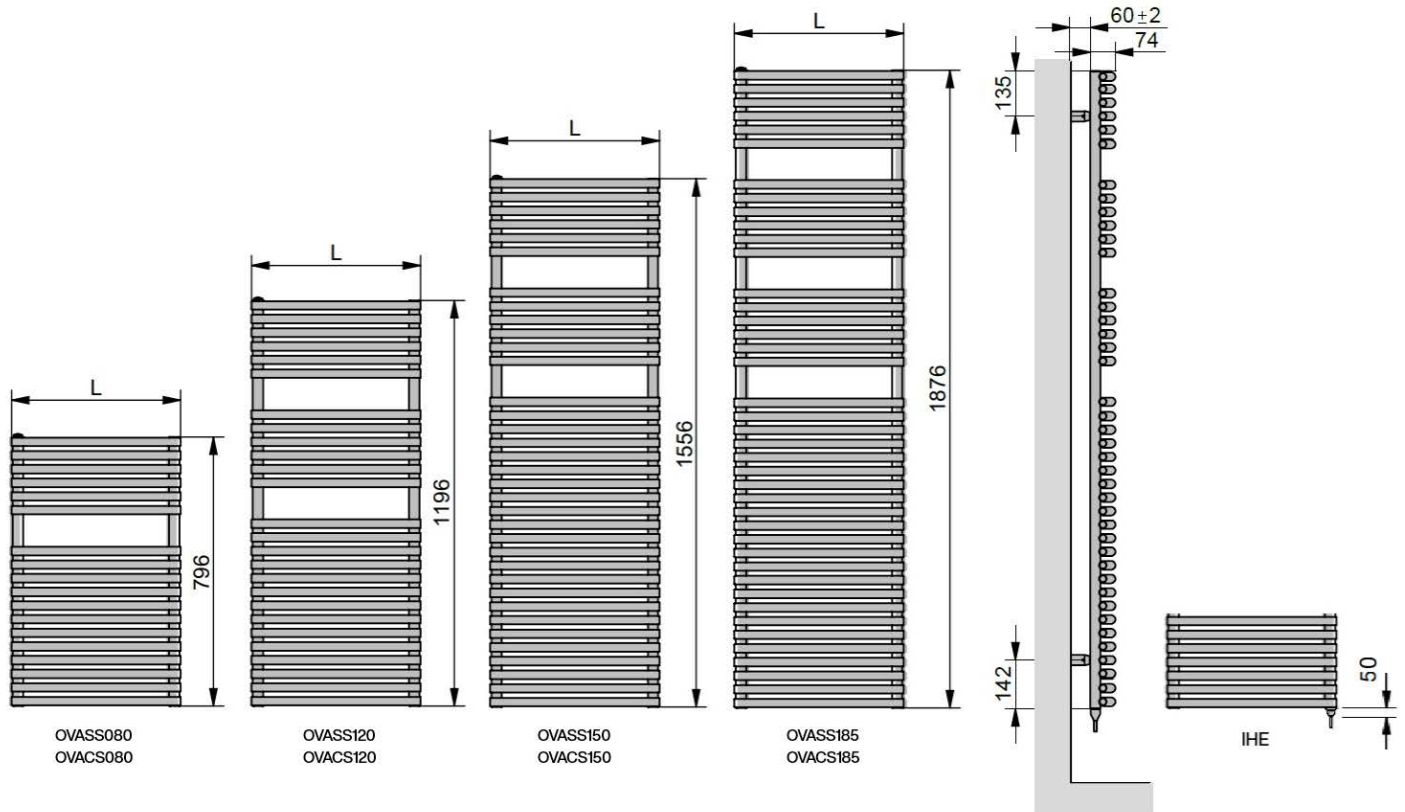

All dimensions shown are in millimetres

All steel construction: **dia 25mm x 1.2mm tubes**
dia 30mm x 1.5mm headers

Connections: **1.2m long flying lead (3 core)**

Immersion heater rating: **IP65**

** does not include immersion heater*

Model	Height* ± 2mm	Width ± 2mm	Finish	Output Watts	Weight kg
OVASS080050EAZK	796	496	painted	400	12.7
OVASS080060EAZK	796	596	painted	400	14.7
OVASS120050EAZK	1196	496	painted	600	18.4
OVASS120060EAZK	1196	596	painted	600	21.3
OVASS150050EAZK	1556	496	painted	900	24.6
OVASS150060EAZK	1556	596	painted	900	28.5
OVASS185050EAZK	1876	496	painted	1200	29.0
OVASS185060EAZK	1876	596	painted	1200	33.5
OVACS080050EAZK	796	496	chrome	200	12.7
OVACS080060EAZK	796	596	chrome	200	14.7
OVACS120050EAZK	1196	496	chrome	400	18.4
OVACS120060EAZK	1196	596	chrome	400	21.3
OVACS150050EAZK	1556	496	chrome	400	24.6
OVACS150060EAZK	1556	596	chrome	600	28.5
OVACS185050EAZK	1876	496	chrome	600	29.0
OVACS185060EAZK	1876	596	chrome	600	33.5

Issue 1.1

Zehnder Ovida Bow Electric

zehnder

Tools & Material Required

Tape measure
Electric drill
Masonry drill bit - 8mm diameter
Spirit level
Stepladder (for taller radiators)

Key	Component	Qty
A	Bracket Post	4
B	Spacer	4
C	Wall Plug	4
D	Bracket	4
E	Screw - 6mm dia x 50mm	4
F	Washer	4
G	Grub Screw	4
H	Allen Key	1

Assembly Instructions

Screw bracket posts (A) & spacers (B) onto studs on the rear of the radiator.

Accurately mark out bracket holes on wall using spirit level.


Drill four 8mm diameter holes to a minimum depth of 65mm & insert wall plugs (C).

Screw brackets (D) into wall plugs (C) with screws (E) & washers (F).

Slide bracket post (A) on radiator into bracket (D) and secure in position by tightening grub screw (G) with allen key (H).

Electric radiators should be fitted only by a qualified electrician and must be earthed and connected to a cable outlet in the bathroom in accordance with I.E.E. wiring regulations. The electrical connection should be made to a '5 amp fused fixed spur' located outside the bathroom.

Note: for maintenance purposes, cable outlets must remain accessible and cables must not be buried directly into walls.

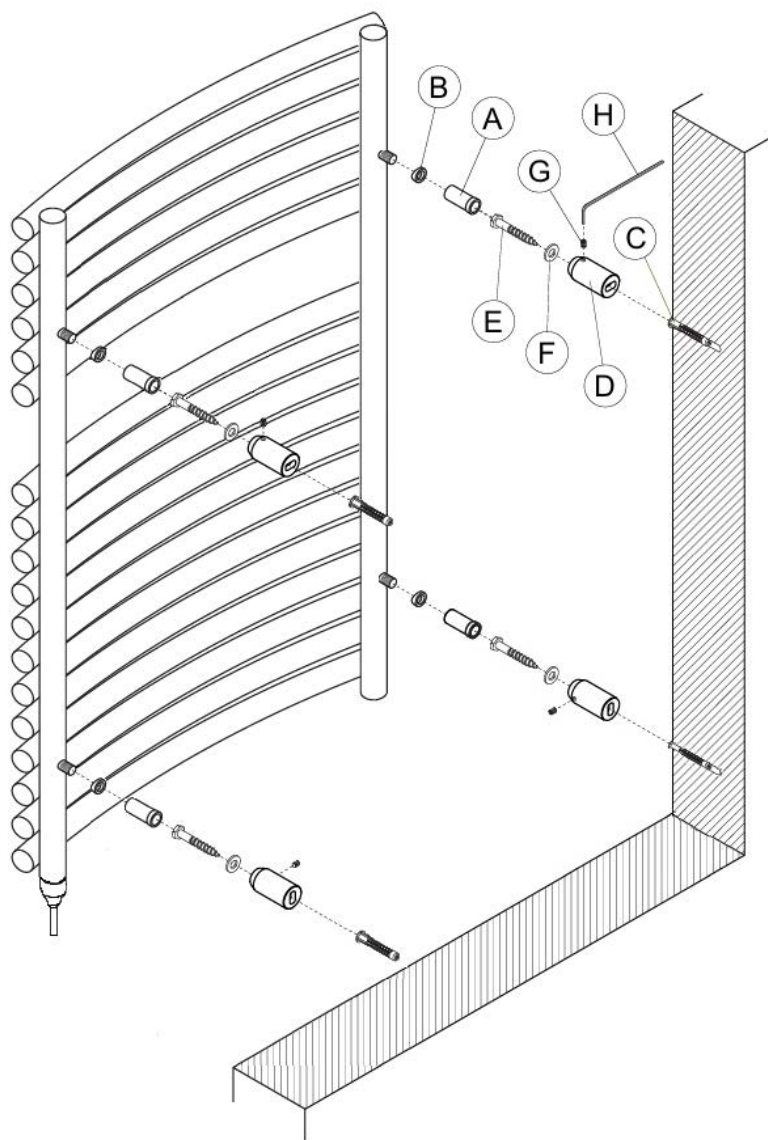

Issue 1.1



Zehnder Group UK Ltd

Concept House
Watchmoor Point
Camberley
Surrey GU15 3AD

Tel: 01276 605800
Fax: 01276 24058
retailsales@zehnder.co.uk
www.zehnder.co.uk

Registered in England: 2296696