



319/345 Receiver Module

For Communication with Peripherals using 319 and 345 Frequencies

INSTALL INSTRUCTIONS


The 2GIG 319/345 MHz Receiver is designed to be installed into the 2GIG Control Panel. This Receiver is a dual frequency device, enabling communication between the Control Panel and peripheral devices that use either the 319 or the 345 MHz frequency.

TIP: To supervise peripheral devices using the 319 and 345 MHz frequencies, install this Receiver Module into the Control Panel.

IMPORTANT: This 319/345 MHz Receiver excludes the use of the 2GIG-TS1 Wireless Keypad!


What you'll need

- 319/345 Receiver Module
- 319/345 Antenna

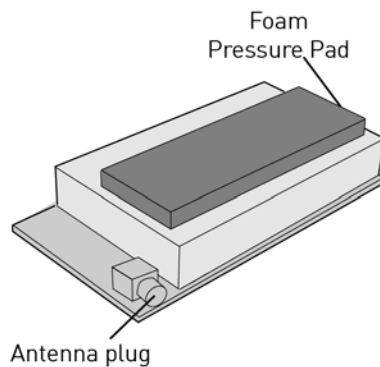


BEFORE INSTALLING

- 1 Disconnect the power from the Control Panel.
 - 1a Un-plug the AC Power Supply.
 - 1b Open the Control Panel.
 - 1c Disconnect the backup battery.

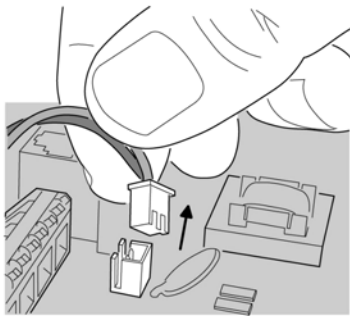

- 2 To disconnect the 900 MHz Transceiver Module inside the Control Panel, pull straight up. If you don't pull the module straight up, there is a danger of breaking either the 3-pin or 5-pin connectors.

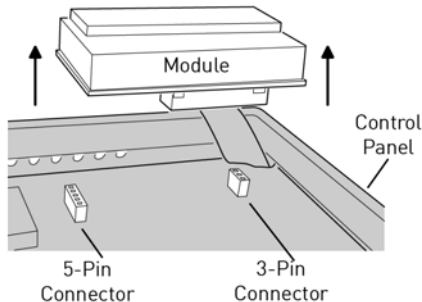


TIP: The module is located behind the **Home Button** on the main circuit panel.




INSTALLING THE 319/345 RECEIVER MODULE

- 1 Align the 319/345 MHz Receiver to the 3-Pin Connector.

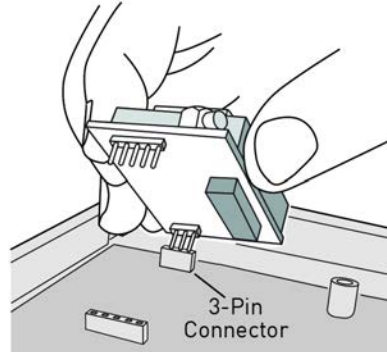


- 2 While maintaining previous alignment with the 3-pin connector, align the 319/345 Receiver to the 5-pin Connector.

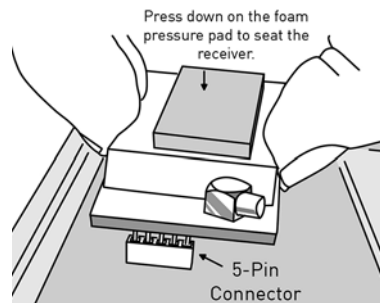


- 3 Press down on the foam pressure pad to seat the receiver.
- 4 After the receiver is properly seated, hold the receiver in place (in the control panel) while inserting the antenna plug fully into the 319/345 MHz Receiver antenna mating connector.

Mounting the Antenna

- 1 Untie the wire tie from the antenna.
- 2 Thread the antenna through the back of the Control Panel into the wall (where it can hang extended).

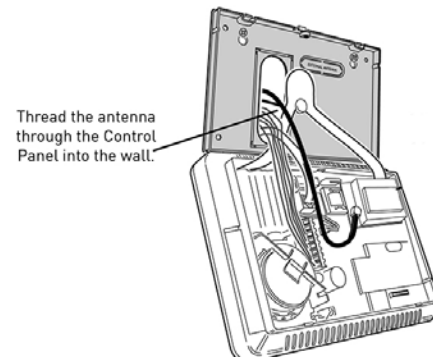

- 3 Reconnect the battery.
- 4 Close the Control Panel.
- 5 Plug in the AC Power Supply.

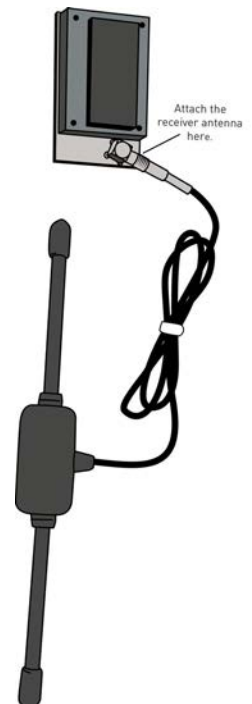

For technical support in the USA and Canada:
855-2GIG-TECH (855-244-4832)

For technical support outside of the USA and Canada:
Contact your regional distributor
Visit dealer.2gig.com for a list of distributors in your region.
PN 77-000026-001 Rev. A