


ITEM CODE	SDR	WEIGHT (LBS)	MAOP @ 73.4° F (PSI) WATER	MAOP @ 73.4° F (PSI) GAS	FM RATING
200306	7 / 9	0.60	335 / 250	125	FM 267 / FM 400

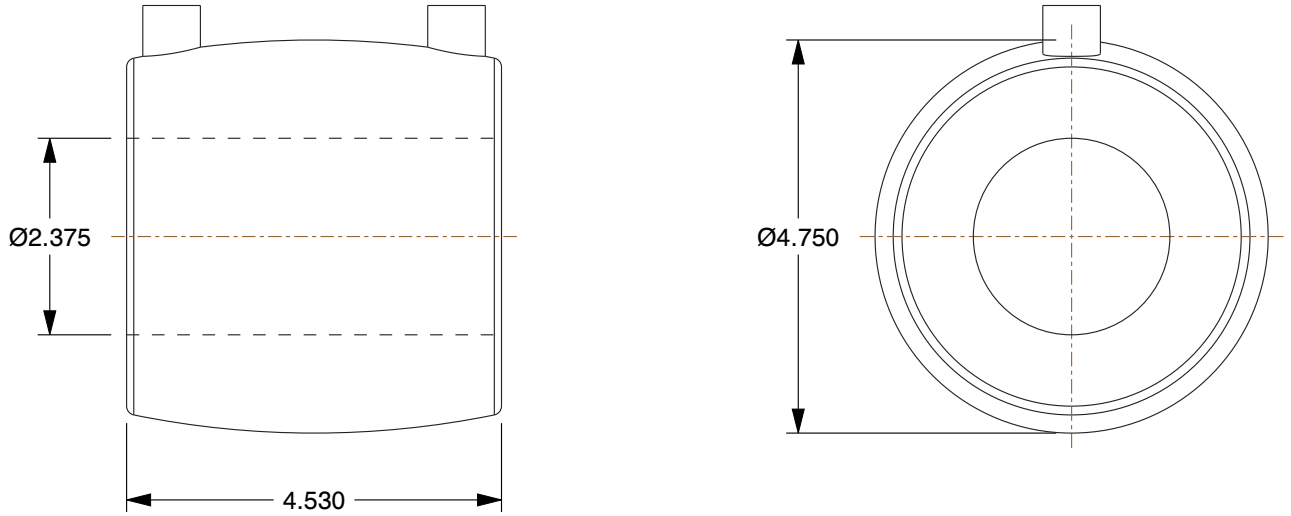

NOTES:
1. RESIN TYPE: ASTM D3350 DESIGNATED PE3408/PE4710/PE100.
2. RESIN CELL CLASS: 445574C-CC3.
3. STANDARDS COMPLIANCE: ASTM D2513, D3350, D3261, F714, AWWA C901/C906, AND ANSI/NSF 61, FM 1613.
4. ASTM TEST STANDARDS: ASTM D1598, D1599 AND D2122.
5. AVAILABLE STANDARD DIMENSION RATIOS: SDR 7, 9.
6. MADE IN USA MEETS TAA REQUIREMENTS.

American Water Works Association · NSF Certified to NSF/ANSI 61, 9,52 · FM APPROVED · TAA COMPLIANT

INTEGRITY Fusion Products, Inc.
270 Parkade Court
Peachtree City, GA 30269
Ph: 770-632-7530

This file and any associated information and specifications are provided for reference and evaluation purposes only, and is subject to change without notice. Integrity Fusion Products, Inc makes no representations, warranties or guarantees as to the appropriateness, accuracy, completeness, or suitability for any purpose, of the file, information or specifications. You are solely responsible for the use of the file, information or specifications.

2" IPS MOLDED SMALL DIAMETER ELECTROFUSION COUPLER

SCALE	NTS
UNIT	INCH
SHEET	1 of 1