

627 RIVERBANK DRIVE  
GENEVA, IL 60134  
630-232-0104

## Test Report

[www.riverbankacoustics.com](http://www.riverbankacoustics.com)

FOUNDED 1918 BY  
WALLACE CLEMENT SABINE

SPONSOR: **Carnegie Fabrics, LLC**  
Rockville Centre, NY

**Sound Absorption**  
**RAL™-A26-223**

CONDUCTED: 2026-05-01

Page 1 of 9

ON: Kirei 9mm PET Panel

### TEST METHODOLOGY

Riverbank Acoustical Laboratories™ is accredited by the U.S. Department of Commerce, National Institute of Standards and Technology (NIST) under the National Voluntary Laboratory Accreditation Program (NVLAP) as an ISO 17025:2017 Laboratory (NVLAP Lab Code: 100227-0) and for this test procedure. The test reported in this document conformed explicitly with ASTM C423-23: "Standard Test Method for Sound Absorption and Sound Absorption Coefficients by the Reverberation Room Method." The specimen mounting was performed according to ASTM E795-23: "Standard Practices for Mounting Test Specimens During Sound Absorption Tests." A description of the measurement procedure and room specifications are available upon request. The results presented in this report apply to the sample as received from the test sponsor.

### INFORMATION PROVIDED BY SPONSOR

The test specimen was designated by the sponsor as Kirei 9mm PET Panel. The following nominal product information was provided by the sponsor prior to testing. The accuracy of such sponsor-provided information can affect the validity of the test results.

#### **Product Under Test**

---

Product Name: Kirei 9mm PET Panel  
Manufacturer: Carnegie Fabrics, LLC

### SPECIMEN MEASUREMENTS & TEST CONDITIONS

Through a full external visual inspection performed on the test specimen, Riverbank personnel verified the following information:

#### **Test Specimen**

---

Dimensions: 2 panels @ 1226 mm (48.25 in.) by 2804 mm (110.375 in.)  
Thickness: 9.19 mm (0.362 in.)  
Overall Weight: 14.17 kg (31.25 lbs)  
Mass per Unit Volume: 224 kg/m<sup>3</sup> (14.0 lbs/ft<sup>3</sup>)

627 RIVERBANK DRIVE  
GENEVA, IL 60134  
630-232-0104

## Test Report

[www.riverbankacoustics.com](http://www.riverbankacoustics.com)

FOUNDED 1918 BY  
WALLACE CLEMENT SABINE

**Carnegie Fabrics, LLC**  
2026-05-01

**RAL™-A26-223**  
Page 2 of 9

### SPECIMEN MEASUREMENTS & TEST CONDITIONS (continued)

#### Overall Specimen Properties

Size: 2.45 m (96.5 in) wide by 2.8 m (110.375 in) long  
Thickness: 0.01 m (0.362 in)  
Weight: 14.17 kg (31.25 lbs)  
Mass per Unit Area: 2.06 kg/m<sup>2</sup> (0.42 lbs/ft<sup>2</sup>)  
Calculation Area: 6.872 m<sup>2</sup> (73.97 ft<sup>2</sup>)

#### Test Environment

Room Volume: 291.98 m<sup>3</sup>  
Temperature: 22.1 °C ± 0.1 °C (Requirement: ≥ 10 °C and ≤ 5 °C change)  
Relative Humidity: 58.85 % ± 0.7 % (Requirement: ≥ 40 % and ≤ 5 % change)  
Barometric Pressure: 98.9 kPa (Requirement not defined)

### MOUNTING METHOD

Type A Mounting: The test specimen was laid directly against the test surface. Perimeter edges were sealed with tape.

627 RIVERBANK DRIVE  
GENEVA, IL 60134  
630-232-0104

## Test Report

[www.riverbankacoustics.com](http://www.riverbankacoustics.com)

FOUNDED 1918 BY  
WALLACE CLEMENT SABINE

**Carnegie Fabrics, LLC**  
2026-05-01

**RAL™-A26-223**  
Page 3 of 9



Figure 1 – Specimen mounted in test chamber



Figure 2 – Individual specimen panel

627 RIVERBANK DRIVE  
GENEVA, IL 60134  
630-232-0104

## Test Report

[www.riverbankacoustics.com](http://www.riverbankacoustics.com)

FOUNDED 1918 BY  
WALLACE CLEMENT SABINE

**Carnegie Fabrics, LLC**  
2026-05-01

**RAL™-A26-223**

Page 4 of 9



Figure 3 – Detail of specimen material

627 RIVERBANK DRIVE  
GENEVA, IL 60134  
630-232-0104

## Test Report

[www.riverbankacoustics.com](http://www.riverbankacoustics.com)

FOUNDED 1918 BY  
WALLACE CLEMENT SABINE

**Carnegie Fabrics, LLC**  
2026-05-01

**RAL™-A26-223**  
Page 5 of 9

### TEST RESULTS

Specimen total absorption and absorption coefficient are tabulated at the eighteen standard frequencies. A graphic presentation of the data and additional information appear on the following pages.

1/3 Octave Center Frequency (Hz)	Total Absorption (m <sup>2</sup> )	Total Absorption (Sabins)	Absorption Coefficient
100	0.56	6.01	0.08
** 125	-0.16	-1.73	-0.02
160	-0.01	-0.13	0.00
200	0.28	3.03	0.04
** 250	0.35	3.72	0.05
315	0.37	3.99	0.05
400	0.43	4.61	0.06
** 500	0.95	10.19	0.14
630	1.32	14.21	0.19
800	1.99	21.43	0.29
** 1000	2.72	29.23	0.40
1250	3.53	37.97	0.51
1600	4.33	46.56	0.63
** 2000	5.00	53.77	0.73
2500	5.64	60.74	0.82
3150	6.09	65.54	0.89
** 4000	6.46	69.54	0.94
5000	6.93	74.59	1.01

**SAA = 0.33**  
**NRC = 0.35**



627 RIVERBANK DRIVE  
GENEVA, IL 60134  
630-232-0104

## Test Report

[www.riverbankacoustics.com](http://www.riverbankacoustics.com)

FOUNDED 1918 BY  
WALLACE CLEMENT SABINE

**Carnegie Fabrics, LLC**  
2026-05-01

**RAL™-A26-223**  
Page 6 of 9


### TEST RESULTS (continued)

The sound absorption average (SAA) is defined in ASTM C423-23 Section 3.1.1 as the arithmetic average of the sound absorption coefficients of a material for the twelve one-third octave bands from 200 Hz through 2500 Hz, inclusive, rounded to the nearest integer multiple of 0.01.

The noise reduction coefficient (NRC) is defined from previous versions of ASTM C423 as the arithmetic average of the sound absorption coefficients at 250 Hz, 500 Hz, 1000 Hz, and 2000 Hz, rounded to the nearest integer multiple of 0.05.

Tested by   
Marc Sciaky  
Senior Experimentalist

Report by   
Keith Kimberling  
Test Engineer

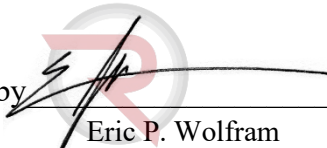Approved by   
Eric P. Wolfram  
Laboratory Manager

627 RIVERBANK DRIVE  
GENEVA, IL 60134  
630-232-0104

## Test Report

[www.riverbankacoustics.com](http://www.riverbankacoustics.com)

FOUNDED 1918 BY  
WALLACE CLEMENT SABINE


Carnegie Fabrics, LLC  
2026-05-01

**RAL™-A26-223**

Page 7 of 9

### SOUND ABSORPTION REPORT

Kirei 9mm PET Panel

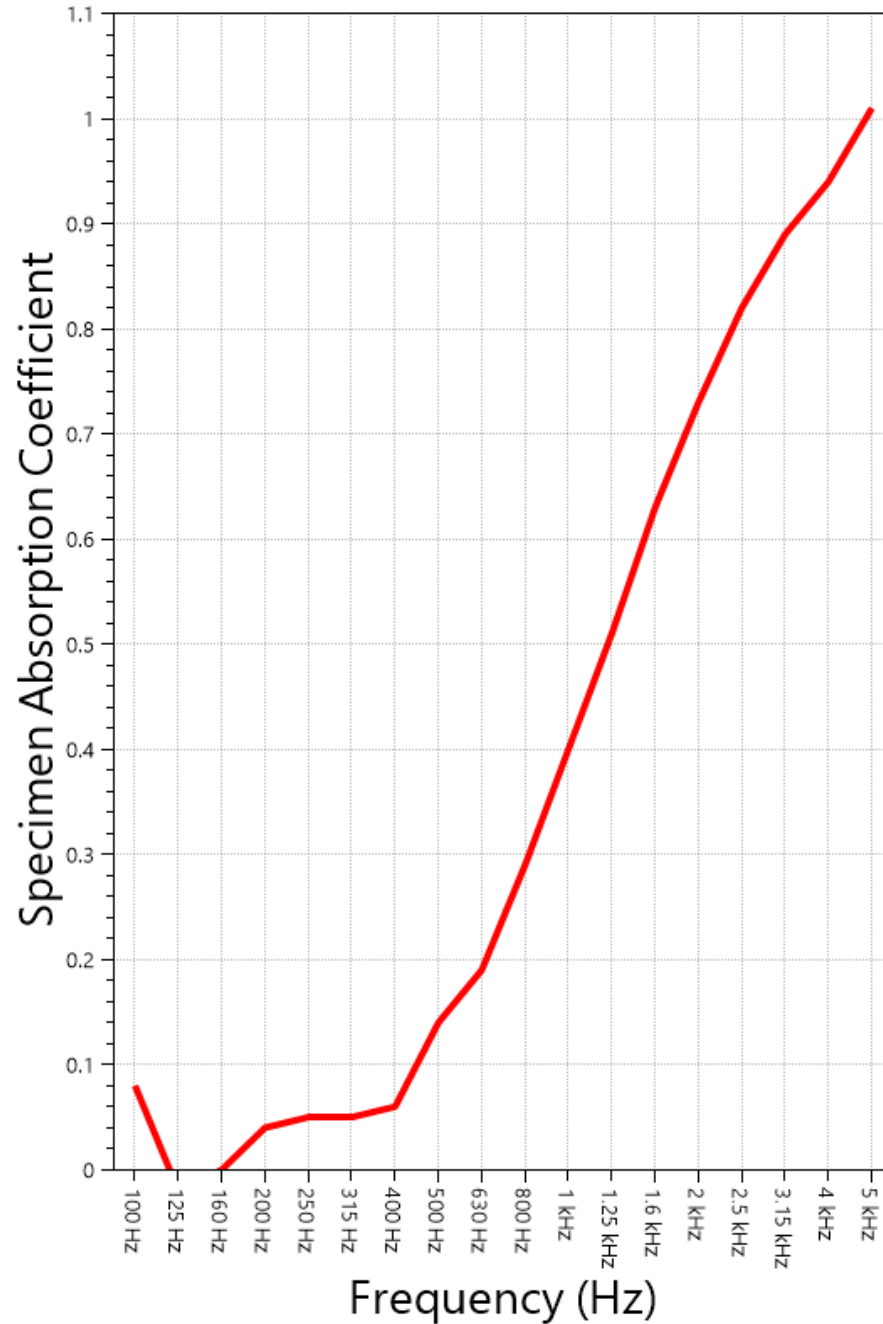

**SAA = 0.33**

**NRC = 0.35**

627 RIVERBANK DRIVE  
GENEVA, IL 60134  
630-232-0104

## Test Report

[www.riverbankacoustics.com](http://www.riverbankacoustics.com)

FOUNDED 1918 BY  
WALLACE CLEMENT SABINE

Carnegie Fabrics, LLC  
2026-05-01

**RAL™-A26-223**  
Page 8 of 9

### **APPENDIX A: Extended Frequency Range Data**

Specimen: Kirei 9mm PET Panel (See Full Report)

*The following non-accredited data were obtained in accordance with ASTM C423-23, but extend beyond the defined frequency range of 100Hz to 5,000Hz. These unofficial results are representative of the RAL test environment only and intended for research & comparison purposes.*

1/3 Octave Band Center Frequency (Hz)	Total Absorption (Sabins)	Absorption Coefficient
31.5	-7.68	-0.10
40	-0.70	-0.01
50	-1.06	-0.01
63	1.93	0.03
80	-3.20	-0.04
100	6.01	0.08
125	-1.73	-0.02
160	-0.13	0.00
200	3.03	0.04
250	3.72	0.05
315	3.99	0.05
400	4.61	0.06
500	10.19	0.14
630	14.21	0.19
800	21.43	0.29
1000	29.23	0.40
1250	37.97	0.51
1600	46.56	0.63
2000	53.77	0.73
2500	60.74	0.82
3150	65.54	0.89
4000	69.54	0.94
5000	74.59	1.01
6300	78.17	1.06
8000	76.79	1.04
10000	76.85	1.04
12500	76.94	1.04



627 RIVERBANK DRIVE  
GENEVA, IL 60134  
630-232-0104

Test Report

[www.riverbankacoustics.com](http://www.riverbankacoustics.com)

FOUNDED 1918 BY  
WALLACE CLEMENT SABINE

Carnegie Fabrics, LLC  
2026-05-01

**RAL™-A26-223**  
Page 9 of 9

**APPENDIX B: Instruments of Traceability**

Specimen: Kirei 9mm PET Panel (See Full Report)

<u>Description</u>	<u>Model</u>	<u>Serial Number</u>	<u>Date of Certification</u>	<u>Calibration Due</u>
System 1	Type 3160-A-042	3160-106968	2025-07-21	2026-07-21
Bruek & Kjaer Mic and Preamp H	Type 4943-B-001	2525859	2025-11-18	2026-11-18
Bruel & Kjaer Pistonphone	Type 4228	2781248	2025-07-21	2026-07-21
EXTECH Hygro 639	SD700	A.103639	2025-12-29	2026-12-29

**APPENDIX C: Revisions to Original Test Report**

Specimen: Kirei 9mm PET Panel (See Full Report)

<u>Date</u>	<u>Revision</u>
2026-05-20	Original report issued

---

END