

Specs

Style	Standard (LxH)	Width	Weight	LF/Unit
40" Length Baffle	40 in. x 9 in.	3.31in	4.5 lbs	3.3
48" Length Baffle	48 in. x 9 in.	3.31 in	5 lbs	4
72" Length Baffle	72 in. x 9in.	3.31 in	8 lbs	6
96" Length Baffle	96 in. x 9 in.	3.31in	10 lbs	8

All specs refer to singular products and not multiples unless specified. Due to the nature of the material, cutting and fabrication process, minor dimensional variances may occur. Custom options available upon request.

Designer	Kirei		
Panel Thickness	12mm		
Material	100% PET (60% post-consumer recycled)		
Fire Rating	ASTM E84 Class A		
Custom Options	Available upon request		
Lead Time	*4-6 weeks (1-150 baffles) For larger quantities, lead times determined per order		
VOC Emissions	CDPH (CA 01350) Compliant TVOC: <0.5 mg/m3 Ecospecifier GreenTag Compliant TVOC: 0.015 mg/m2/hr (ASTM D5116)		

^{*}Actual lead times are determined when the project goes into production and can change based on production schedule and all quantities, color and thicknesses being in stock at time of order. See Kirei's Product Lead Time Disclosure for more information.












Acoustic Data


Sound Absorption


Frequency	250Hz	500Hz	800Hz	1000Hz	2000Hz	4000Hz	Average
m²/Object	1.94	5.10	5.85	6.49	6.27	5.96	4.75

Acoustic data is measured in Sabins per H Baffle.

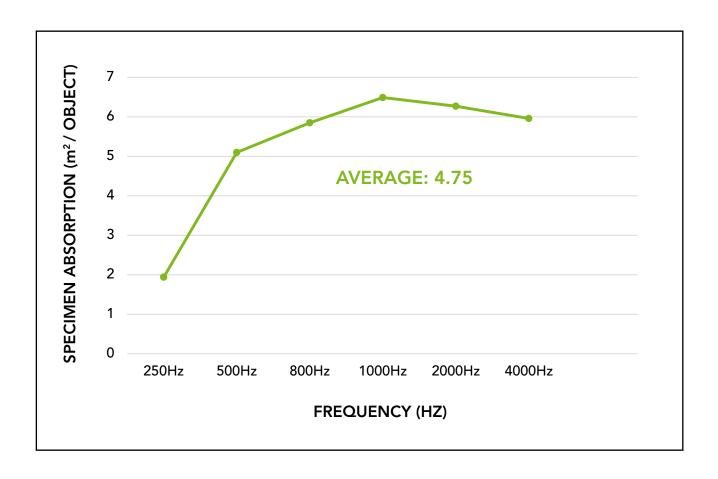

Product Dimensions

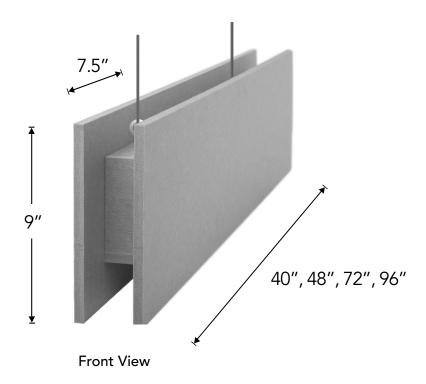



Available Colors



Color variation between dye lots is a natural characteristic of recycled PET felt due to the manufacturing process. Slight differences between samples and finished product may occur.

Installation

H Baffles have two attachment points with a ¼"-20 female thread and come with your choice of eyebolts or ¼"-20 male threaded screw hardware. To install H Baffles, attach the specified ceiling mounting hardware and suspension cable/chain/rod/etc. with the appropriate connector at the bottom end. Once the ceiling hardware is installed, attach the connector to the supplied attachment hardware on the H Baffle. For instructions on how to install baffles in a variety of ways, see the H Baffles Installation Guide.

Note: Kirei does not provide ceiling mounting hardware or cable/chain/rod.



Eyebolt Mounting Hardware

Custom Printing with Kirei Ink

H Baffles can be custom printed in house with Kirei Ink. We would love to work with you to print your own custom color, pattern, graphic or material. Reach out and our team will be ready to assist!


<u>Please note</u>: Kirei requires written permission from the copyright holder in order to reproduce any copyrighted work. Professional photographs cannot be reproduced without written permission from the photographer.



Product shown: H Baffles in Color 442 (Grey)



Product shown: H Baffles in Color 542 (Black)

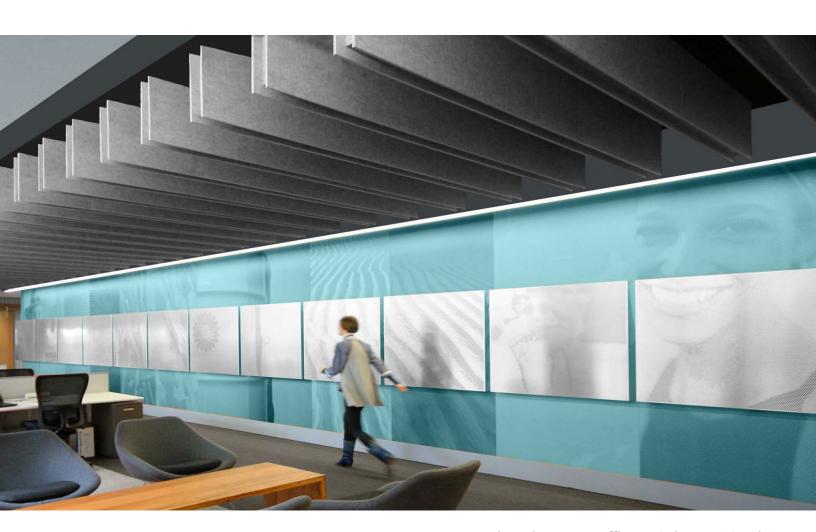

Product shown: H Baffles in Color 444 (Smoke)



Product shown: H Baffles in Color 442 (Grey)

kirei

Learn more and request your free sample: 619.236.9924 | sales@kireiusa.com kireiusa.com