





Powerline 1300 AV2 Adapter Kit

TPL-422E2K (v1.0R)

- Includes two TPL-422E adapters
- Powerline 1300 networking over existing electrical lines
- Enhanced Powerline performance and coverage from MIMO with Beamforming technology
- Encrypted TRENDnet adapters auto-connect out of the box
- Gigabit port for high-speed connectivity
- Powerline range up to 300m (984 ft.)
- Two Powerline adapters are required to start a network
- Cross compatible with Powerline 1200, 600, 500, and 200 adapters

TRENDnet's Powerline 1300 AV2 Adapter Kit, model TPL-422E2K, comes with two Powerline adapters to create a high-speed Powerline 1300 network using your home's existing electrical system. Two adapters are needed to start a network. TRENDnet adapters are protected with 128-bit AES Encryption. Plug in the first adapter and network it to your existing router. Plug in other adapters on the same electrical system and they auto-connect to the first adapter for instant internet access.

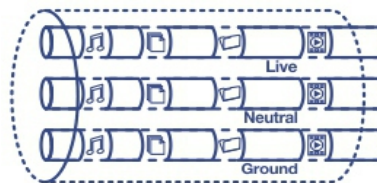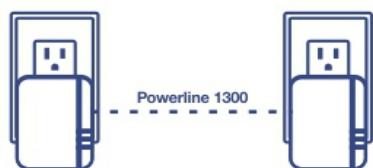

Simple Plug-in Installation

No configuration needed – simply plug in TRENDnet Powerline adapters and they will auto-connect out of the box.


High-Speed Powerline 1300

Powerline 1300 technology and a gigabit port deliver fast and stable networking to seamlessly connect devices and stream 4K video.

MIMO Technology

Multiple Input Multiple Output (MIMO) Powerline with Beamforming technology uses live, neutral, and ground wires to increase performance between adapters.

Networking Solution

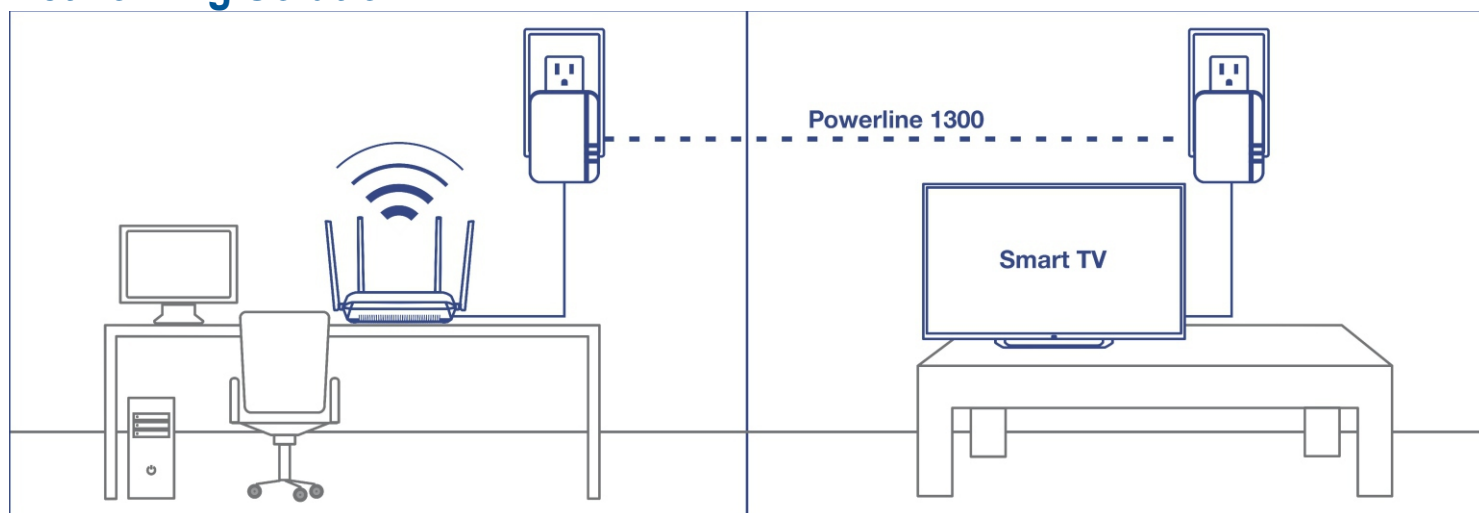

Sync Button

Press the Sync button to change existing Powerline encryption keys



Cross Compatibility

Cross compatible with Powerline 1200, 600, 500, and 200 adapters



Easy Installation

TRENDnet adapters auto-connect out of the box



Powerline 1300

Powerline 1300 technology delivers fast and stable networking to seamlessly connect devices and stream 4K video.



Expandable

Use up to 8 adapters on a single Powerline network



MIMO with Beamforming Technology

Multiple Input Multiple Output (MIMO) Powerline with Beamforming technology uses live, neutral, and ground wires to increase performance between adapters.



Gigabit Port

Gigabit port for computers, smart TVs, or other network enabled devices



128-bit AES Encryption

Powerline communication is protected with 128-bit AES encryption

Specifications

Standards	• IEEE 802.3 • IEEE 802.3u • IEEE 802.3x • IEEE 802.3ab • IEEE 1901 • IEEE 1905.1	Special Features	• Auto-connects to other TRENDnet Powerline adapters • IPv6 support • IGMP / MLDv2 Streams
Device Interface	• 1 x Gigabit LAN port • Sync button • Reset button • LED indicators	Optional Utility: OS Compatibility	• Windows® 10, 8.1, 8, 7, Vista, XP
Power plug	• North America Type B (NEMA 5–15)	Power	• Input: 100 - 240V AC, 50-60Hz • Consumption: Active mode: 4W (max.); Standby mode: 0.5W (max.)
Frequency Band	• 2 – 67.5MHz	Operating Temperature	• 0 – 50°C (32 – 122°F)
Modulation/ Protocol	• OFDM, 4096/1024/256/64/16/8-QAM, QPSK, BPSK, ROBO, HS-ROBO, Mini-ROBO • CSMA/CA	Operating Humidity	• Max. 90 % non-condensing
Data PHY Rate	• Up to 1300Mbps	Certifications	• FCC • IC • ETL
Networking Distance	• Powerline: Up to 300m (980ft.) linear distance over electrical power lines***	Dimensions	• 58 x 77 x 65 mm (2.3 x 3.0 x 2.6 in.)
Encryption	• 128-Bit AES (Advanced Encryption Standard)	Weight	• 108g (3.8 oz.)
Powerline Nodes	• Up to 8 (max.)	Warranty	• 3 year
Overlapping Powerline Networks	• Up to 4 (per electrical system)	PACKAGE CONTENTS • 2 x TPL-422E • Quick Installation Guide • CD-ROM (Utility & User's Guide) • 2 x Network cable (1.5 m/5 ft.)	

* Maximum of 8 adapters (nodes) recommended for streaming video across your network.

** 1.3 Gbps is the maximum theoretical Powerline data rate when connected to another Powerline 1300 device. Data throughput may vary by circuit wire conditions. If an electrical system does not have a grounded connection, the theoretical networking speed is reduced to 650 Mbps.

*** Powerline communication works on a single electrical system. (Usually controlled by a single distribution panel). Power strip, GFCI outlets, and AFCI circuit breakers may degrade Powerline network signals.